


Capacitor, tantalum, 150 uF, +/-20% Tol, 15V@85C

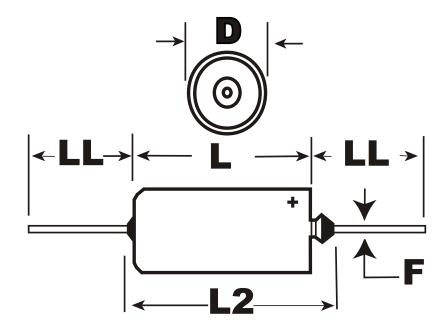

Dimensions (mm)

Specifications

| ID | Dimension | Tolerance | Manufacturer: | KEMET |
|----|-----------|-----------|----------------------|-------------------------------|
| D | 8.92 | +/-0.25 | Value: | 150 uF |
| L1 | 19.96 | +/-0.79 | Voltage DC @ 85C: | 15V |
| L2 | 23.42 | +0 | Voltage DC @ 125C: | 10V |
| F | 0.64 | +/-0.05 | Tolerance: | +/-20% |
| LL | 38.1 | +/-6.35 | Application: | Military ER/General Purpose |
| | | | Body Type: | Axial Hermetic ('cs13-style') |
| | | | Temperature Range: | -55/+125C |
| | | | ESR: | 600 mOhm |
| | | | ESR Frequency @ 25C: | 100kHz |
| | | | Leakage Current: | 8 uA |
| | | | Dissipation Factor: | 6% |
| | | | Package Kind: | Bulk |
| | | | Package Type: | Tray |

Notes

-Dimensions include insulating sleve (standard)

-L

