


Capacitor, tantalum, 22 uF, +/-20% Tol, 35V@85C

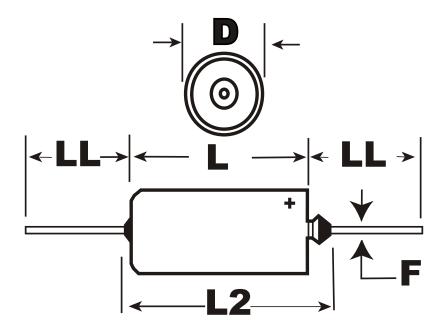

Dimensions (mm)

ID	Dimension	Tolerance
D	7.34	+/-0.25
L1	17.42	+/-0.79
L2	20.88	+0
F	0.64	+/-0.05
LL	38.1	+/-6.35

Specifications

KEMET	
22 uF	
35V	
23V	
+/-20%	
Military ER/Low ESR/High Current	
Axial Hermetic ('cs13-style')	
-55/+125C	
160 mOhm	
100kHz	
4 uA	
4%	
Bulk	
Tray	
Max Ripple Current @25C @40KH	
amps	

Notes:

-Dimensions include insulating sleve (standard) -C



© 2006-2011 IntelliData.net

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.