


Capacitor, tantalum, 22 uF, +/-5% Tol, 35V@85C

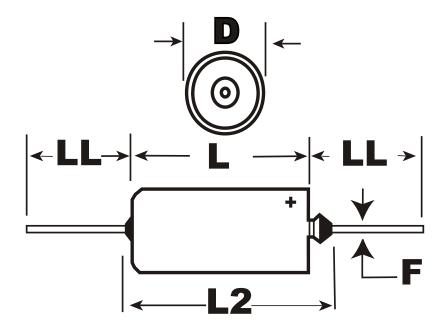

Dimensions (mm)

Dimension

Tolerance

Specifications

Manufacturer:

KEMET

amps

D	7.34	+/-0.25	Value:	22 uF
L1	17.42	+/-0.79	Voltage DC @ 85C:	35V
L2	20.88	+0	Voltage DC @ 125C:	23V
F	0.64	+/-0.05	Tolerance:	+/-5%
LL	38.1	+/-6.35	Application:	Military ER/Low ESR/High Current
			Body Type:	Axial Hermetic ('cs13-style')
			Temperature Range:	-55/+125C
			ESR:	160 mOhm
			ESR Frequency @ 25C:	100kHz
			Leakage Current:	4 uA
			Dissipation Factor:	4%
			Package Kind:	Bulk
			Package Type:	Tray
			Miscellaneous Electrical:	Max Ripple Current @25C @40KHz = 2.1

Notes:

ID

-Dimensions include insulating sleve (standard)

-0

