


Capacitor, tantalum, 1.2 uF, +/-10% Tol, 20V@85C

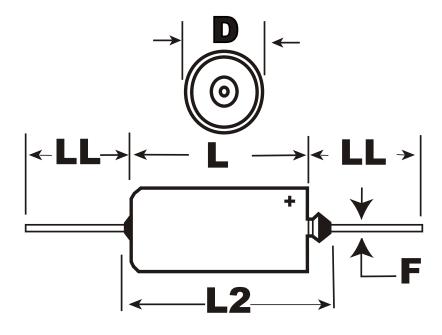

## **Dimensions (mm)**

## **Specifications**

ID	Dimension	Tolerance	Manufacturer:	KEMET
D	3.43	+/-0.25	Value:	1.2 uF
L1	7.26	+/-0.79	Voltage DC @ 85C:	20V
L2	10.72	+0	Voltage DC @ 125C:	13V
F	0.51	+/-0.05	Tolerance:	+/-10%
LL	38.1	+/-6.35	Application:	General Purpose
			Body Type:	Axial Hermetic ('cs13-style')
			Temperature Range:	-55/+125C
			ESR:	10 Ohm
			ESR Frequency @ 25C:	100kHz
			Leakage Current:	0.3 uA
			Dissipation Factor:	4%
			Package Kind:	Bulk
			Package Type:	Bag

## Notes

-When supplied on T&R or AMMO, lead length is determined by taping specification.

