


Capacitor, tantalum, 2.2 uF, +/-20% Tol, 50V@85C, Lead Spacing=2.54 mm

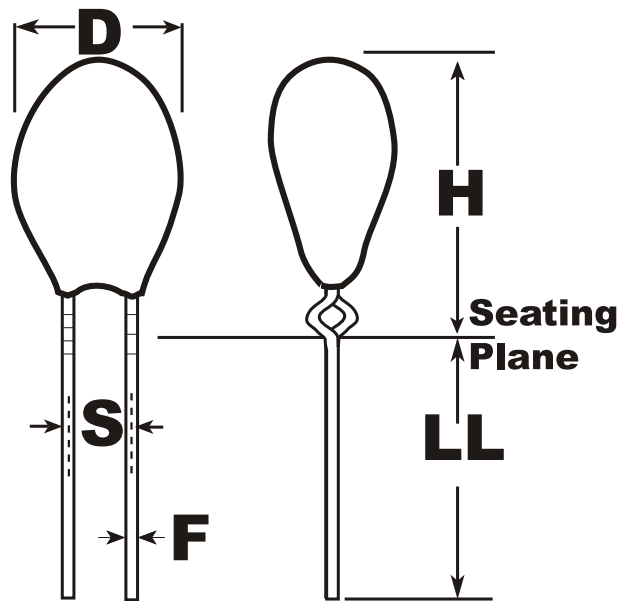

Dimensions (mm)

Specifications

ID	Dimension	Tolerance	Manufacturer:	KEMET
D	5.5	+0	Value:	2.2 uF
H	11.2	+0	Voltage DC @ 85C:	50V
F	0.5	+/-0.05	Voltage DC @ 125C:	33V
S	2.54	+/-0.38	Tolerance:	+/-20%
LL	4.75	+/-0.81	Body Type:	Radial Conformal ('dipped')
			Temperature Range:	-55/+125C
			Application:	General Purpose
			Termination Type:	Tin-Lead (SnPb)
			Leakage Current:	0.9 uA
			Dissipation Factor:	5%
			Package Kind:	Bulk
			Package Type:	Bag

Notes:
 -Height includes stand-off crimp