


Capacitor, tantalum, 22 uF, +/-20% Tol, 10V@85C, Lead Spacing=2.54 mm

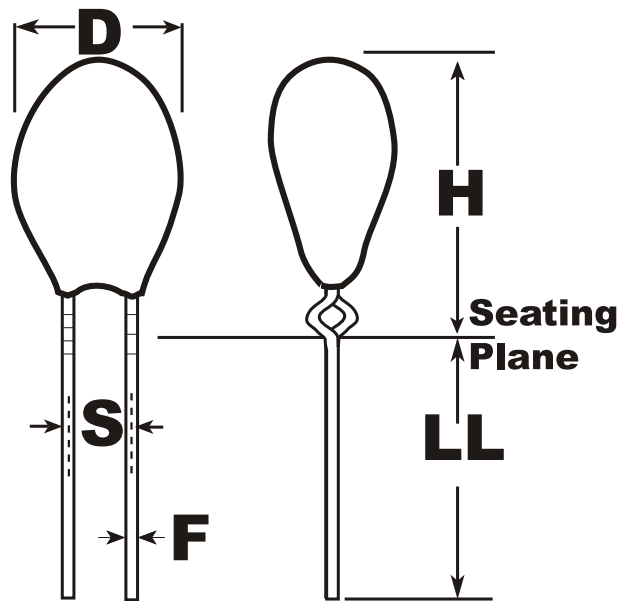

Dimensions (mm)

Specifications

| ID | Dimension | Tolerance | Manufacturer: | KEMET |
|----|-----------|-----------|---------------------|-----------------------------|
| D | 5.5 | +0 | Value: | 22 uF |
| H | 11.2 | +0 | Voltage DC @ 85C: | 10V |
| F | 0.5 | +/-0.05 | Voltage DC @ 125C: | 7V |
| S | 2.54 | +/-0.38 | Tolerance: | +/-20% |
| LL | 4.75 | +/-0.81 | Body Type: | Radial Conformal ('dipped') |
| | | | Temperature Range: | -55/+125C |
| | | | Application: | General Purpose |
| | | | Termination Type: | Tin-Lead (SnPb) |
| | | | Leakage Current: | 1.8 uA |
| | | | Dissipation Factor: | 6% |
| | | | Package Kind: | Bulk |
| | | | Package Type: | Bag |

Notes:
 -Height includes stand-off crimp