


Capacitor, tantalum, 4.7 uF, +/-10% Tol, 50V@85C, Lead Spacing=2.54 mm

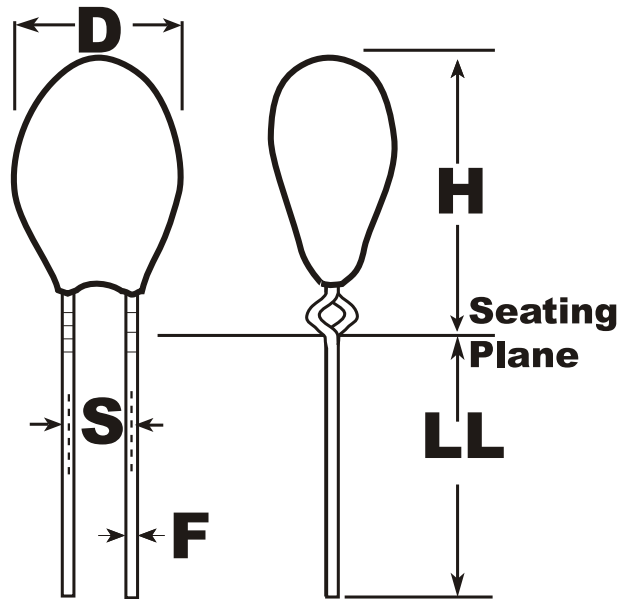

Dimensions (mm)

Specifications

ID	Dimension	Tolerance
D	6.3	+0
H	12.4	+0
F	0.5	+/-0.05
S	2.54	+/-0.38
LL	4.75	+/-0.81

Manufacturer:	KEMET
Value:	4.7 uF
Voltage DC @ 85C:	50V
Voltage DC @ 125C:	33V
Tolerance:	+/-10%
Body Type:	Radial Conformal ('dipped')
Temperature Range:	-55/+125C
Application:	General Purpose
Termination Type:	Tin-Lead (SnPb)
Leakage Current:	1.9 uA
Dissipation Factor:	5%
Package Kind:	Bulk
Package Type:	Bag

Notes:
 -Height includes stand-off crimp