


Capacitor, tantalum, 100 uF, +/-20% Tol, 6.3V@85C, Lead Spacing=2.54 mm

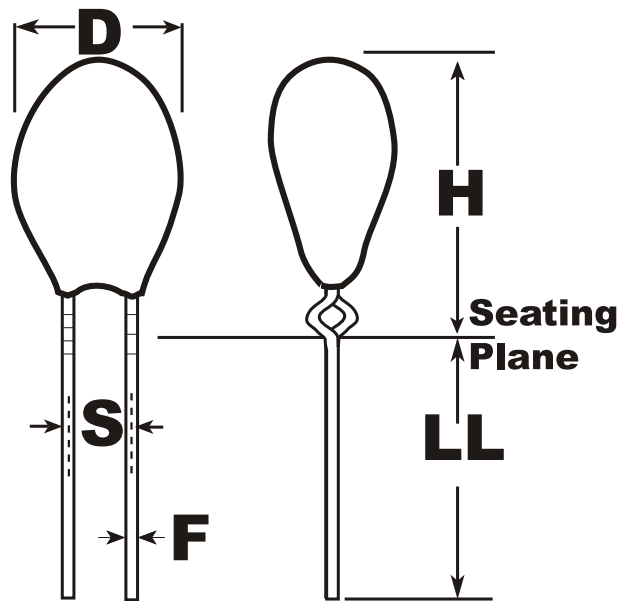

**Dimensions (mm)**

**Specifications**

ID	Dimension	Tolerance	Manufacturer:	KEMET
D	7.6	+0	Value:	100 uF
H	12.7	+0	Voltage DC @ 85C:	6.3V
F	0.5	+/-0.05	Voltage DC @ 125C:	4V
S	2.54	+/-0.38	Tolerance:	+/-20%
LL	4.75	+/-0.81	Body Type:	Radial Conformal ('dipped')
			Temperature Range:	-55/+125C
			Application:	General Purpose
			Termination Type:	Tin-Lead (SnPb)
			Leakage Current:	4.8 uA
			Dissipation Factor:	8%
			Package Kind:	Bulk
			Package Type:	Bag

Notes:  
 -Height includes stand-off crimp