


KEMET Part Number: T352A334K035AS



Capacitor, tantalum, 0.33 uF, +/-10% Tol, 35V@85C, Lead Spacing=5.08 mm

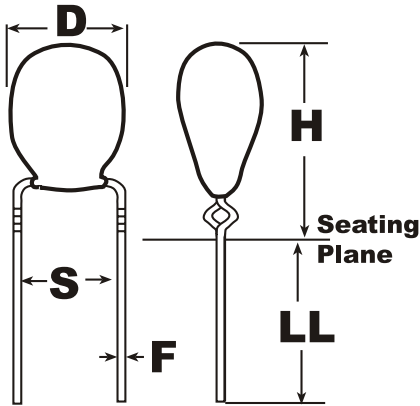

Dimensions (mm)		
Symbol	Dimension	Tolerance
D	4.5	+0
H	10.2	+0
F	0.5	+/-0.05
S	5.08	+/-0.38
LL	4.75	+/-0.81

Notes:  
-Height includes stand-off crimp

General Information	
Manufacturer:	KEMET

Electrical Specifications	
Value:	0.33 uF
Voltage DC @ 85C:	35V
Voltage DC @ 125C:	23V
Tolerance:	+/-10%
Body Type:	Radial Conformal ('dipped')
Temperature Range:	-55/+125C
Application:	General Purpose
Termination Type:	Tin-Lead (SnPb)
Leakage Current:	0.5 uA
Dissipation Factor:	3%
Package Kind:	Bulk
Package Type:	Bag

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.



Powered by IntelliData.net