


Capacitor, tantalum, 3.3 uF, +/-20% Tol, 25V@85C, Lead Spacing=5.08 mm

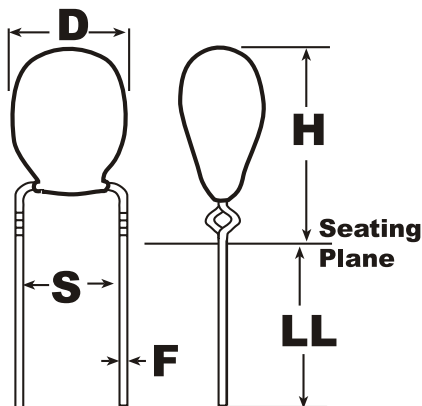

Dimensions (mm)		
Symbol	Dimension	Tolerance
D	4.5	+0
H	10.4	+0
F	0.5	+/-0.05
S	5.08	+/-0.38
LL	4.75	+/-0.81

Notes:  
 -Height includes stand-off crimp

General Information	
Manufacturer:	KEMET

Electrical Specifications	
Value:	3.3 uF
Voltage DC @ 85C:	25V
Voltage DC @ 125C:	16.5V
Tolerance:	+/-20%
Body Type:	Radial Conformal ('dipped')
Temperature Range:	-55/+125C
Application:	General Purpose
Termination Type:	Tin-Lead (SnPb)
Leakage Current:	0.7 uA
Dissipation Factor:	5%
Package Kind:	Bulk
Package Type:	Bag