


Capacitor, tantalum, 68 uF, +/-20% Tol, 10V @85C, Lead Spacing=5.08 mm

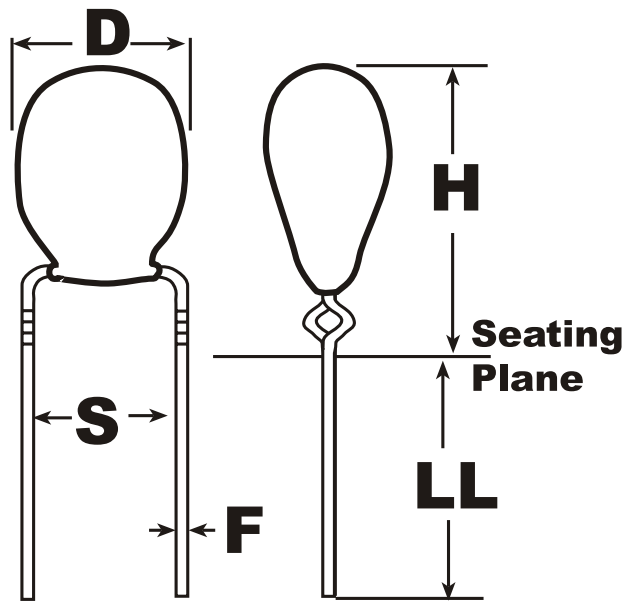

**Dimensions (mm)**

**Specifications**

ID	Dimension	Tolerance	Manufacturer:	KEMET
D	7.6	+0	Value:	68 uF
H	13.2	+0	Voltage DC @ 85C:	10V
F	0.5	+/-0.05	Voltage DC @ 125C:	7V
S	5.08	+/-0.38	Tolerance:	+/-20%
LL	4.75	+/-0.81	Body Type:	Radial Conformal ('dipped')
			Temperature Range:	-55/+125C
			Application:	General Purpose
			Termination Type:	Tin-Lead (SnPb)
			Leakage Current:	5.4 uA
			Dissipation Factor:	6%
			Package Kind:	Bulk
			Package Type:	Bag

Notes:  
 -Height includes stand-off crimp