


Capacitor, tantalum, 56 uF, +/-20% Tol, 16V@85C, Lead Spacing=5.08 mm

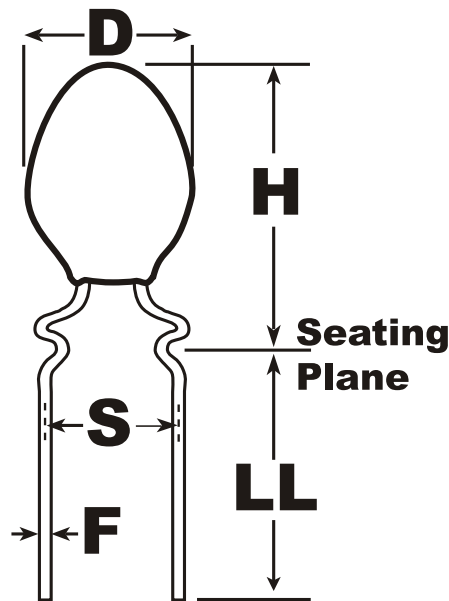

Dimensions (mm)

Specifications

| ID | Dimension | Tolerance | Manufacturer: | KEMET |
|----|-----------|-----------|---------------------|-----------------------------|
| D | 8.9 | +0 | Value: | 56 uF |
| H | 16 | +0 | Voltage DC @ 85C: | 16V |
| F | 0.5 | +/-0.05 | Voltage DC @ 125C: | 10V |
| S | 5.08 | +/-0.38 | Tolerance: | +/-20% |
| LL | 4.75 | +/-0.81 | Body Type: | Radial Conformal ('dipped') |
| | | | Temperature Range: | -55/+125C |
| | | | Application: | General Purpose |
| | | | Termination Type: | Tin-Lead (SnPb) |
| | | | Leakage Current: | 4.3 uA |
| | | | Dissipation Factor: | 8% |
| | | | Package Kind: | Bulk |
| | | | Package Type: | Bag |