


Capacitor, tantalum, 18 uF, +/-10% Tol, 50V @85C, Lead Spacing=6.35 mm

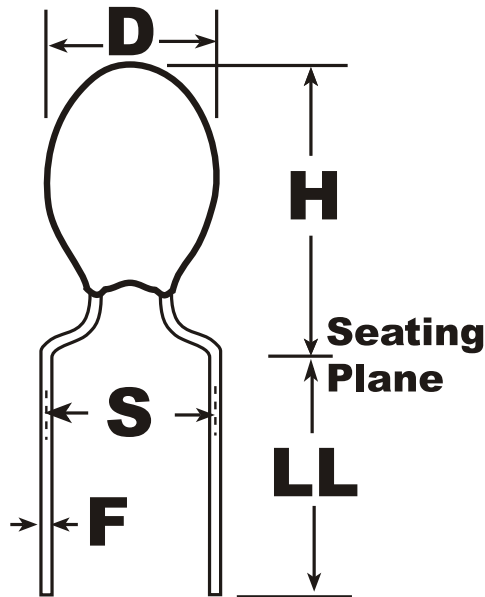

**Dimensions (mm)**

**Specifications**

ID	Dimension	Tolerance
D	8.9	+0
H	18.1	+0
F	0.5	+/-0.05
S	6.35	+/-0.38
LL	4.75	+/-0.81

<b>Manufacturer:</b>	KEMET
<b>Value:</b>	18 uF
<b>Voltage DC @ 85C:</b>	50V
<b>Voltage DC @ 125C:</b>	33V
<b>Tolerance:</b>	+/-10%
<b>Body Type:</b>	Radial Conformal ('dipped')
<b>Temperature Range:</b>	-55/+125C
<b>Application:</b>	General Purpose
<b>Termination Type:</b>	Tin-Lead (SnPb)
<b>Leakage Current:</b>	4.3 uA
<b>Dissipation Factor:</b>	8%
<b>Package Kind:</b>	Bulk
<b>Package Type:</b>	Bag