


Capacitor, tantalum, 82 uF, +/-10% Tol, 20V @85C, Lead Spacing=6.35 mm

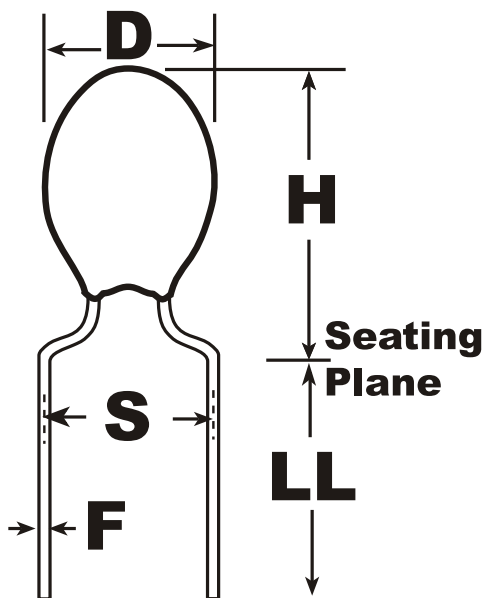

Dimensions (mm)

Specifications

ID	Dimension	Tolerance	Manufacturer:	KEMET
D	10.2	+0	Value:	82 uF
H	18.6	+0	Voltage DC @ 85C:	20V
F	0.5	+/-0.05	Voltage DC @ 125C:	13V
S	6.35	+/-0.38	Tolerance:	+/-10%
LL	4.75	+/-0.81	Body Type:	Radial Conformal ('dipped')
			Temperature Range:	-55/+125C
			Application:	General Purpose
			Termination Type:	Tin
			Leakage Current:	4.3 uA
			Dissipation Factor:	8%
			Package Kind:	Bulk
			Package Type:	Bag