


Capacitor, tantalum, 1.2 uF, +/-20% Tol, 25V@85C, Lead Spacing=3.18 mm

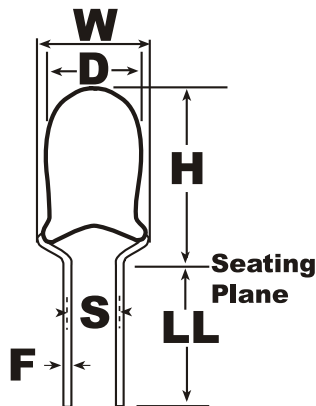

Dimensions (mm)		
Symbol	Dimension	Tolerance
D	4.5	+0
W	6.35	+/-0.64
H	8.6	+0
F	0.5	+/-0.05
S	3.18	+/-0.38
LL	4.75	+/-0.81

General Information	
Manufacturer:	KEMET

Electrical Specifications	
Value:	1.2 uF
Voltage DC @ 85C:	25V
Voltage DC @ 125C:	16.5V
Tolerance:	+/-20%
Body Type:	Radial Conformal ('dipped')
Temperature Range:	-55/+125C
Application:	General Purpose
Termination Type:	Tin
Leakage Current:	0.5 uA
Dissipation Factor:	5%
Package Kind:	Bulk
Package Type:	Bag