


Capacitor, tantalum, 0.22 uF, +/-20% Tol, 50V@85C, Lead Spacing=3.18 mm

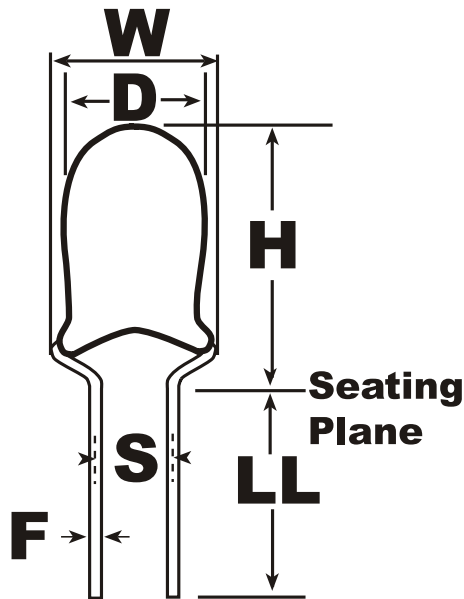

Dimensions (mm)

Specifications

Dimensions (mm)			Specifications	
ID	Dimension	Tolerance	Manufacturer:	KEMET
D	4.5	+0	Value:	0.22 uF
W	6.35	+/-0.64	Voltage DC @ 85C:	50V
H	8.6	+0	Voltage DC @ 125C:	33V
F	0.5	+/-0.05	Tolerance:	+/-20%
S	3.18	+/-0.38	Body Type:	Radial Conformal ('dipped')
LL	4.75	+/-0.81	Temperature Range:	-55/+125C
			Application:	General Purpose
			Termination Type:	Tin-Lead (SnPb)
			Leakage Current:	0.5 uA
			Dissipation Factor:	3%
			Package Kind:	Bulk
			Package Type:	Bag