


Capacitor, tantalum, 27 uF, +/-10% Tol, 25V@85C, Lead Spacing=5.08 mm

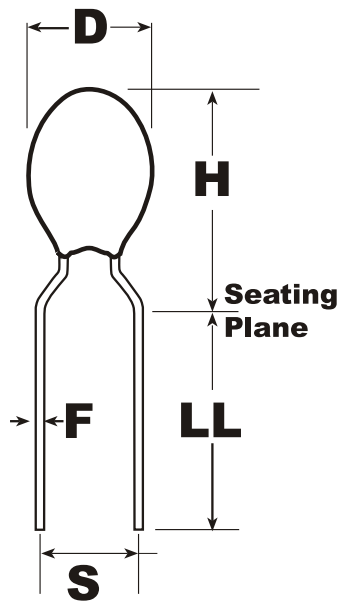

**Dimensions (mm)**

**Specifications**

Dimensions (mm)			Specifications	
<b>ID</b>	<b>Dimension</b>	<b>Tolerance</b>	<b>Manufacturer:</b>	KEMET
<b>D</b>	8.4	+0	<b>Value:</b>	27 uF
<b>H</b>	14	+0	<b>Voltage DC @ 85C:</b>	25V
<b>F</b>	0.5	+/-0.05	<b>Voltage DC @ 125C:</b>	16.5V
<b>S</b>	5.08	+/-0.38	<b>Tolerance:</b>	+/-10%
<b>LL</b>	4.75	+/-0.81	<b>Body Type:</b>	Radial Conformal ('dipped')
			<b>Temperature Range:</b>	-55/+125C
			<b>Application:</b>	General Purpose
			<b>Termination Type:</b>	Tin-Lead (SnPb)
			<b>Leakage Current:</b>	4.3 uA
			<b>Dissipation Factor:</b>	8%
			<b>Package Kind:</b>	Bulk
			<b>Package Type:</b>	Bag