


Capacitor, tantalum, 68 uF, +/-10% Tol, 10V@85C, Lead Spacing=2.54 mm

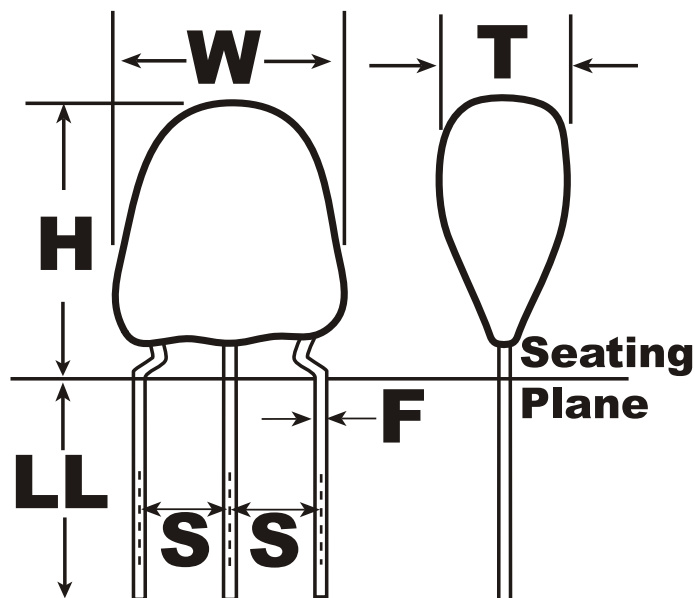

Dimensions (mm)

Specifications

ID	Dimension	Tolerance	Manufacturer:	KEMET
W	7.1	+0	Value:	68 uF
T	6.9	+0	Voltage DC @ 85C:	10V
H	11.2	+0	Tolerance:	+/-10%
F	0.5	+/-0.05	Body Type:	Radial Three Leaded
S	2.54	+/-0.2	Temperature Range:	-55/+125C
LL	4.75	+/-1.27	Application:	General Purpose
			Termination Type:	Tin-Lead (SnPb)
			Leakage Current:	5.4 uA
			Dissipation Factor:	6%
			Package Kind:	Bulk
			Package Type:	Bag

Notes:
 -Three leaded device: cumulative lead spacing tolerance is 0.38 mm