


Surface Mount PCB Lithium Coin Cell Battery Retainers

For 6.8mm up to 24mm Diameter Cells

Available on Tape & Reel

Ideal for Wave Soldering Applications

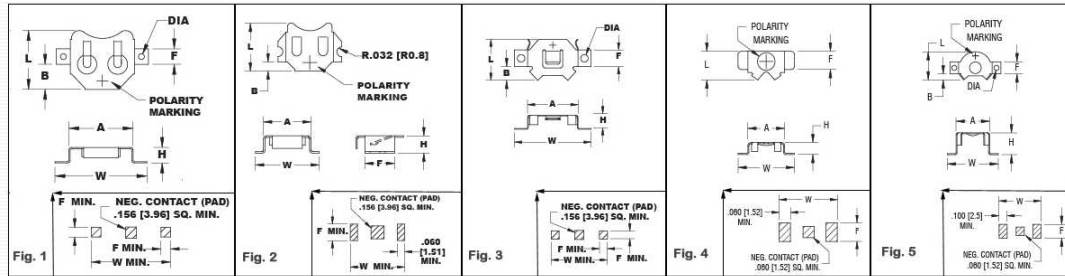

Cat No. (Bulk)	Fig.	A	B	Dia	F	H	L	W	Cell Size	Tape & Reel Spec's*	Cat. No. (On tape)
2994**	4	.202 [5.1]	.041 [1.0]	No Hole	.100 [2.5]	.065 [1.7]	.157 [4.0]	.315 [8.0]	4.8mm	24mm Wide; 12mm Pitch; 13" Reel (1250 per Reel)	2994TR**
2998	2	.315 [8.0]	.060 [1.5]	.032 [81] Rad.	.197 [5.0]	.114 [2.9]	.315 [8.0]	.421 [10.7]	6.8mm	24mm Wide; 12mm Pitch; 13" Reel (1250 per Reel)	2998TR
2988**	5	.346 [8.8]	.061 [1.6]	.052 [1.3]	.125 [3.2]	.225 [5.7]	.290 [7.4]	.526 [13.4]	7.9mm	24mm Wide; 12mm Pitch; 13" Reel (1000 per Reel)	2988TR**
3030	3	.418 [10.6]	.113 [2.8]	.062 [1.5]	.138 [3.5]	.116 [2.9]	.339 [8.6]	.634 [16.1]	10mm		3030TR
2996	1	.520 [13.2]	.203 [12.1]	.052 [1.3]	.125 [3.2]	.235 [6.0]	.475 [12.1]	.700 [17.8]	11.6mm	32mm Wide; 16mm Pitch; 13" Reel (600 per Reel)	2996TR
3000	1	.520 [13.2]	.203 [12.1]	.047 [1.2]	.125 [3.2]	.125 [3.2]	.475 [12.1]	.745 [18.9]	12mm	32mm Wide; 16mm Pitch; 13" Reel (1000 per Reel)	3000TR
3012	1	.664 [16.9]	.281 [7.1]	.047 [1.2]	.125 [3.2]	.156 [4.0]	.594 [15.0]	.914 [23.2]	16mm	44mm Wide; 24mm Pitch; 13" Reel (600 per Reel)	3012TR
3002	1	.831 [21.1]	.317 [8.0]	.093 [2.3]	.200 [5.1]	.156 [4.0]	.782 [19.8]	1.210 [30.7]	20mm	44mm Wide; 24mm Pitch; 13" Reel (500 per Reel)	3002TR
3026	1	.831 [21.1]	.317 [8.0]	.093 [2.3]	.200 [5.1]	.085 [2.2]	.782 [19.8]	1.210 [30.7]	20mm	44mm Wide; 24mm Pitch; 13" Reel (500 per Reel)	3026TR
3020	1	.885 [22.5]	.433 [11.0]	.093 [2.3]	.200 [5.1]	156 [4.0]	.890 [22.6]	1.339 [34.0]	20mm†	56mm Wide; 32mm Pitch; 13" Reel (500 per Reel)	3020TR
3022	1	.939 [23.9]	.433 [11.0]	.093 [2.3]	.200 [5.1]	240 [6.1]	.877 [22.3]	1.339 [34.0]	20mm†	56mm Wide; 32mm Pitch; 13" Reel (250 per Reel)	3022TR
3010	1	.939 [23.9]	.375 [9.5]	.093 [2.3]	.200 [5.1]	240 [6.1]	.819 [20.1]	1.339 [34.0]	2354	56mm Wide; 32mm Pitch; 13" Reel (200 per Reel)	3010TR
3004	1	.939 [23.9]	.375 [9.5]	.093 [2.3]	.200 [5.1]	156 [4.0]	.832 [21.1]	1.339 [34.0]	23mm	56mm Wide; 32mm Pitch; 13" Reel (400 per Reel)	3004TR
3006	1	1.000 [25.4]	.406 [10.3]	.093 [2.3]	.200 [5.1]	156 [4.0]	.918 [23.3]	1.400 [35.6]	24mm		3006TR
3008	1	1.000 [25.4]	.406 [10.3]	.093 [2.3]	.200 [5.1]	230 [5.8]	.890 [22.6]	1.400 [35.6]	2450	56mm Wide; 32mm Pitch; 13" Reel (200 per Reel)	3008TR
Material: .010 [254] Phosphor Bronze							Finish: Tin Nickel Plate (** 2994/2994TR; 2988/2988TR Gold Flash Plate)				
* All conductive polystyrene carrier tape meets ANSI/EIA - 481 standard.											
† 3020 & 3022 supplied with insulator assembled to accommodate 2, 20mm dia batteries (for unassembled versions, order Cat. No. 3020-2 or 3022-2)											

Technical Bulletin for Solderability - Tin Nickel Plate

Battery Reference		
Cat. No.		Cell Size
2994	SR416, ML414, 337	4.8mm
2998	MC621, V364, SC621	6.8mm
2988	DA13, AZ13E, PR13H, V13AT	7.9mm
3030	BR1025, CR1025, DL1025	10mm
2996	SR44, LR44, 357, MS76, PX76A, G-13, 303, V313	11.6mm
3000	BR1216, CR1216, BR1220, CL1220, CR1220, BR1225	12mm
3012	BR1616, CR1612, CR1616, BR1620, CR1632	16mm
3002	BR2016, CR2016, DL2016, BR2020, CL2020, BR2025, CR2025, DL2025, DR2032, CR2032, DL2032	20mm
3026	BR2016, CR2016	20mm
3020	(2)BR2016, (2)CR2016, (2)DL2016, (1)DR2032, (1)CR2032, (1)DL2032	20mm
3020-2	(2)BR2016, (2)CR2016, (2)DL2016, (1)DR2032, (1)CR2032, (1)DL2032	20mm
3022	(2)BR2020, (2)CL2020, (2)BR2025, (2)CR2025, (2)DL2025, (1)DR2032, (1)CR2032, (1)DL2032	20mm
3022-2	(2)BR2020, (2)CL2020, (2)BR2025, (2)CR2025, (2)DL2025, (1)DR2032, (1)CR2032, (1)DL2032	20mm
3010	CR2354, DL2354	2354
3004	BR2320, CL2320, CR2320, BR2325, CR2325, DL2325, BR2330, CL2330	23mm
3006	CR2430, DL2430	24mm
3008	CR2450, DL2450	2450