


SOLDERLESS TERMINALS


SPECIFICATIONS: Terminals: EPT copper Insulation: Vinyl

RING TONGUE NON-INSULATED




CAT. NO.	WIRE RANGE (AWG)	FOR STUD SIZE	W	L	E	MATL THICK	BARREL	
							.250 (6.4) LONG I.D.	MAX. INSUL. DIA.
8200	22/18	6	.25 (6.4)	.60 (15.2)	.47 (11.9)	.030 (.76)	.070 (1.78)	
8201		8	.33 (8.4)	.70 (17.8)	.54 (13.7)			
8202		10	.33 (8.4)	.70 (17.8)	.54 (13.7)			
8203	16/14	6	.25 (6.4)	.60 (15.2)	.47 (11.9)	.030 (.76)	.090 (2.29)	
8204		8	.33 (8.4)	.70 (17.8)	.54 (13.7)			
8205		10	.33 (8.4)	.70 (17.8)	.54 (13.7)			
8206	12/10	6	.28 (7.1)	.68 (17.3)	.54 (13.7)	.040 (1.02)	.135 (3.4)	
8207		8	.38 (9.7)	.73 (18.5)	.54 (13.7)			
8208		10	.38 (9.7)	.73 (18.5)	.54 (13.7)			

RING TONGUE INSULATED



CAT. NO.	WIRE RANGE (AWG)	FOR STUD SIZE	W	L	E	MATL THICK	BARREL		MAX. INSUL. DIA.
							.250 (6.4) LONG I.D.	MAX. INSUL. DIA.	
8209	22/18 (Red)	6	.25 (6.4)	.80 (20.3)	.67 (17.0)	.030 (.76)	.070 (1.78)	.145 (3.7)	
8210		8	.33 (8.4)	.90 (22.9)	.74 (18.8)				
8211		10	.33 (8.4)	.90 (22.9)	.74 (18.8)				
8212	16/14 (Blue)	6	.25 (6.4)	.80 (20.3)	.67 (17.0)	.030 (.76)	.090 (2.29)	.170 (4.3)	
8213		8	.33 (8.4)	.90 (22.9)	.74 (18.8)				
8214		10	.33 (8.4)	.90 (22.9)	.74 (18.8)				
8215	12/10 (Yellow)	6	.28 (7.1)	.98 (24.9)	.84 (21.3)	.040 (1.02)	.135 (3.4)	.250 (6.4)	
8216		8	.38 (9.7)	1.03 (26.2)	.84 (21.3)				
8217		10	.38 (9.7)	1.03 (26.2)	.84 (21.3)				


BLOCK SPADE NON-INSULATED



Flanged

CAT. NO.	WIRE RANGE (AWG)	FOR STUD SIZE	W	L	E	MATL THICK	BARREL I.D.	FLANGED	
								CAT. NO.	CAT. NO.
8218	22/18	6	.30 (7.6)	.65 (16.5)	.50 (12.7)	.030 (.76)	.090 (2.29)	8236	8237
8219		8						8238	8239
8220		10						8240	8241
8221	16/14	6	.30 (7.6)	.65 (16.5)	.50 (12.7)	.030 (.76)	.090 (2.29)	8242	8243
8222		8						8244	8245
8223		10						8246	8247
8224	12/10	6	.32 (8.1)	.73 (18.5)	.54 (13.7)	.040 (1.02)	.135 (3.4)	8248	8249
8225		8						8250	8251
8226		10						8252	8253


BLOCK SPADE INSULATED



Flanged



CAT. NO.	WIRE RANGE (AWG)	FOR STUD SIZE	W	L	E	MATL THICK	BARREL		MAX. INSUL. DIA.	FLANGED CAT. NO.	
							.250 (6.4) LONG I.D.	MAX. INSUL. DIA.			
8227	22/18 (Red)	6	.30 (7.6)	.85 (21.6)	.70 (17.8)	.030 (.76)	.070 (1.78)	.145 (3.7)	.175 (4.4)	8245	
8228		8								8246	8247
8229		10								8248	8249
8230	16/14 (Blue)	6	.30 (7.6)	.85 (21.6)	.70 (17.8)	.030 (.76)	.090 (2.29)	.175 (4.4)	.250 (6.5)	8250	
8231		8								8251	8252
8232		10								8253	8254
8233	12/10 (Yellow)	6	.32 (8.1)	1.03 (26.2)	.84 (21.3)	.040 (1.02)	.135 (3.4)	.255 (6.5)		8255	
8234		8								8256	8257
8235		10								8258	8259

SNAP SPADE NON-INSULATED




CAT. NO.	WIRE RANGE (AWG)	FOR STUD SIZE	W	L	E	MATL THICK	BARREL	
							.250 (6.4) LONG I.D.	MAX. INSUL. DIA.
8254	22/18	6	.25 (6.4)	.68 (17.3)	.50 (12.7)	.030 (.76)	.070 (1.78)	
8255		8	.30 (7.6)					
8256		10	.32 (8.1)					
8257	16/14	6	.25 (6.4)	.68 (17.3)	.50 (12.7)	.030 (.76)	.090 (2.29)	
8258		8	.30 (7.6)					
8259		10	.32 (8.1)					
8260	12/10	6	.28 (7.3)	.73 (18.5)	.53 (13.6)	.040 (1.02)	.135 (3.4)	
8261		8	.32 (8.1)					
8262		10	.32 (8.1)					

SNAP SPADE INSULATED



CAT. NO.	WIRE RANGE (AWG)	FOR STUD SIZE	W	L	E	MATL THICK	BARREL		MAX. INSUL. DIA.
							.250 (6.4) LONG I.D.	MAX. INSUL. DIA.	
8263	22/18 (Red)	6	.25 (6.4)	.88 (22.4)	.70 (17.8)	.030 (.76)	.070 (1.78)	.145 (3.7)	
8264		8	.30 (7.6)						
8265		10	.32 (8.1)						
8266	16/14 (Blue)	6	.25 (6.4)	.88 (22.4)	.70 (17.8)	.030 (.76)	.090 (2.29)	.170 (4.3)	
8267		8	.30 (7.6)						
8268		10	.32 (8.1)						
8269	12/10 (Yellow)	6	.28 (7.3)	1.03 (26.2)	.83 (21.2)	.040 (1.02)	.135 (3.4)	.250 (6.4)	
8270		8	.32 (8.1)						
8271		10	.32 (8.1)						

HAND CRIMP TOOL

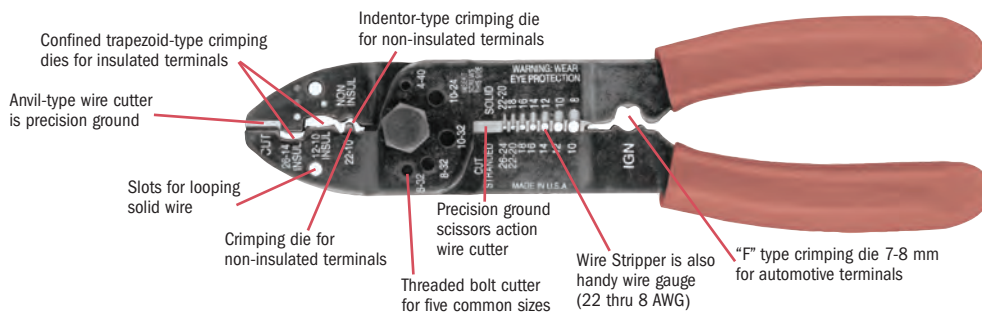

CAT. NO. 1345

Tel (718) 956-8900 • Fax (718) 956-9040
(800) 221-5510 • kec@keyelco.com

KEYSTONE
RoHS COMPLIANT ~ ISO 9001 CERTIFIED

www.keyelco.com
31-07 20th Road - Astoria, NY 11105-2017

SOLDERLESS TERMINALS