


DATE	DESCRIPTION	REV.
12.16.09	CHANGE AS PER ECN 09-187	A
3.10.11	CHANGE AS PER ECN 11-037	B
6.07.18	CHANGE AS PER ECN 18-023 INSULATOR WAS PBT	C

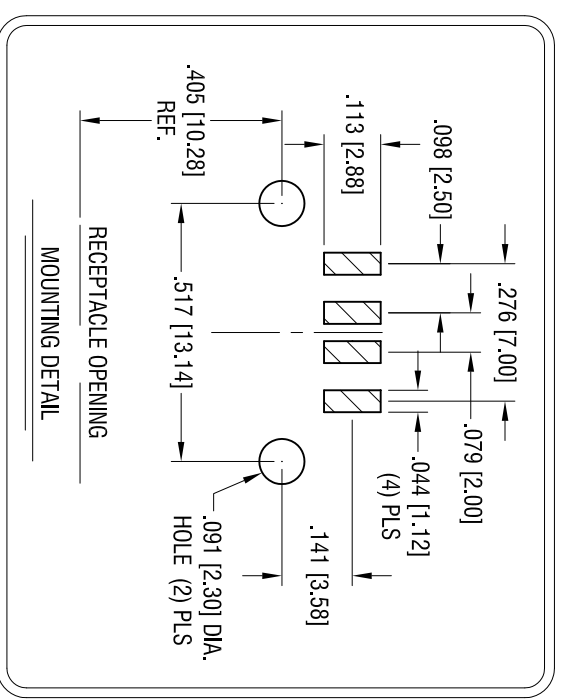

KEYSTONE ELECTRONICS CORP.

www.keystone.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

USB A-TYPE HORIZONTAL SMT SOCKET

MATERIAL

AS NOTED

FINISH

AS NOTED

TOLERANCES	INCH	[MM]	CODE	DWG NO.
DECIMAL	± .010	[± 0.25]	C	920
ANGULAR	± 1°			

Notes:

Material:

Shell: Brass, Nickel Plate.

Insulator: LCP

Contacts: Phosphor Bronze

Finish:

Contact Area: Gold Plate over Nickel Plate

on Solder Tail: Tin Plate over Nickel Plate

Electrical Specifications


Rated Voltage: 30V AC (rms)

Contact Current Rating: 1 A Max.

Contact Resistance: 30 milliohms Max.

Dielectric Withstanding: 750V AC

Operating Temperature: -55°C to 85°C



ACTUAL SIZE

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

DRN BY: BOONE DATE: 5.30.06

App'd: LN SCALE: 3X