

## GLX Series Right Angle Modular Jack

### Features



- 0.570" Height
- Snap-In Board Retention Tabs
- Available in 4, 6, 8 and 10 Position Housings
- UL Recognized File No. E134345
- CSA/NRTL Certified File No. LR78160

### Performance Specifications

#### Materials and Finish

##### Housing Material

PBT Thermoplastic, UL 94V-0 Rated, Gray Color

##### Contact Material

Phosphor Bronze

#### Electrical Characteristics

##### Insulation Resistance

500 Megohms Min

##### Dielectric Withstanding Voltage

1000V AC for 1 Minute

##### Contact Resistance

20 Milliohms Max

##### Current Rating

1.5 Amps

## MODULAR JACKS AND PLUGS


### GLX Series

#### Documentation & Ordering Information

|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |

#### Kycon Part #

#### Part Number Builder

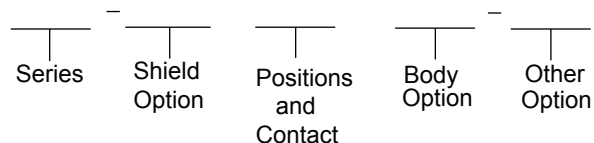

##### Series

GLX - Right Angle Modular Jack

##### Shield Option

A - Non - Shielded with Panel Stops

N - Non - Shielded with out Panel Stops

S - Shielded ( Available only with Short body Option)

##### Number of Positions and Contacts

44,62,64,66,88,1010

##### Body Option

Blank - Standard body

M - Short body

##### Other Option

Plating Option : Blank - Gold Flash

15 - 15µ" Gold Plating

50 - 50µ" Gold Plating

Color Option : Blank - Gray

BLK - Black

#### GLX Series Dimensions

Dimensions in mm

