



DETAIL A

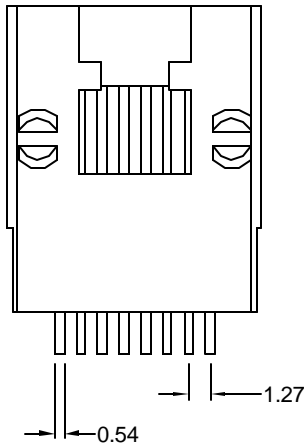

Recommended PCB Layout

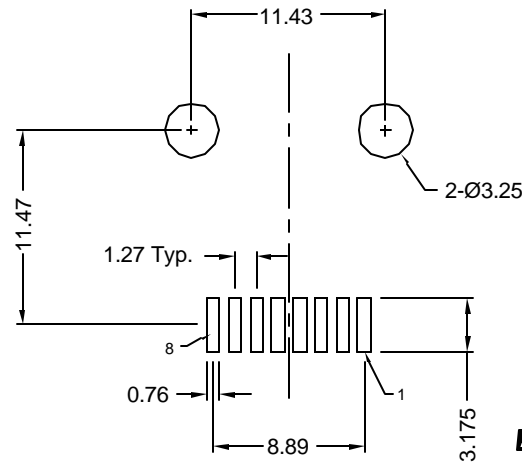

RoHS COMPLIANT
EU Directive 2002/95/EC

Electrical Performance

Category 5 100MHz Bandwidth Performance
Attenuation @ 100MHz less than 0.13dB
Performance meets near end crosstalk (NEXT)
Requirements of -40dB @ 100MHz per
EIA/TIA 568A in applications where UL
Approved Category 5 cable (GA27-3773-1)
is used

Shielded types offer 20dB shielding from
30MHz to 300MHz

Materials and Finish

Housing Material:
high temp. thermoplastic,
(reflow process compatible)
UL 94V-0 rated, black color

Recommended Reflow Temperature:
230°C for 30 seconds,
260°C max.

Design meets UL 1863 Sec. 8
Electrical Probe and Sec. 20
Child Finger test requirements

Contact Material: phosphor bronze

Contact Plating Options:
Standard: 0.0001" Nickel
Plating, Selective Plating
Gold Flash on Contact
Area, Tin on Termination End
50: 0.0001" Nickel Plating,
Selective Plating 0.000050"
Gold on Contact Area to
Comply with FCC Requirements
Under No. 47 C.F.R. Part 68,
Subpart F, Tin on Termination End

Electrical Characteristics

Insulation Resistance:
500 Megohms min.
Dielectric Withstanding Voltage:
1000V rms, 60Hz
Contact Resistance:
20 milliohms max.
Current Rating: 1.5 Amps
Durability Rating:
1000 mating cycles min.
Operating Temperature:
-40°C to +85°C
Oxygen Index
36%

Part Number	t_gold	Packaging
GMX-SMT2-N-88	Flash	Bulk
GMX-SMT2-N-88-50	50u"	Bulk
GMX-SMT2-N-88-TR	Flash	Tape & Reel
GMX-SMT2-N-88-50TR	50u"	Tape & Reel

Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise



REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	05/23/05	New Drawing	R. Aguirre	H. MA	R. Aguirre	05/23/05

GMX-SMT2-N-88

Right Angle Modular Jack, Non-Shielded, RoHS Compliant

8 position, 8 contacts, Surface Mount

