
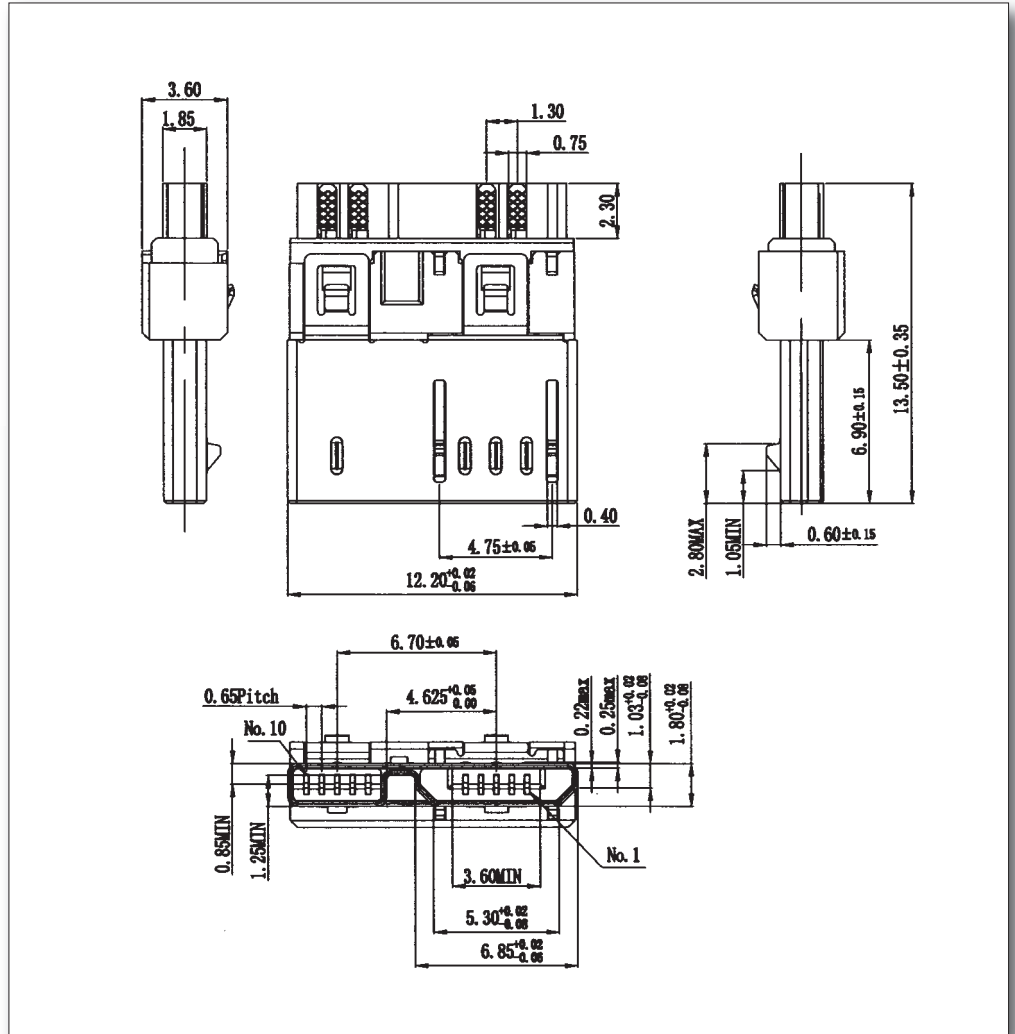


Micro USB3.0 Cable Mount Male B-Type Kit
VMUSB3-B-P-KIT Series

Black plastic inserts with gold (15 micron) plated contacts
Tin shell supplied
Mates with Toby VMUSB3-B-G-S-xxx series and Toby USB3-UL20276-28-BL-xxM series wire

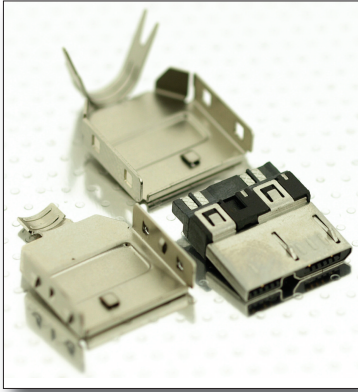

Ordering Information for VMUSB3-B-P-KIT Series

VMUSB3-B-P-KIT

Specification for VMUSB3-B-P-KIT Series

Contact Material:	Phosphor bronze
Contact Plating:	15 micron Gold Plated
Body (Insert):	PBT UL94V-0 Rated Black
Shell Material:	Stainless Steel (Ni 80u" plated)
Rated Current:	1A per contact - DWV - AC500V
Voltage Rating:	30V
Insulation Resistance:	1000 MΩ Max.
Contact Resistance:	50 mΩ min.
Operating Temperature:	-30°C to +85°C