
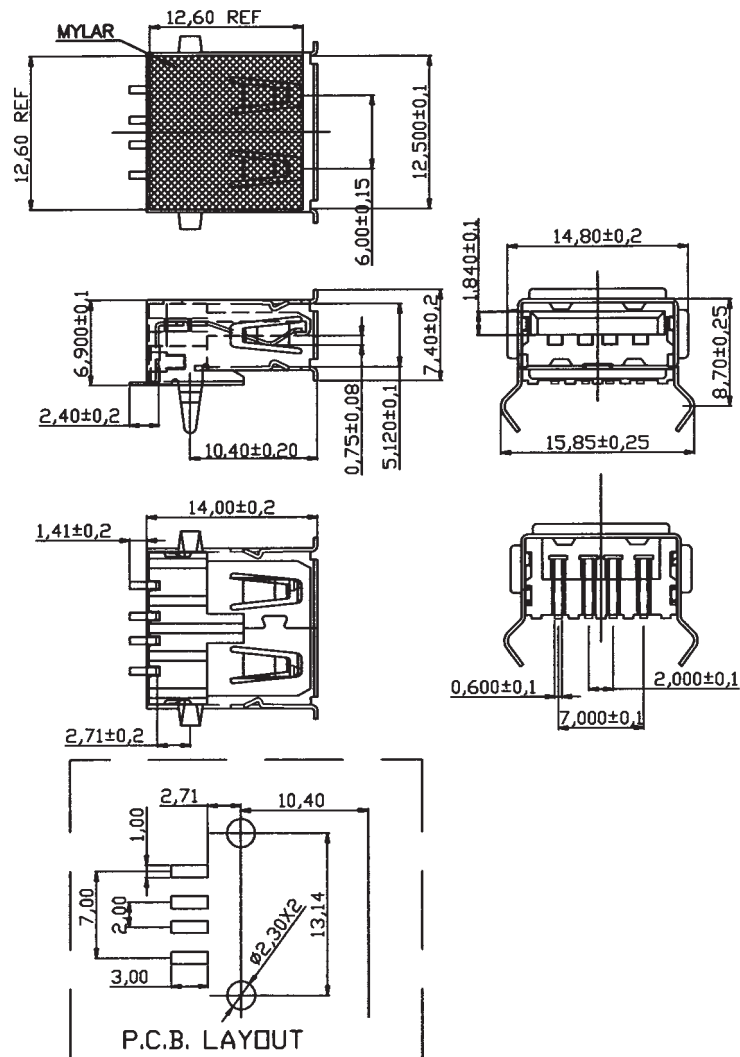


USB A-Type Surface Mount PCB Connector
VUSB2-A-SMT-G

Gold flash plated mating contacts (G)
Black or white insulators (depending on stock)
Meets USB 1.1 & 2.0 specification

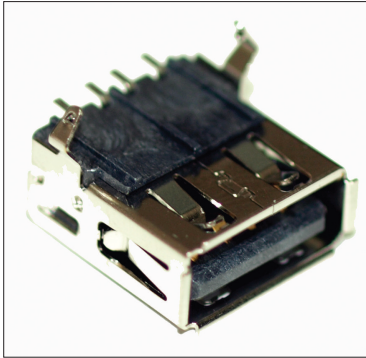

Ordering Information:

VUSB2-A-SMT-G

Specification:

Insulator Material:	LCP/PBT UL94V-0 rated (Black or White)
Contact Material:	Brass t=0.25mm
Shell Material:	Brass/K7 t=0.30mm Nickel plated
Contact Plating:	1u" Gold flash on mating contacts
Solder Tail Plating:	Tin
Current Rating:	1.5A at 250V AC minimum
DWV:	500V AC 1 minute without breakdown
Contact Resistance:	30mΩ Max./50mΩ Max. (pre/post life test)
Insulation Resistance:	1000MΩ min.
Mating/Unmating Force:	35 Newtons / 10 Newtons.
Operating Temperature:	-55°C to +105°C
Solderability:	5 Seconds ±0.5 @ 245°C±5.0 (Max)