
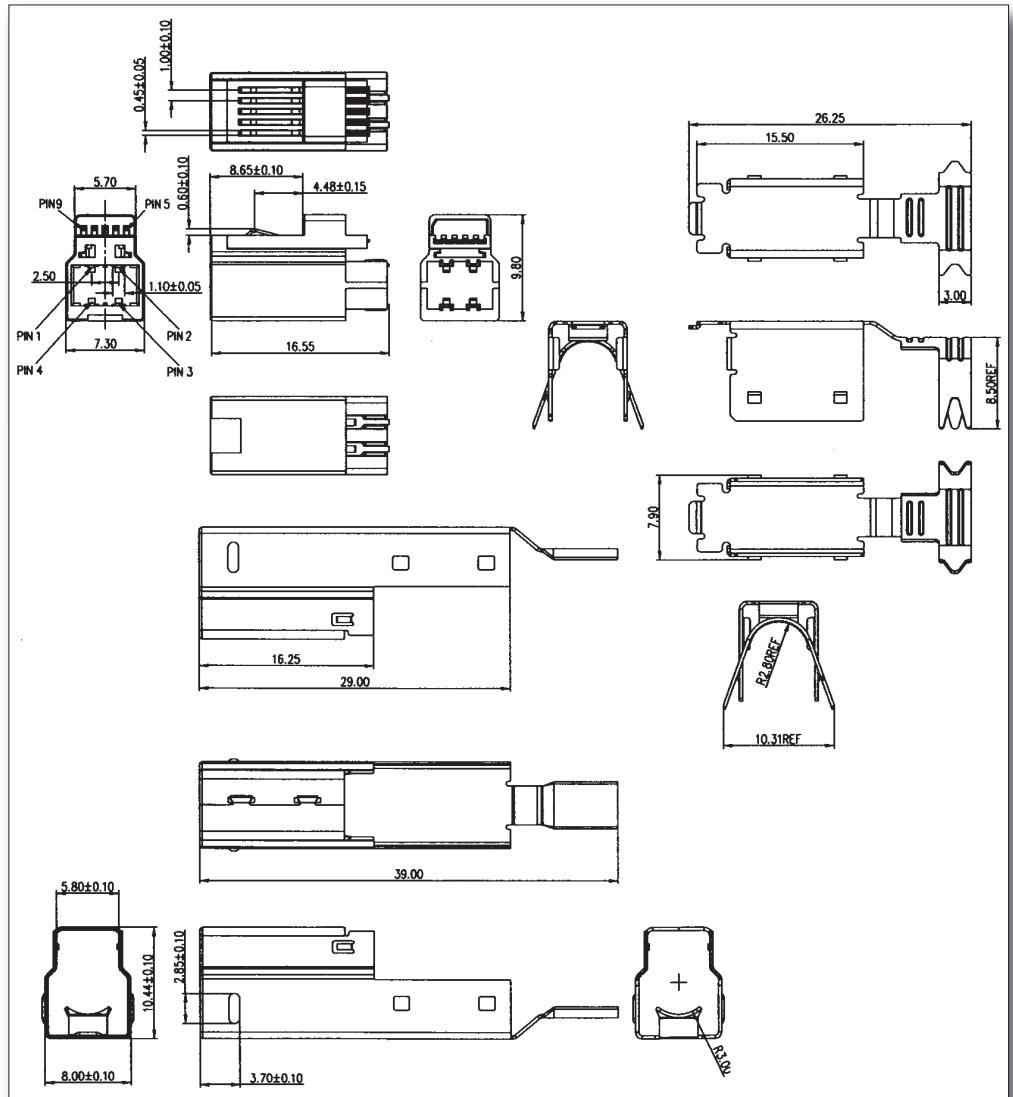


USB3.0 Cable Mount Male B-Type Plug Kit VUSB3-B-P-KIT Series

Blue plastic inserts with gold (15 micron) plated contacts
 SPCC (Stainless Steel) shell supplied (2 part)
 Mates with Toby VUSB3 B-Type PCB Connectors & USB3-UL20276-28-BL-xxM Wire

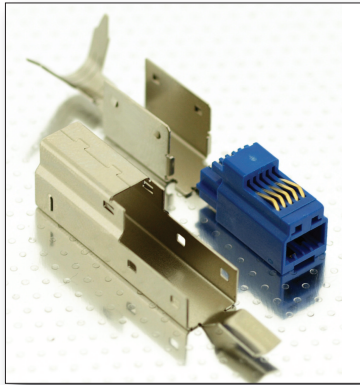

Ordering Information for VUSB3-B-P-KIT Series

VUSB3-B-P-KIT

Specification for VUSB3-B-P-KIT Series

Contact Material:	Copper Alloy
Contact Plating:	15 micron Gold Plated
Body (Insert):	PBT UL94V-0 Rated Blue
Shell Material:	SPCC (Ni 80u" plated)
Rated Current:	1.8A Pins 1 & 4 0.25A Others
DWV -	AC100V
Voltage Rating:	30V
Insulation Resistance:	100 MΩ Max.
Contact Resistance:	30 mΩ min.
Operating Temperature:	-55°C to +85°C
Mating/Unmating Force:	35N max. / 10N min.