



RECOMMENDED PADS LAYOUT
<TOP VIEW>

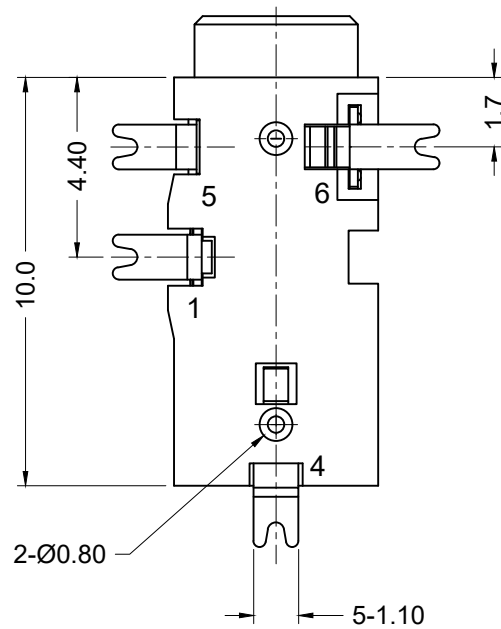

Material and Finish

Housing: High Temp Plastic
Terminals: Copper Alloy,
Silver Plated

Electrical Characteristics

Contact Resistance:
Before Test: 50 milliohms max.
After Durability Test:
100 milliohms max.

Rated Voltage: 16V DC

Rated Current: 0.3A

Insulation Resistance:
100 Megohms min.
at 500V DC

Dielectric Strength:
500V AC RMS for 1 minute

Operating Temp:
-25°C to +85°C

Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise



REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A0	1/11/08	New Drawing	WILL H.	H. MA	WILL H.	1/10/08
A1	2/7/08	Release Drawing	H. MA	N/A		
A2	09/14/09	ECO #09-070	S. Vien	H. MA		
A3	08/14/18	Update Address	D. Shehan	N/A		

STX-25406-4N-TR

Ø2.5mm Earphone Jack, SMT
4 Pins, RoHS Compliant

