
NAVIGATE THE CATALOG BY SECTION

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22

SKINTOP® Strain Relief Cord Connectors

SKINTOP® MS/MSR


Liquid Tight Metallic Strain Relief Cable Gland with PG Threads



SKINTOP® MS/ MSR is a superior quality, liquid tight, metallic cable gland intended for applications where ruggedness and durability are required. These cable glands are suitable for a wide range of applications from manufacturing machinery to measurement and control equipment, including automation and robotics.

Application Advantage:

- Suitable for use in areas with high demands on special mechanical and chemical stability
 - The heavy duty SKINTOP® design provides great pullout strength and very reliable strain relief
 - Extended temperature range due to the nickel-plated brass body
 - Generous high quality neoprene bushing and perbunan o-ring provide a liquid tight and dust proof, hermetic seal
-

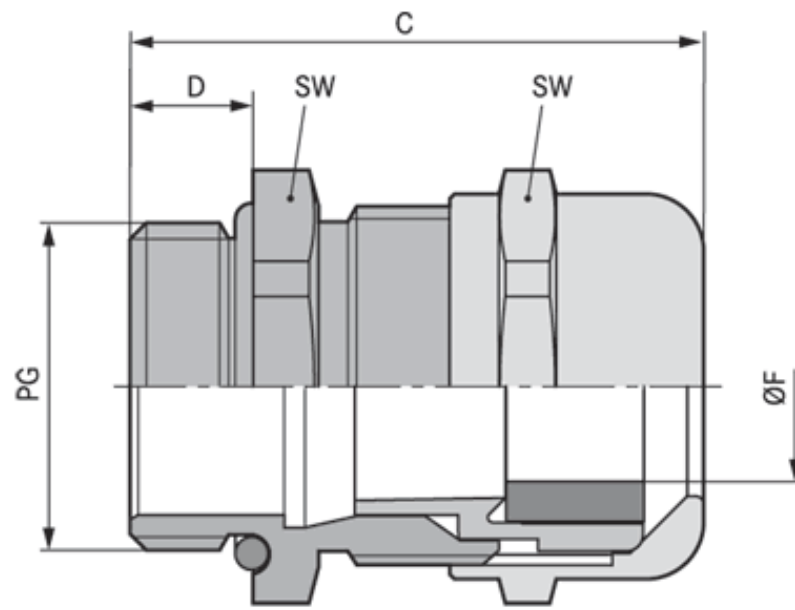

TECHNICAL DATA:

🔩 Materials:

Body: **Nickel-Plated Brass**
Insert: **Polyamide**
Bushing: **CR**
O-Ring: **Perbunan (NBR)**

🛡️ Protection Seal:

IP 68, 5 Bar
Exceeds NEMA 6/6P Pressure rating

🌡️ Temperature Range:

-30°C to +100°C

🔑 Locknuts:

[See SM Locknuts](#)

Part	Thread	Clamping Range	SW Wrenching Flats	C Overall	D Thread	Standard Pack
Number	Type	ØF inches	inches	Length inches	Length inches	Size
SKINTOP® MS						
52015700	PG-7	.079 - .256	.551	0.984	0.197	100
52015710	PG-9	.118 - .315	.669	1.142	0.236	100
52015720	PG-11	.157 - .394	.787	1.260	0.236	50
52015730	PG-13	.197 - .472	.866	1.339	0.256	50
52015740	PG-16	.315 - .551	.945	1.378	0.256	50
52015750	PG-21	.433 - .709	1.181	1.575	0.276	25
52015760	PG-29	.630 - .984	1.575	1.890	0.315	25
52015765	PG-36	.748 - 1.260	1.969	2.441	0.591	10
52015766	PG-42	1.102 - 1.496	2.244	2.441	0.591	5
52015767	PG-48	1.339 - 1.732	2.520	2.441	0.591	5
SKINTOP® MSR with Reducer Bushing						
52015770	PG-7	.079 - .197	.551	0.984	0.197	100
52015780	PG-9	.079 - .236	.669	1.142	0.236	100
52015790	PG-11	.118 - .276	.787	1.260	0.236	50
52015800	PG-13	.157 - .354	.866	1.339	0.256	50
52015810	PG-16	.236 - .512	.945	1.378	0.256	50
52015820	PG-21	.315 - .630	1.181	1.575	0.276	25
52015830	PG-29	.413 - .787	1.575	1.890	0.315	25
52015831	PG-36	.748 - 1.024	1.969	2.441	0.591	10
52015832	PG-42	.945 - 1.220	2.244	2.441	0.591	5
52015833	PG-48	1.102 - 1.378	2.520	2.441	0.591	5