


SKINTOP® SL/ SLR

Liquid Tight Non-Metallic Strain Relief Connector with PG Threads



SKINTOP® SL/SLR is a durable, liquid tight, easy to assemble strain relief cable connector with a PG thread, that is universally suited for all types of machinery &

equipment, including automation, motion control and robotics. The heavy duty SKINTOP® design provides great pullout strength and very reliable strain relief.

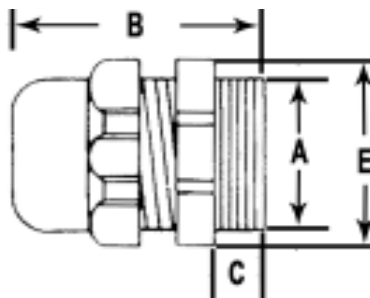

Technical Data:

Materials:	Body: Polyamide	Color: Black (RAL 9005)
	Bushing: Neoprene	Gray (RAL 7001)
		*Lt Gray (RAL 7035) available upon request
Locknuts: Included		Protection: 70 PSI
		Seal: IP 68, 5 Bar
		(Exceeds NEMA 6/ 6P Pressure rating)
*Halogen Free Bushings are available upon request, See SKINTOP® EPDM, Page 569		Temperature range: -20° C to +80° C

SKINTOP® SL: PG Liquid Tight Non-Metallic Strain Relief Connector

Black	Part Number Gray	Thread Type & Size	UL Status	Diameter Range inches	A Thread Dimensions inches	B Maximum Overall Length inches	C Thread Length inches	D Wrenching Nut Thickness inches	E Wrenching Flats inches	Standard Pack Size	Weight 100 pcs. lbs.
S2107	S1107	PG-7	R	.098 - .256	.492	1.260	.315	.203	.591	100	1.00
S2109	S1109	PG-9	R	.138 - .315	.599	1.417	.315	.218	.748	100	1.50
S2111	S1111	PG-11	R	.157 - .394	.733	1.496	.315	.218	.866	100	2.00
S2113	S1113	PG-13	L	.236 - .472	.804	1.614	.354	.218	.945	100	2.50
S2116	S1116	PG-16	L	.354 - .551	.886	1.732	.394	.234	1.063	50	3.00
S2121	S1121	PG-21	L	.512 - .709	1.115	1.929	.433	.250	1.299	50	5.00
S2129	S1129	PG-29	R	.551 - .984	1.457	2.205	.433	.297	1.654	25	8.50
S2136	S1136	PG-36	L	.945 - 1.260	1.850	2.598	.512	.315	2.087	10	17.50
S2142	S1142	PG-42	R	1.378 - 1.496	2.126	2.677	.512	.360	2.362	5	24.00
S2148	S1148	PG-48	L	1.535 - 1.732	2.335	2.717	.551	.360	2.559	5	29.00

SKINTOP® SLR: PG Liquid Tight Non-Metallic Strain Relief Connector with Reducer Bushing

Black	Part Number Gray	Thread Type & Size	UL Status	Diameter Range inches	A Thread Dimensions inches	B Maximum Overall Length inches	C Thread Length inches	D Wrenching Nut Thickness inches	E Wrenching Flats inches	Standard Pack Size	Weight 100 pcs. lbs.
S2207	S1207	PG-7	R	.059 - .197	.492	1.260	.315	.203	.591	100	1.00
S2209	S1209	PG-9	R	.079 - .236	.599	1.417	.315	.218	.748	100	1.50
S2211	S1211	PG-11	R	.079 - .276	.733	1.496	.315	.218	.866	100	2.00
S2213	S1213	PG-13	L	.157 - .354	.804	1.614	.354	.218	.945	100	2.50
S2216	S1216	PG-16	L	.236 - .472	.886	1.732	.394	.234	1.063	50	3.00
S2221	S1221	PG-21	L	.354 - .630	1.115	1.929	.433	.250	1.299	50	5.00
S2229	S1229	PG-29	R	.433 - .787	1.457	2.205	.433	.297	1.654	25	8.50
S2236	S1236	PG-36	L	.669 - 1.024	1.850	2.598	.512	.315	2.087	10	17.50
S2242	S1242	PG-42	R	.866 - 1.220	2.126	2.677	.512	.360	2.362	5	24.00
S2248	S1248	PG-48	L	1.024 - 1.378	2.335	2.717	.551	.360	2.559	5	29.00

NOTES:

- Orders of 2000 pieces or more per item will be bulk packaged unless otherwise requested.
- UL Status: R = Recognized; L = Listed