

**Sales Outline Drawing**

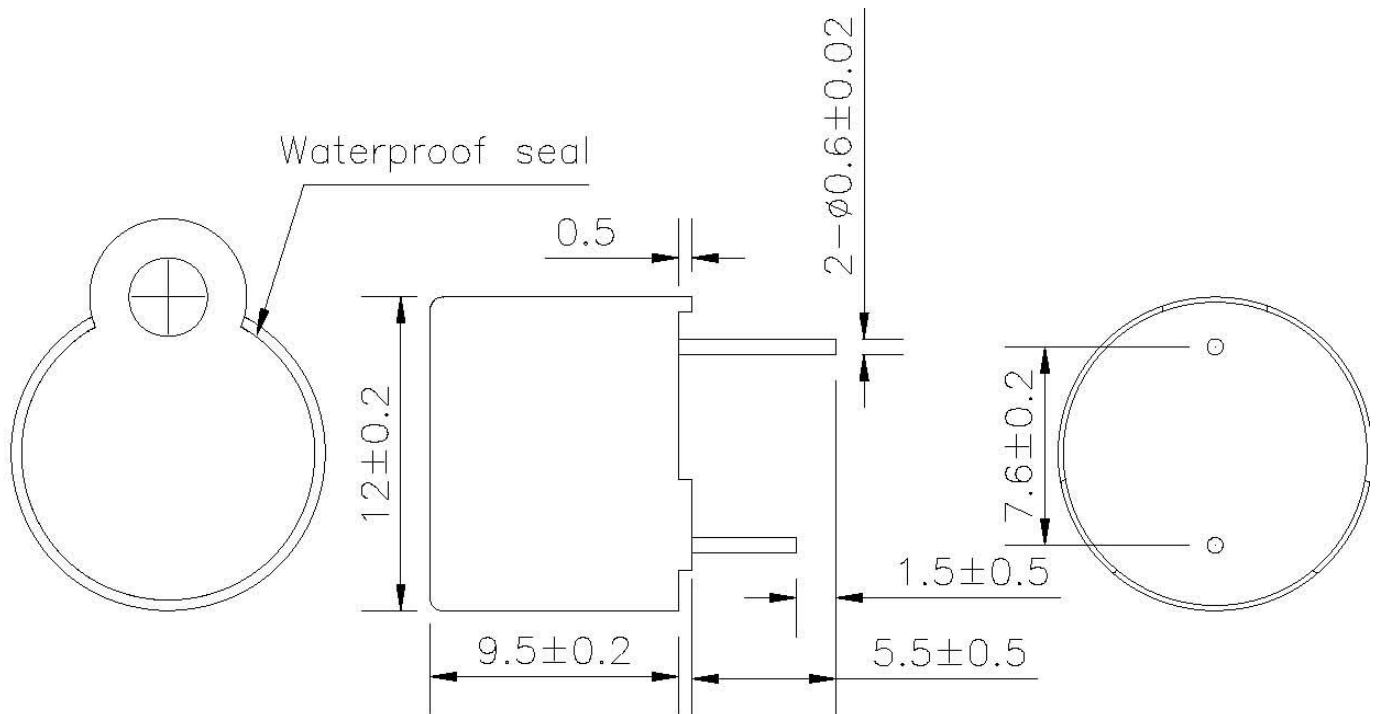
**May not be suitable for all medical and aerospace applications.**

**Specifications: Contact Mallory Sonalert to discuss your application.**

Oscillation Frequency (Hz)	2300 ± 400
Operating Voltage (Vdc)	4.0 ~ 7.0
Rated Voltage (Vdc)	5
Current Consumption Max. (mA)	30 at Rated Voltage
Sound Pressure Level (dB/min)	85 at 10cm at Rated Voltage
Tone/Pulse Rate	Constant
Operating Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-30 ~ +80
Lead Pin	Tin Plated Brass
Housing	PPO plastic resin (Color: Black)
Weight (Grams)	1.8
Condition by wave soldering (°C)	245 ± 5 / 3 ± 0.5 sec
Condition by hand soldering (°C)	350 ± 20 / within 5 sec
Options	For other options contact factory

**Dimensions:** (units: mm)

**ROHS Compliant**

**Packaging:**

Parts are supplied in tube (40 per tube).