

Sales Outline Drawing

Specifications:

Sensitivity Range -42 ± 3 dB $R_L = 2.2$ k Ω $V_{cc} = 3.0$ v
(1 kHz 0 dB = 1 v/Pa)

Impedance Max. 2.2k Ω 1 kHz ($R_L = 2.2$ k Ω)

Frequency 20 - 16000 Hz

Current Consumption Max 0.5 mA

Operating Voltage Range 1.1 - 10 V

Max SPL (dB) 115 dB

S/N Ratio More than 60 dB

Sensitivity Reduction 3.0 -2.0V Variation less than 3 dB

Storage Condition $-40 \sim +70^\circ\text{C}$; R.H. < 90%

Operating Condition $-20 \sim +60^\circ\text{C}$; R.H. < 90%


Weight (g) 0.6

Options For other options contact factory


Part has been replaced by PMOF-9745W-42DQ.

Dimensions: (units: mm)


Filter

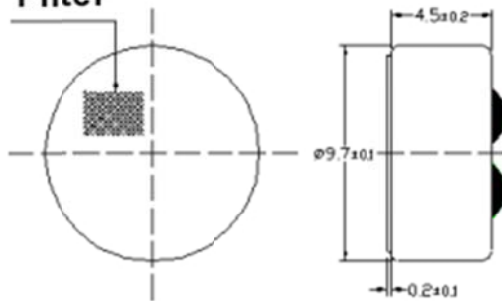

ROHS Compliant

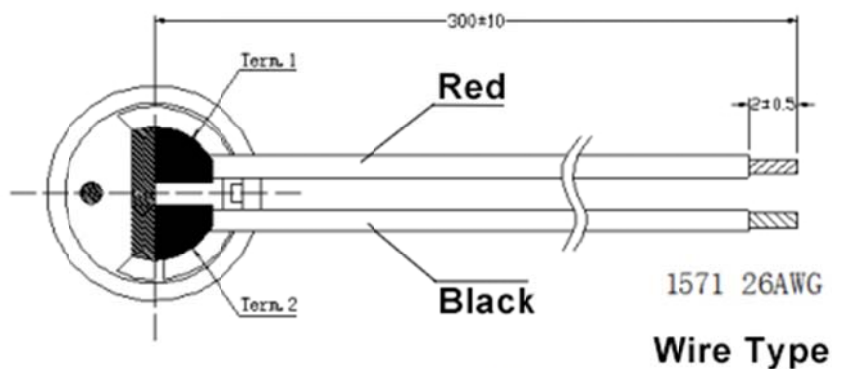

Schematic Diagram:

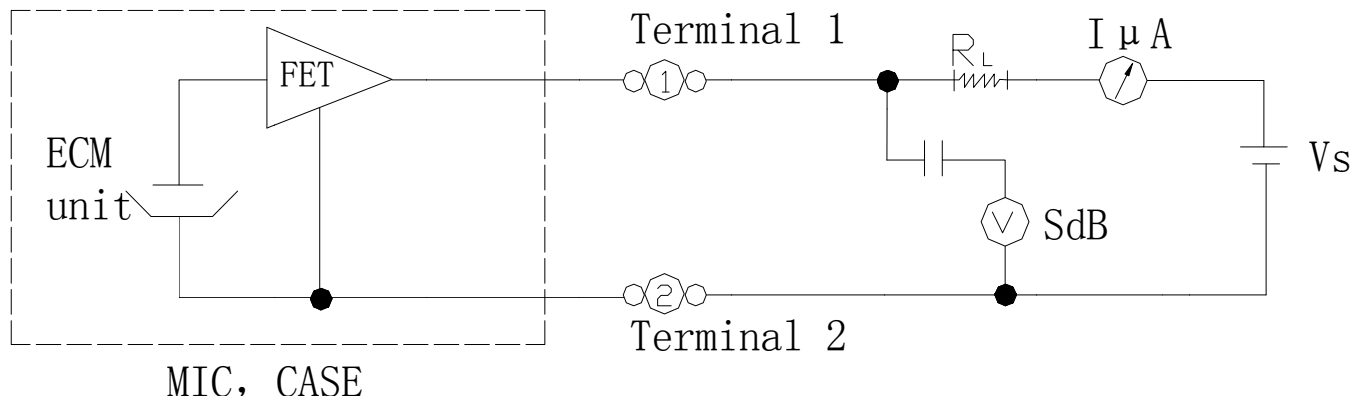

Packaging:

Bulk pack in quantities of 50pcs.