

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [51-26-0000](#)
Status: **Active**
Overview: [LFH™](#)
Description: 1.90mm Pitch LFH™ Matrix 75 Shielded Receptacle, 96 Circuits, Right Angle, Bright Nickel (Ni) Finish, 2.34mm PC Tail Length

Documents:

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

Agency Certification


CSA LR19980
 UL E29179

General

Product Family I/O Connectors
 Series [70660](#)
 Application Board-to-Board, Wire-to-Board
 Component Type Receptacle
 Overview [LFH™](#)
 Product Name LFH™
 Type N/A

Physical

Boot Color N/A
 Circuits (Loaded) 96
 Circuits (maximum) 96
 Circuits Detail 96
 Color - Resin Black
 Flammability 94V-0
 Gender Receptacle
 Keying to Mating Part None
 Lock to Mating Part Yes
 Material - Metal Beryllium Copper
 Material - Plating Mating Gold
 Material - Plating Termination Tin-Lead
 Material - Resin High Temperature Thermoplastic
 Number of Rows 4
 Orientation Right Angle
 PC Tail Length 2.34mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.57mm
 Packaging Type Tube
 Panel Mount Yes
 Pitch - Mating Interface 1.90mm
 Pitch - Termination Interface 1.90mm
 Plating min - Mating 0.762µm
 Plating min - Termination 2.540µm
 Polarized to Mating Part Yes
 Polarized to PCB No
 Ports 1
 Surface Mount Compatible (SMC) Yes
 Temperature Range - Operating -20°C to +80°C
 Termination Interface: Style Through Hole
 Waterproof / Dustproof No

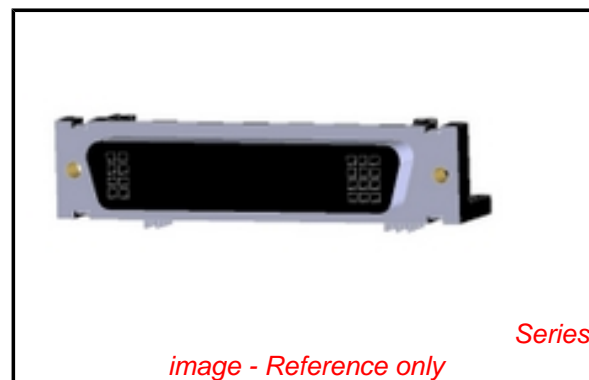

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Low-Halogen Status

Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[70660Series](#)

Mates With

[70665](#) , [71995](#)

Use With

[71628](#) Guide Pin, [Guide Sleeve 71629](#) or [71771](#), [70982](#) Hex Screw Kit

Wire Size AWG	N/A
Electrical	
Current - Maximum per Contact	1A
Grounding to Panel	None
Shield Type	Full Shield
Shielded	Yes
Voltage - Maximum	40V AC (RMS)

Solder Process Data

Duration at Max. Process Temperature (seconds)	40
Lead-free Process Capability	SMC & Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	245

Material Info

Old Part Number	706600001
-----------------	-----------

Reference - Drawing Numbers

Sales Drawing	SDA-70660-0001
---------------	----------------

This document was generated on 03/30/2012

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION