PART NO.	ENG. NO.
02-09-1142	1433-A(P901)
02-09-1144	1433-A(P901)L
02-09-5146	1433-A(P550)
02-09-5147	1433-A(P550)L
02-09-5165	1433-A(P563)



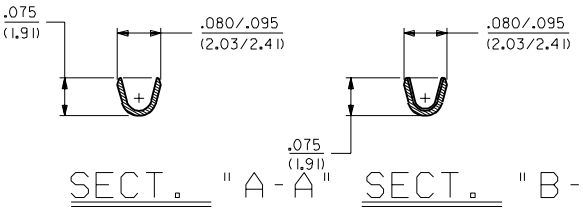

SECT. "A-A" SECT. "B-B"

LEGEND

1433-A(****)*

- FORM: BLANK=CHAIN, L=LOOSE
- FINISH CODE
- P=PREPLATE, BLANK=POSTPLATE

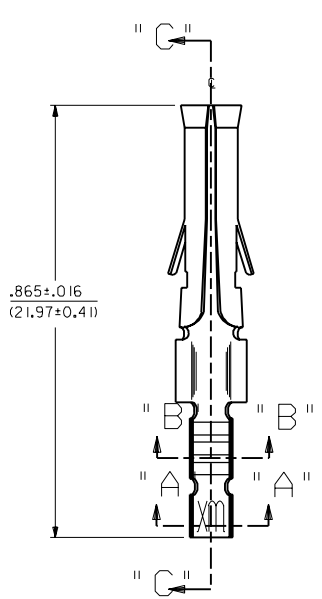

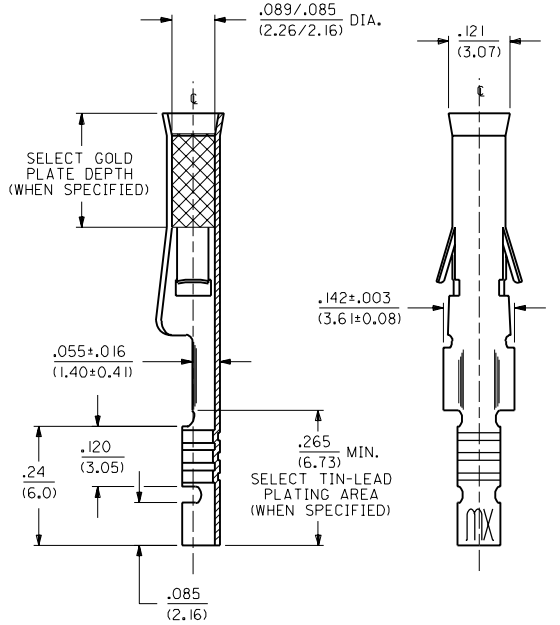

SECT. "C-C"

NOTES:

1. TERMINAL FOR USE WITH .093/(2.36) SERIES HOUSINGS AND WILL ACCEPT 24 THRU 30 AWG WIRE.
2. INSERTION FORCE: 3.5 LBS. MAX. WHEN TERMINAL IS INSERTED INTO AN .093 SERIES HOUSING.
3. CONTACT RETENTION: 20 LBS. MIN.
4. THIS PART CONFORMS TO PROD. SPEC. 02-09.

FINISH CODES:

- 901 HOT TIN DIP .000020/(0.00051) MIN.
- 903 HOT TIN-LEAD DIP .000050/(0.00127) MIN.
- 550 SELECT GOLD PLATE .000015/(0.00038) MIN. IN CONTACT AREA, OVER .000030/(0.00076) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.
- 563 SELECT GOLD PLATE .000030/(0.00076) MIN. IN CONTACT AREA, SELECT TIN-LEAD PLATING .000100/(0.00254) MIN. IN CRIMP AREA OVER .000050/(0.00127) NICKEL OVERALL.

MATERIAL:
CARTRIDGE BRASS, ALLOY #C26000, .010/(0.25) THICK, SPRING TEMPER

AA	REVISE PER ECR U5 0799 GC 2/13/95	RW
Z	FINAL RELEASE ECR U1 0454 GC 2/20/91	RW

0 0

CRIMP TERMINAL, FEMALE
.093/(2.36) DIA. FOR
24 THRU 30 AWG WIRE

.010	---
.014	0.25
---	0.36

1 2 20 91

SEE CHART SD-1433-•

GC GWF RW 6 1 S1433X1 DGN CP

1433