
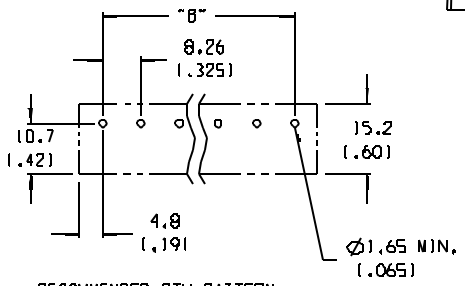

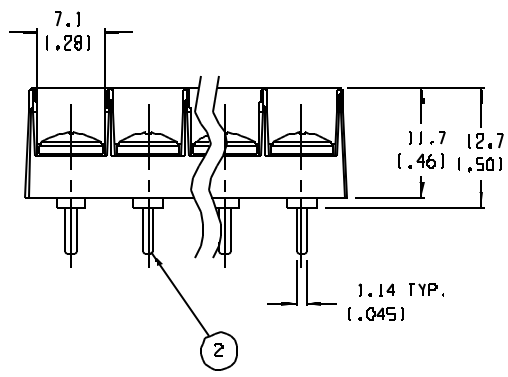
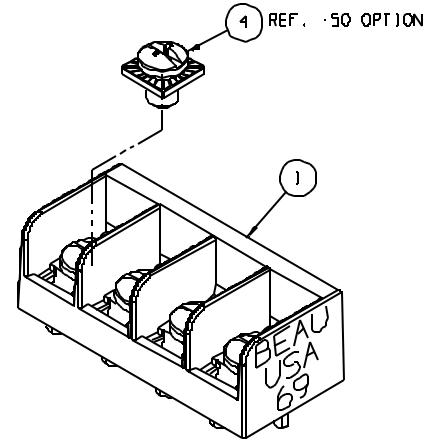


MATERIAL NO. (STD)	MATERIAL NO. (-50 OPTION)	# OF CIRCUITS "XX"	"A"	"B"
386906601	386907801	1	9.7 (.381)	-
386906602	386907802	2	17.9 (.711)	8.3 (.331)
386906603	386907803	3	26.2 (1.031)	16.5 (.651)
386906604	386907804	4	34.4 (1.361)	24.8 (.981)
386906605	386907805	5	42.7 (1.681)	33.0 (1.301)
386906606	386907806	6	50.9 (2.011)	41.3 (1.631)
386906607	386907807	7	59.2 (2.331)	49.5 (1.951)
386906608	386907808	8	67.4 (2.661)	57.8 (2.281)
386906609	386907809	9	75.7 (2.981)	66.0 (2.601)
386906610	386907810	10	83.9 (3.311)	74.3 (2.931)
386906611	386907811	11	92.2 (3.631)	82.6 (3.251)
386906612	386907812	12	100.5 (3.961)	90.8 (3.581)
386906613	386907813	13	108.7 (4.281)	99.1 (3.901)
386906614	386907814	14	117.0 (4.611)	107.3 (4.231)
386906615	386907815	15	125.2 (4.931)	115.6 (4.551)
386906616	386907816	16	133.5 (5.261)	123.8 (4.881)
386906617	386907817	17	141.7 (5.581)	132.1 (5.201)
386906618	386907818	18	150.0 (5.911)	140.3 (5.531)
386906619	386907819	19	158.2 (6.231)	148.6 (5.851)
386906620	386907820	20	166.5 (6.561)	156.8 (6.181)
386906621	386907821	21	174.8 (6.881)	165.1 (6.501)
386906622	386907822	22	183.0 (7.211)	173.4 (6.831)
386906623	386907823	23	191.3 (7.531)	181.6 (7.151)
386906624	386907824	24	199.5 (7.861)	189.9 (7.481)
386906625	386907825	25	207.8 (8.181)	198.1 (7.801)
386906626	386907826	26	216.0 (8.511)	206.4 (8.131)
386906627	386907827	27	224.3 (8.831)	214.6 (8.451)
386906628	386907828	28	232.5 (9.161)	222.9 (8.781)
386906629	386907829	29	240.8 (9.481)	231.1 (9.101)
386906630	386907830	30	249.0 (9.811)	239.4 (9.431)
386906631	386907831	31	257.3 (10.131)	247.7 (9.751)
386906632	386907832	32	265.6 (10.461)	255.9 (10.081)

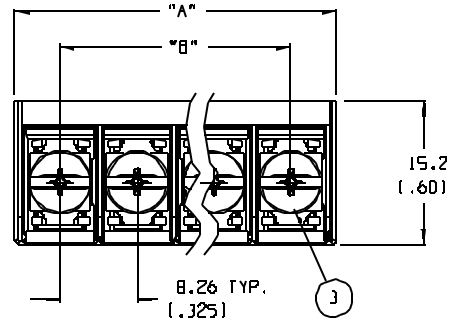

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. PRODUCT SPECIFICATION: NOT REQUIRED
 4. PACKAGING: NOT REQUIRED
 5. MATES WITH: NONE
 6. "XX" REFERS TO THE QUANTITY OF CIRCUITS.

RECOMMENDED PTH PATTERN
SCALE 1:1

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
4	XX	SCREW, #6-32, PAN HD. W/ SO. WASHER, -50 OPT	STEEL	ZN, CLEAR CHROMATE
3	XX	SCREW, #6-32, PAN HEAD	BRASS	NICKEL PLATE
2	XX	TERMINAL, PC	BRASS	TIN PLATE
1	1	INSULATOR	THERMOPLASTIC	BLACK

REP. NO. A	RELEASED	CLY
DRWN: CHY	CHK: APPR:	DESCRIPTION
REV		MAJOR
		CRITICAL
		SPECIAL

GENERAL TOLERANCES UNLESS SPECIFIED	
MM	INCH
4 PLACES	±.0015
3 PLACES	±.005
2 PLACES	±.01
1 PLACE	±.3
ANGULAR: ±2°	

SCALE: 2:1	DESIGN UNITS: <input type="checkbox"/> MM <input checked="" type="checkbox"/> INCH
THIRD ANGLE PROJECTION	
DRWN BY & DATE: C. YORK 04-05-04	
CHECKED BY & DATE:	
APPROVED BY & DATE:	
CAD FILE NAME: 695XX-C	

PROJECT NO.:	-	-
DIMENSIONS:	MM <input checked="" type="checkbox"/> INCH <input type="checkbox"/>	INCH <input type="checkbox"/> MM <input type="checkbox"/>
SHEET NO. 1 OF 1	REV	REVISE ON CAD ONLY
TITLE: SR BTS, CS, PC ASSY		
MOLEX INCORPORATED		
MATERIAL NO. SEE CHART	DRAWING NO. SD-38690-001	SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		