



SECTION X-X  
(奇数極断面図)  
(ODD CKT.)

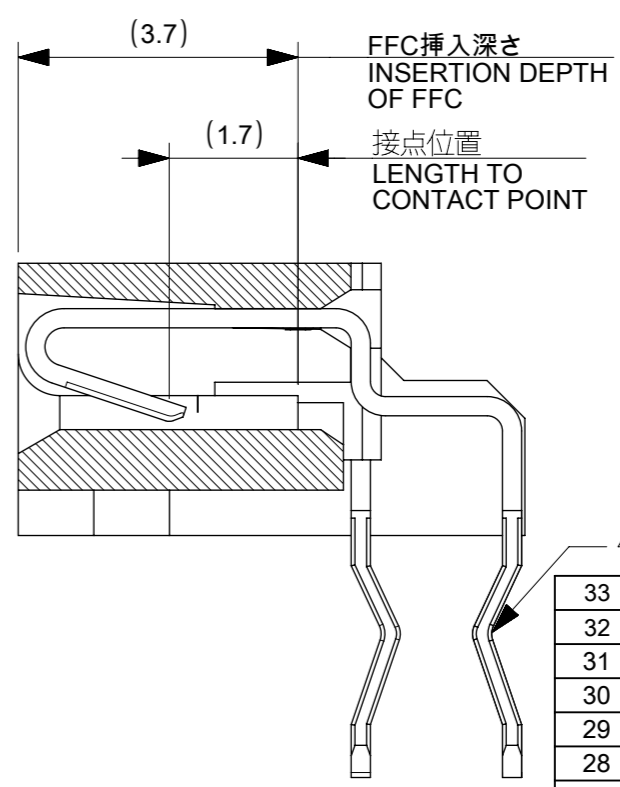

SECTION Y-Y  
(偶数極断面図)  
(EVEN CKT.)

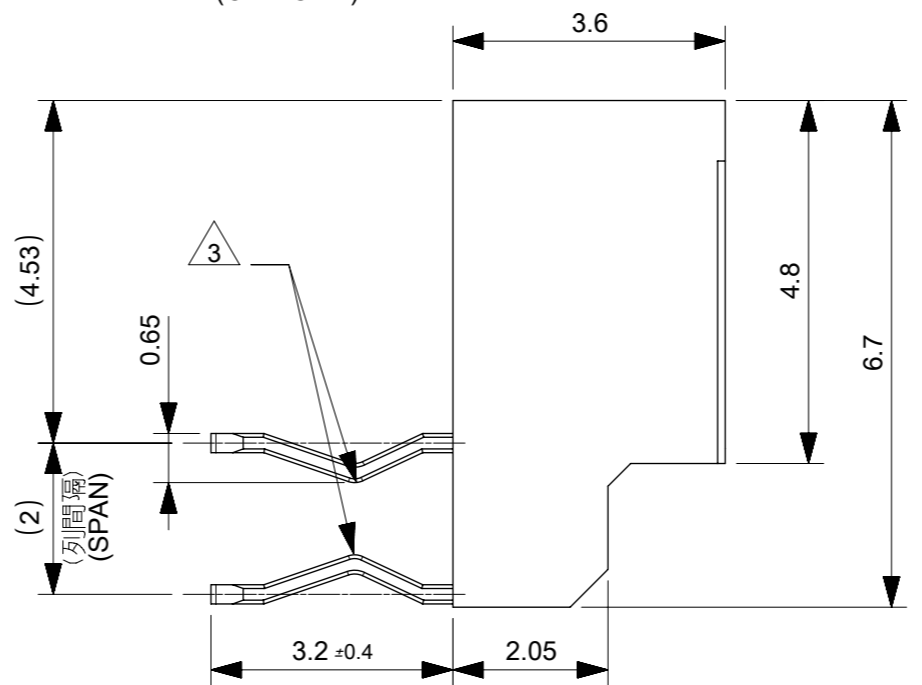

無鉛  
LEAD FREE

33	31.05	29	528073010	30
32	30.05	28	528072910	29
31	29.05	27	528072810	28
30	28.05	26	528072710	27
29	27.05	25	528072610	26
28	26.05	24	528072510	25
27	25.05	23	528072410	24
26	24.05	22	528072310	23
25	23.05	21	528072210	22
24	22.05	20	528072110	21
23	21.05	19	528072010	20
22	20.05	18	528071910	19
21	19.05	17	528071810	18
20	18.05	16	528071710	17
19	17.05	15	528071610	16
18	16.05	14	528071510	15
17	15.05	13	528071410	14
16	14.05	12	528071310	13
15	13.05	11	528071210	12
14	12.05	10	528071110	11
13	11.05	9	528071010	10
12	10.05	8	528070910	9
11	9.05	7	528070810	8
10	8.05	6	528070710	7
9	7.05	5	528070610	6
8	6.05	4	528070510	5
7	5.05	3	528070410	4
6	4.05	2	528070310	3
C	B	A	ENG. NO.	極数 CIRCUIT


注記 NOTES

- ① 回路番号1を基準に奇数番目の極におけるソルダーテール。  
ODD NUMBER SOLDER TAIL FROM THE CKT. NO. 1.
- ② 回路番号1を基準に偶数番目の極におけるソルダーテール。  
EVEN NUMBER SOLDER TAIL FROM THE CKT. NO. 1.
- ③ キンクはソルダーテール全極にもうける。  
SOLDER TAIL KINK SHALL BE PROVIDED ON ALL TAILS.
- ④ 偶数極に適用。  
APPLY FOR EVEN CKT..


材料  
MATERIAL  
ハウジング : PPS UL 94V-0  
ハウジング : PPS UL 94V-0  
ターミナル : りん青銅 錫メッキ t=0.25  
TERMINAL : PHOS-BRO., TIN-PLATED

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 108819 DRWN: GB CHK'D: KTAKAHASHI APPR: TKUSUHARA01	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE		
	ANGULAR TOL ± 3.0 °		MM	10:1		
	4 PLACES ± 0.2	3 PLACES ± 0.2	DRWN BY	DATE		
	2 PLACES ± 0.25	1 PLACE ± 0.3	GB	2016/01/12		
0 PLACES ± 0.3	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		CHK'D BY	DATE	PRODUCT CUSTOMER DRAWING	
		KTAKAHASHI	2016/09/28	SERIES		
		APPR BY	DATE	TKUSUHARA01	2016/09/29	MATERIAL NUMBER
		DRAWING SIZE		THIRD ANGLE PROJECTION	SEE CHART	
		A3			CUSTOMER	
						GENERAL
				DOCUMENT NUMBER		DOC TYPE
				528071000		PSD
				DOC PART		DOC PART
				000		DOC PART
				SHEET NUMBER		SHEET NUMBER
				1 OF 2		1 OF 2

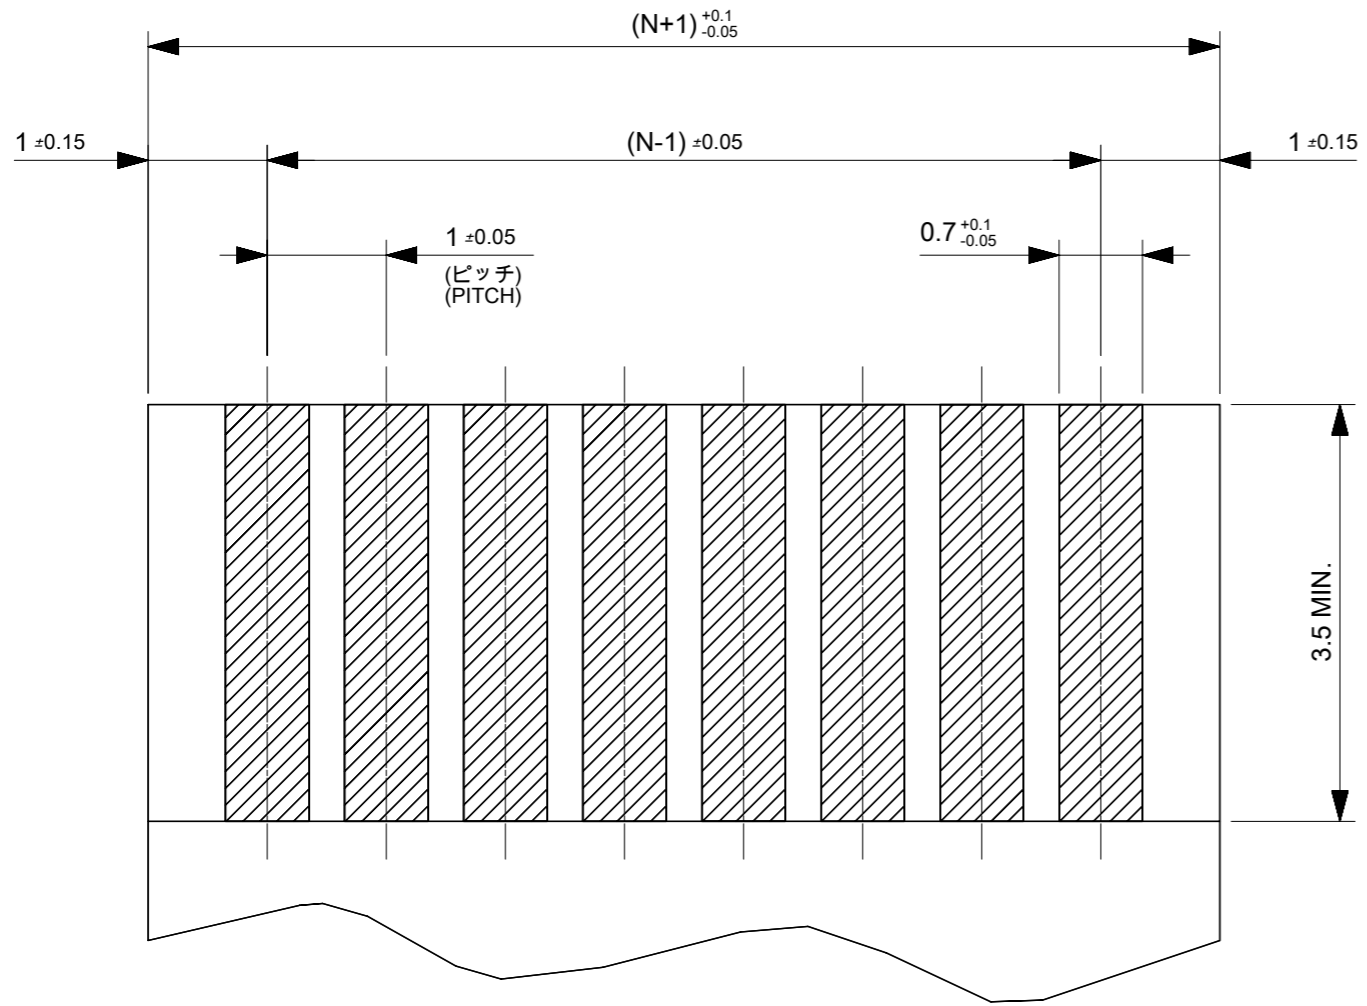

(仕上がり厚さ  $0.3^{+0.03}$ )  
 THICKNESS  
 適合FPC推奨寸法  
 APPLICABLE FPC  
 RECOMMENDED DIMENSION

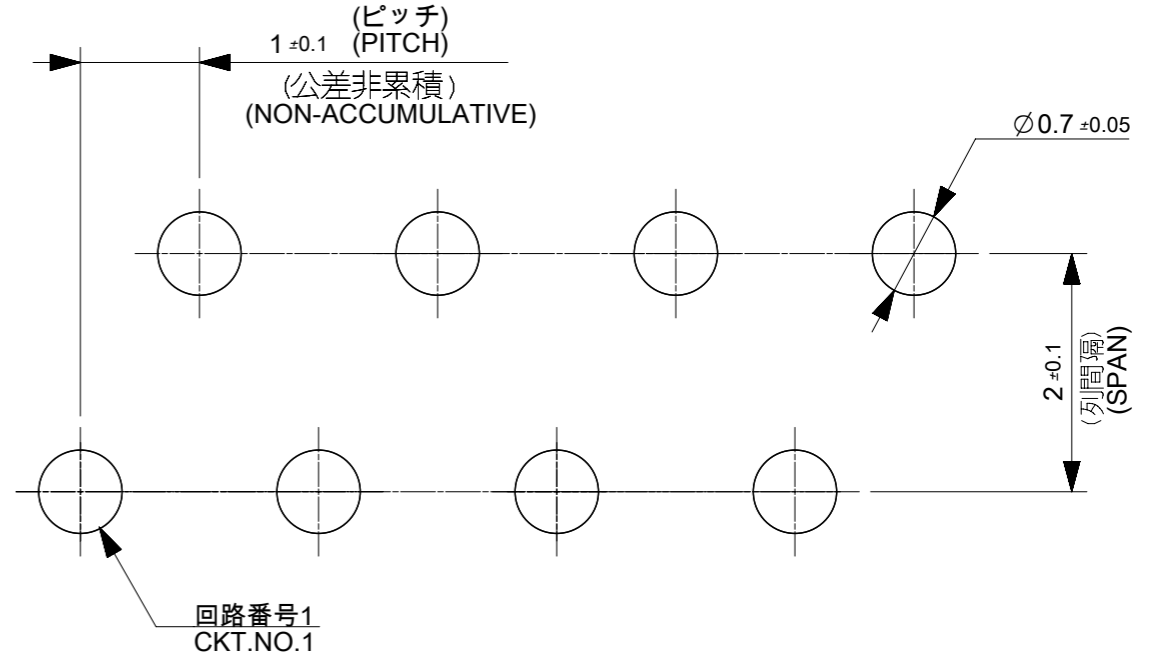

基板取付穴推奨寸法  
 RECOMMENDED P.C. BOARD  
 HOLE DIMENSION  
 (マウント面,  $t=1.6$ )  
 (MOUNTING SIDE,  $t=1.6$ )

無鉛  
 LEAD FREE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 108819 DRWN: GB CHK'D: KTAKAHASHI APPR: TKUSUHARA01	2016/01/12	2016/09/28	2016/09/29	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL $\pm 3.0^\circ$ 4 PLACES $\pm 0.2$ 3 PLACES $\pm 0.2$ 2 PLACES $\pm 0.25$ 1 PLACE $\pm 0.3$ 0 PLACES $\pm 0.3$ DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION UNITS	SCALE			
	MM		10:1						
	DRWN BY	DATE			PRODUCT CUSTOMER DRAWING				
	GB	2016/01/12							
	CHK'D BY	DATE			SERIES	MATERIAL NUMBER	CUSTOMER		
KTAKAHASHI	2016/09/28		52807	SEE CHART	GENERAL				
APPR BY	DATE		DRAWING SIZE	THIRD ANGLE PROJECTION		DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
TKUSUHARA01	2016/09/29		A3			528071000	PSD	000	2 OF 2