


WEEK/YEAR DATE CODE TABLE	
WK	WEEK OF THE YEAR 01 THRU 52 (EXAMPLE: 01= FIRST WEEK OF YEAR 52= LAST WEEK OF YEAR)
YR	19,20,21,,ETC (EXAMPLE: YEAR 2019= 19)


- NOTES:
- THIS LIGHT PIPE ASSEMBLY TO BE USED WITH SERIES 74728, 1X4 CAGES.
 - IT IS RECOMMENDED THAT THE CAGE ASSEMBLY BE PRESSED INTO OR SOLDERED TO THE PCB PRIOR TO ASSEMBLING THE LIGHT PIPE ASSEMBLY.
 - LED'S TO HAVE A MAXIMUM HEIGHT OF 1.4mm AND A MINIMUM HEIGHT OF 0.7mm
 - RECOMMENDED LED'S INCLUDE THE FOLLOWING MANUFACTURES:
 DIALIGHT: 597-77x1-5xx SERIES
 CHICAGO MINIATURE: 7016 SERIES
 KINGBRIGHT: APBL3025 SERIES (BICOLOR)
 APL3015 SERIES (SINGLE COLOR)
 - NO RoHS EXEMPTIONS.
 - DISCOLORATION IS NOT ALLOWED.

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: SEE REVISION TABLE						
	DIMENSION UNITS	SCALE							
▽ = 0	mm	4:1	EC NO: 618645 DRWN: JYEN01 2019/06/06 CHK'D: JCHIANG 2019/06/06 APPR: JCHIANG 2019/06/06 INITIAL REVISION: DRWN: PMAHADEVAPPA 2018/12/18 APPR: RCHEN08 2019/01/15		1X4 SFP LIGHT PIPE COVER ASSEMBLY, LOW PROFILE				
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)				PRODUCT CUSTOMER DRAWING				
▽ = 0	ANGULAR TOL ± 1.0°				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
▽ = 0	4 PLACES ±				747280002		PSD	ASY	B1
▽ = 0	3 PLACES ±				MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
▽ = 0	2 PLACES ± 0.13				747280002				1 OF 5
▽ = 0	1 PLACE ± 0.25		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES		
☒ = 0	0 PLACES ±		D-DRAWING		D-SIZE	74728			
■ = 0									
▽ = 0									

PCB LAYOUT FOR BELLY TO BELLY MOUNTING

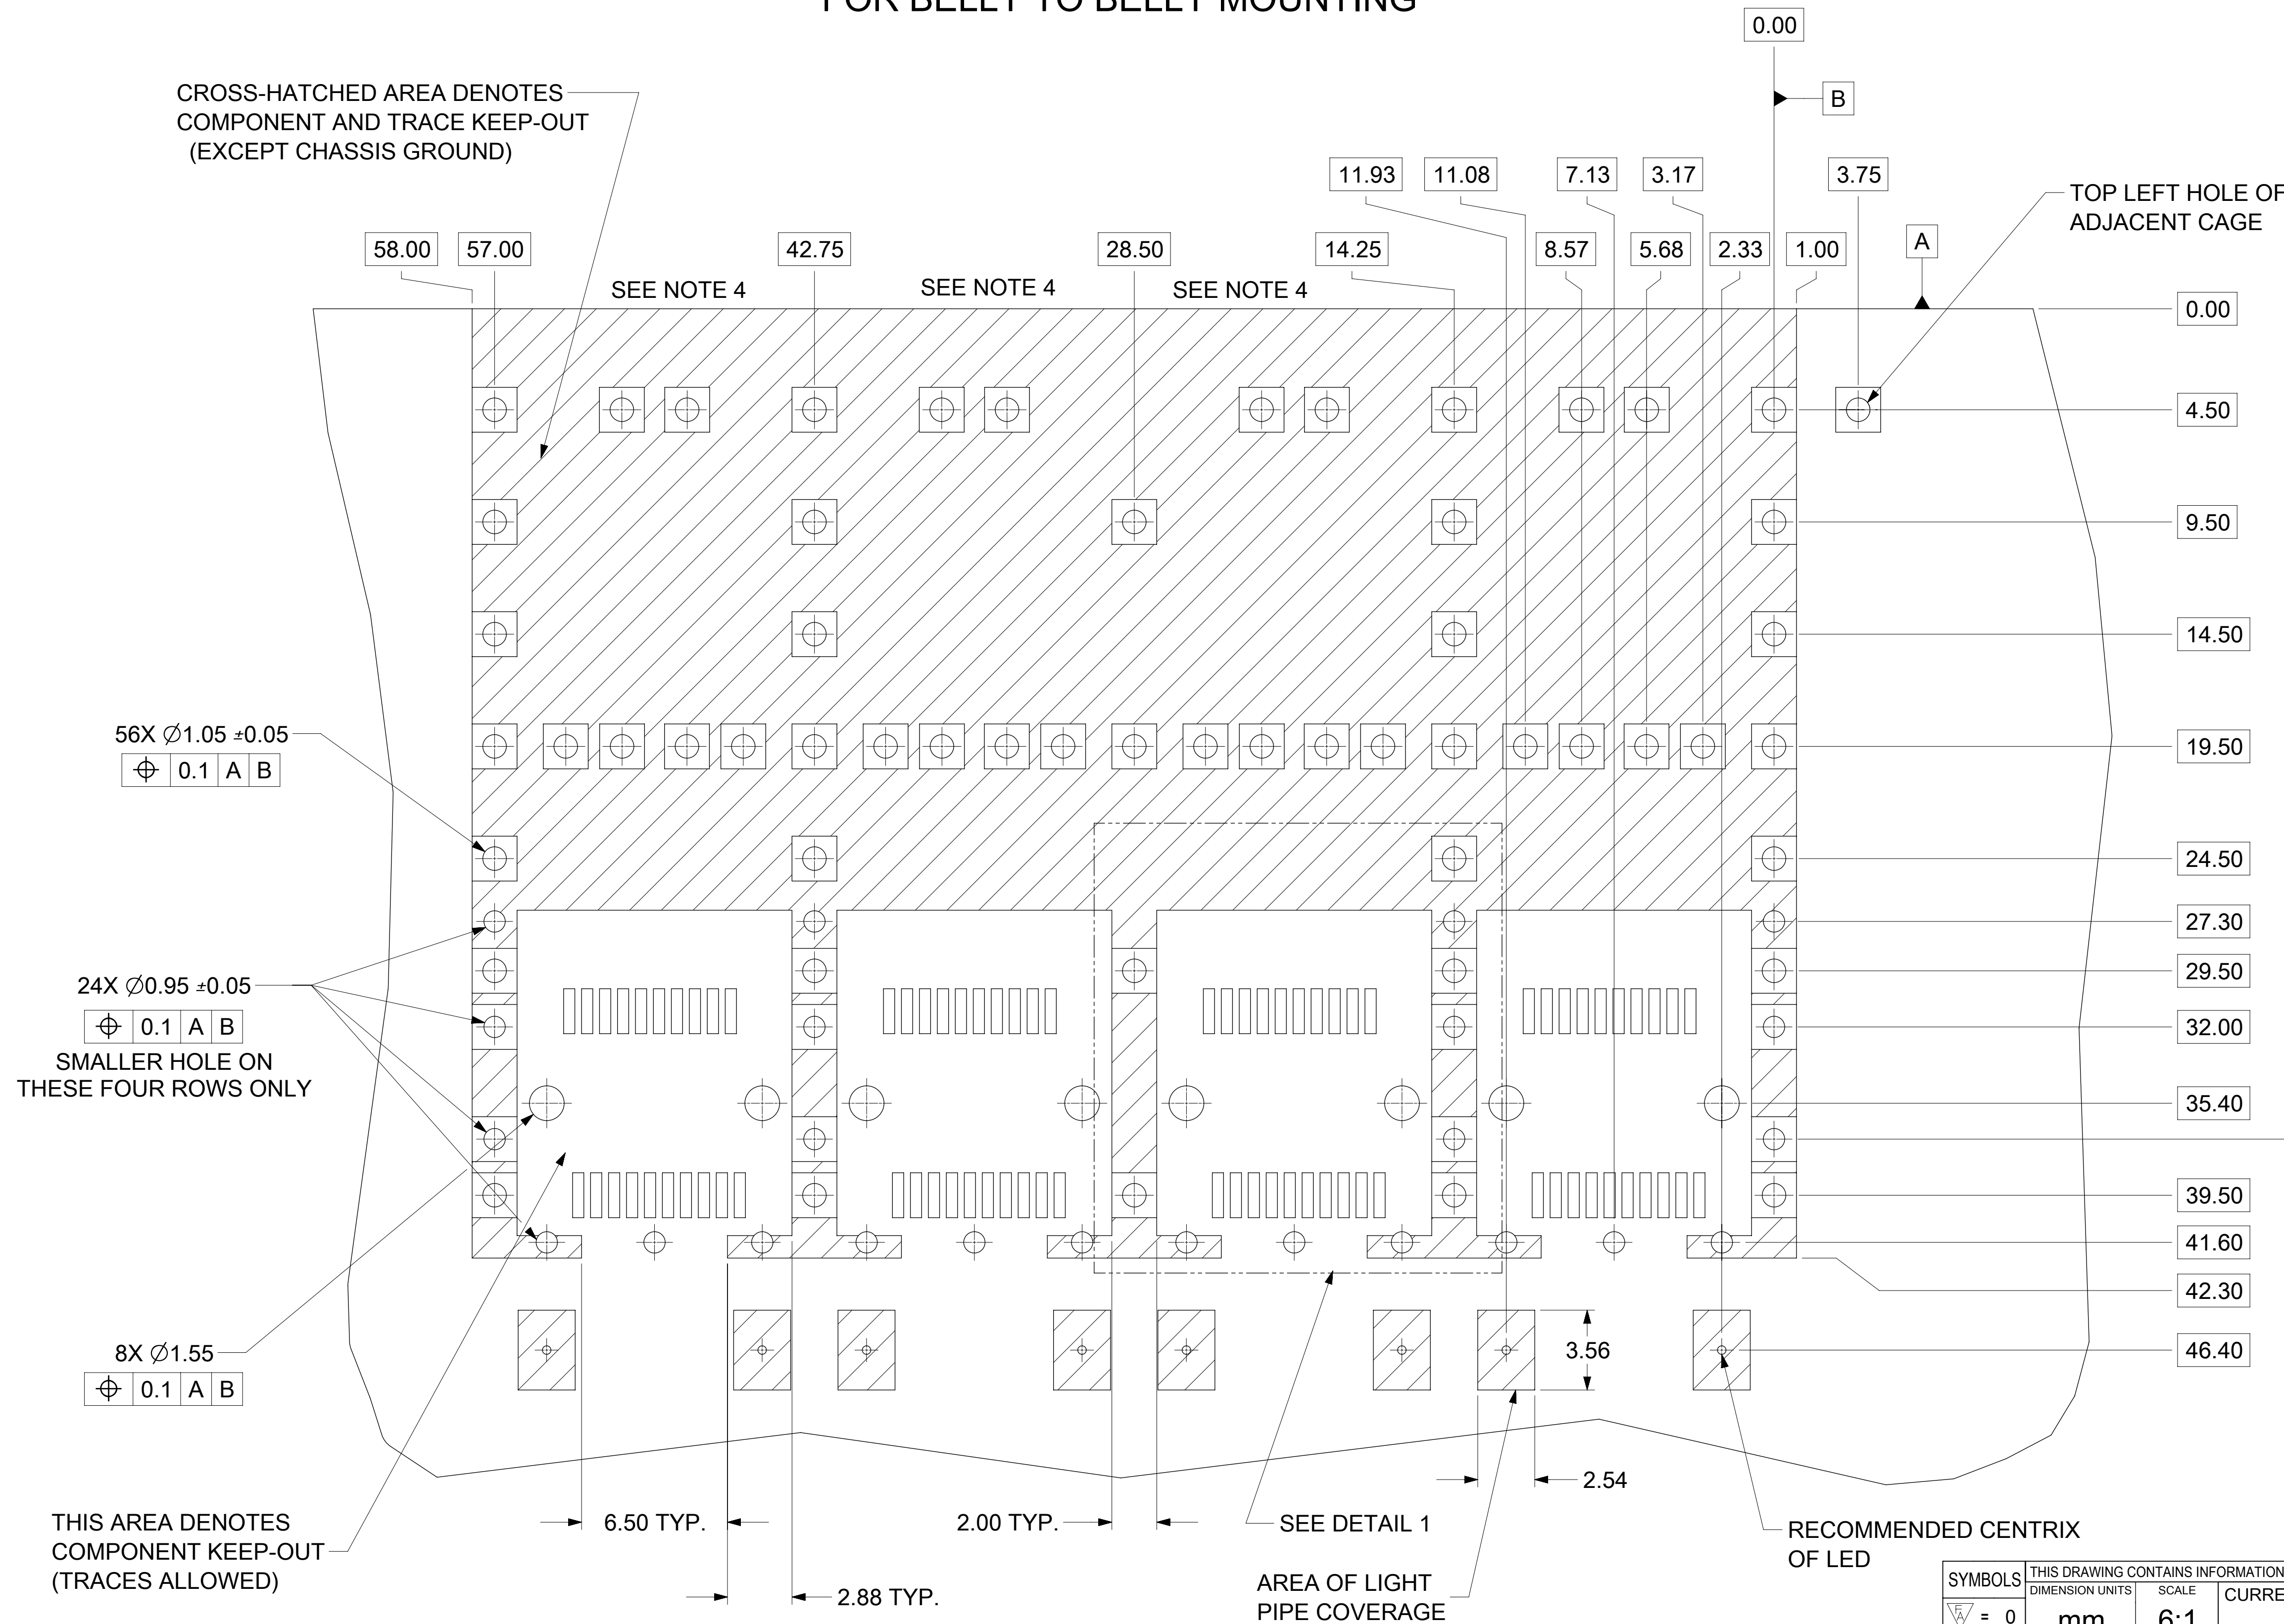

HOST CONNECTOR DETAIL

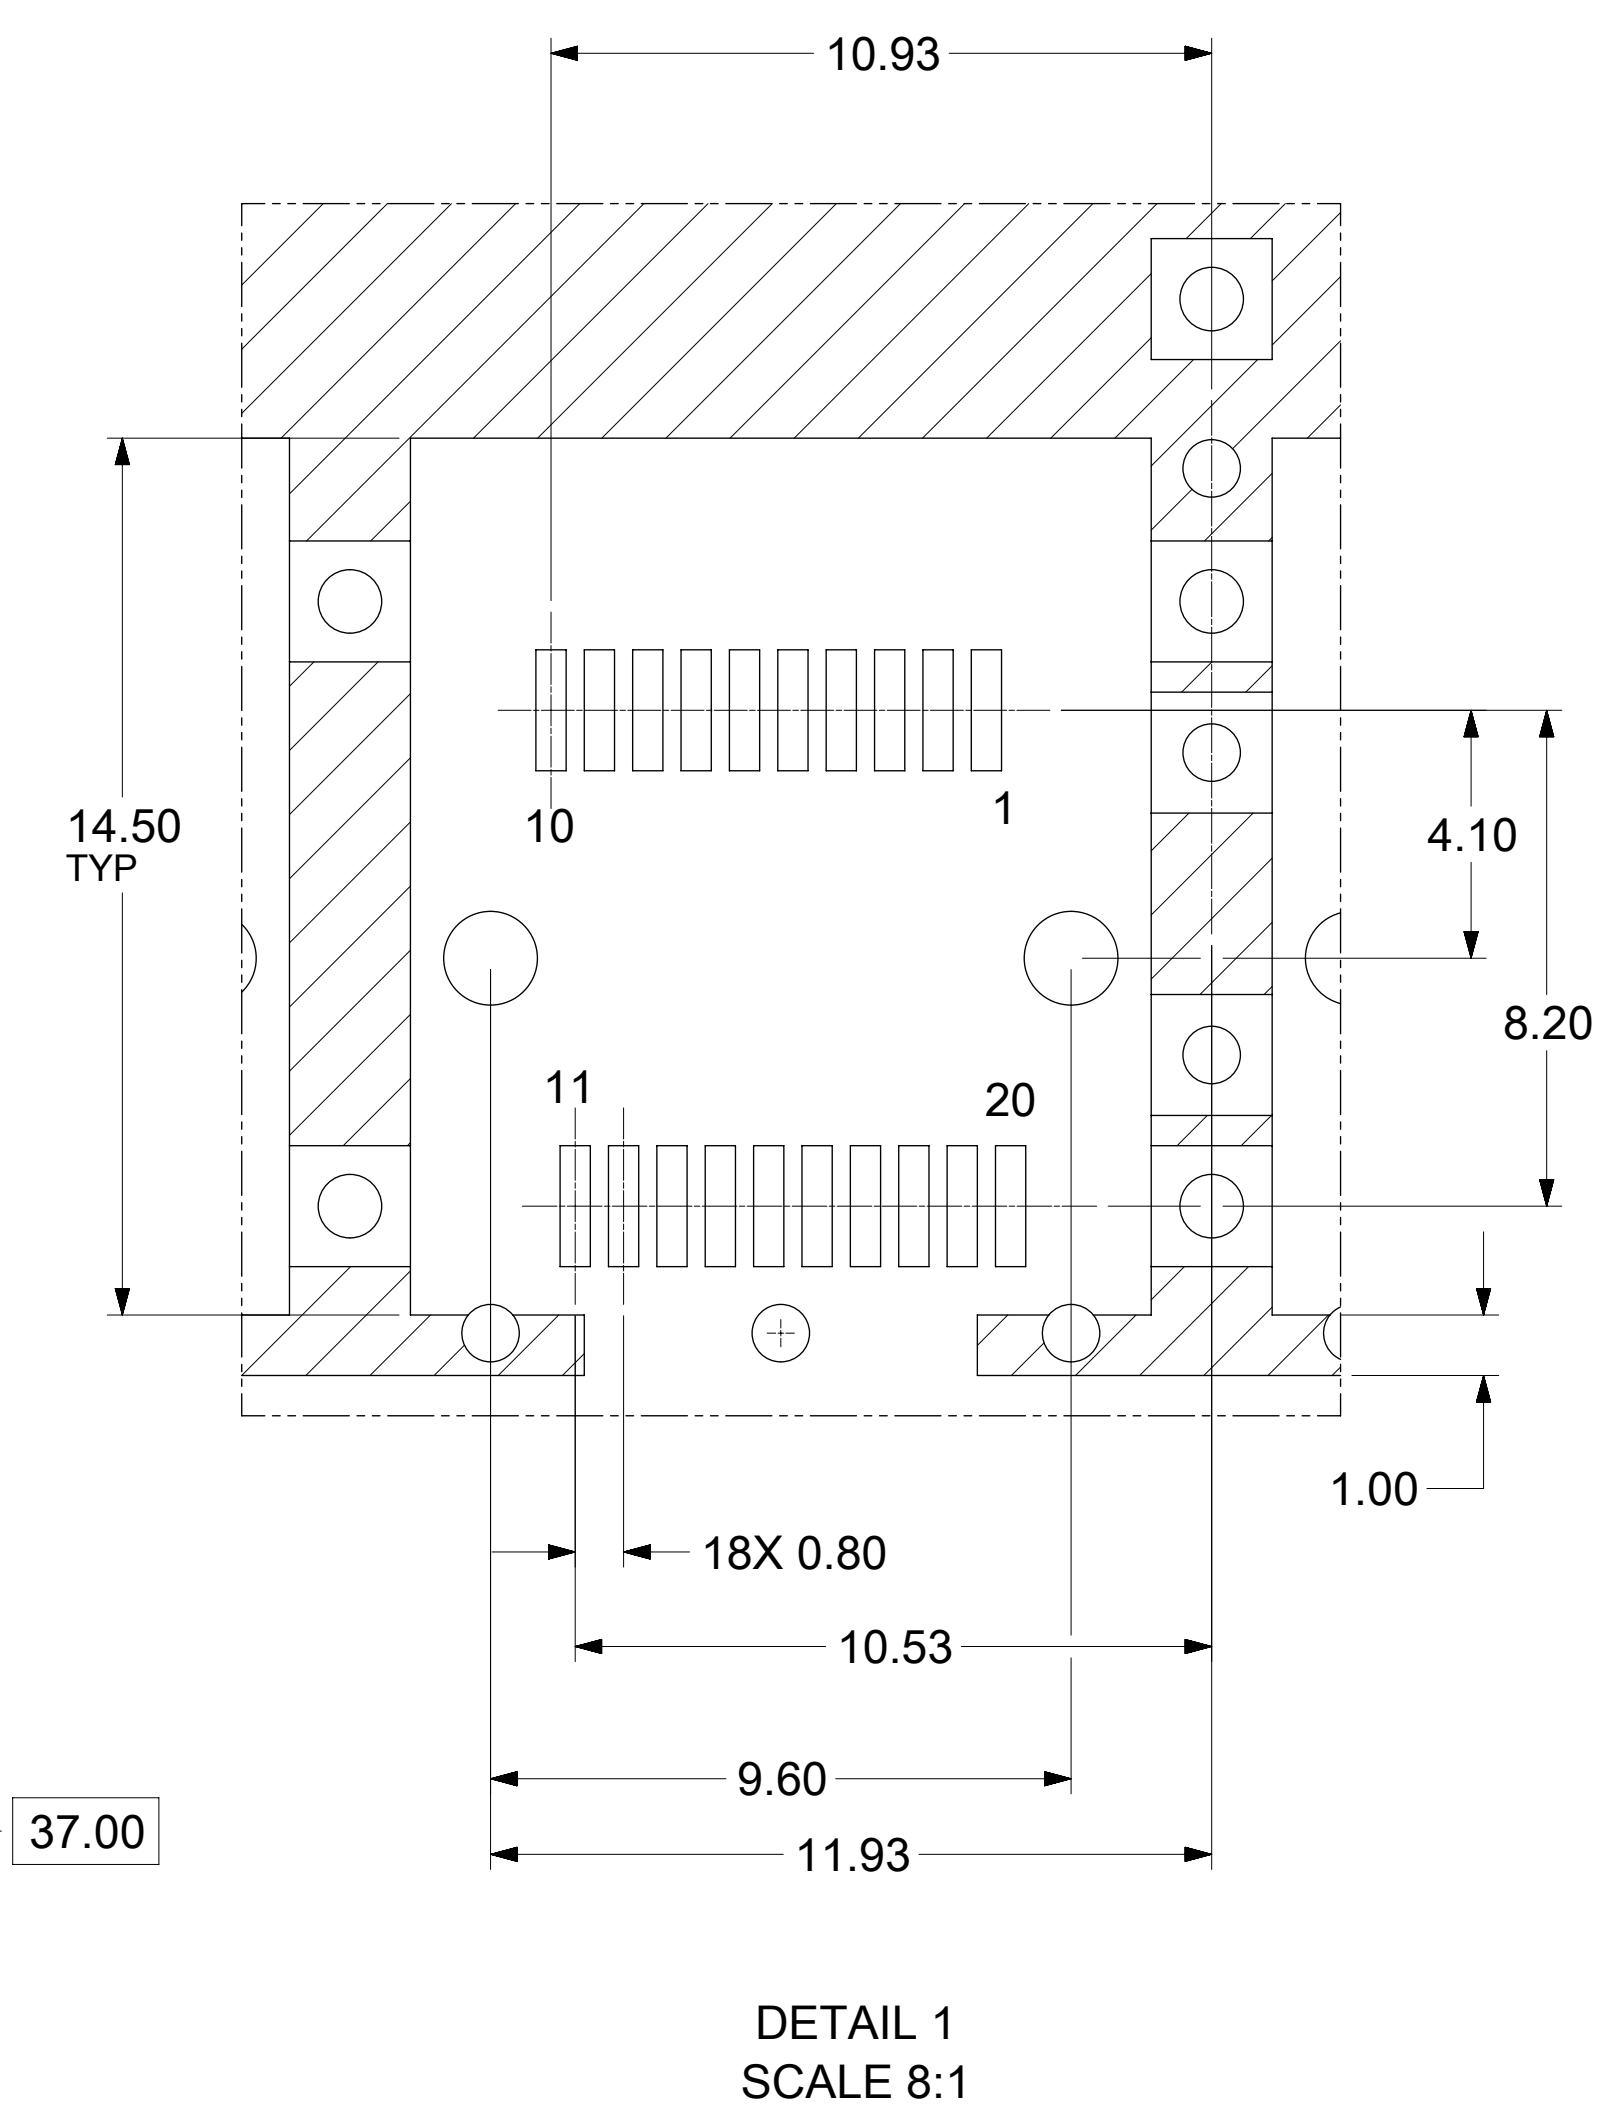

- NOTES:**
- PADS AND VIAS GO TO CHASSIS GROUND, (64 PLACES). RECOMMENDED PADS TO BE 2mm SQUARE.
 - PLATING OPTIONAL FOR THROUGH HOLES, (16 PLACES).
 - RECOMMENDED PLATING INCLUDES HASL, IMMERSION (GOLD OR SILVER), AND OSP.
 - HOLE PATTERN REPEATS FOR EACH PORT, SPACING BETWEEN PORTS IS 14.25.

SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
▽ = 0	DIMENSION UNITS	SCALE	CURRENT REV DESC: SEE REVISION TABLE
▽ = 0	mm	6:1	
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		
▽ = 0	ANGULAR TOL ± 1.0°		EC NO: 618645
▽ = 0	4 PLACES ±		DRWN: JYEN01 2019/06/06
▽ = 0	3 PLACES ±		CHK'D: JCHIANG 2019/06/06
▽ = 0	2 PLACES ± 0.13		APPR: JCHIANG 2019/06/06
▽ = 0	1 PLACE ± 0.25		INITIAL REVISION:
▽ = 0	0 PLACES ±		DRWN: PMAHADEVAPPA 2018/12/18
▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPR: RCHEN08 2019/01/15
▽ = 0	THIRD ANGLE PROJECTION	DRAWING	SERIES
▽ = 0		D-SIZE	74728
DOCUMENT NUMBER		CUSTOMER	SHEET NUMBER
747280002		747280002	2 OF 5


molex

1X4 SFP LIGHT PIPE
COVER ASSEMBLY, LOW PROFILE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
747280002	PSD	ASY	B1

PCB LAYOUT FOR SINGLE SIDE MOUNTING

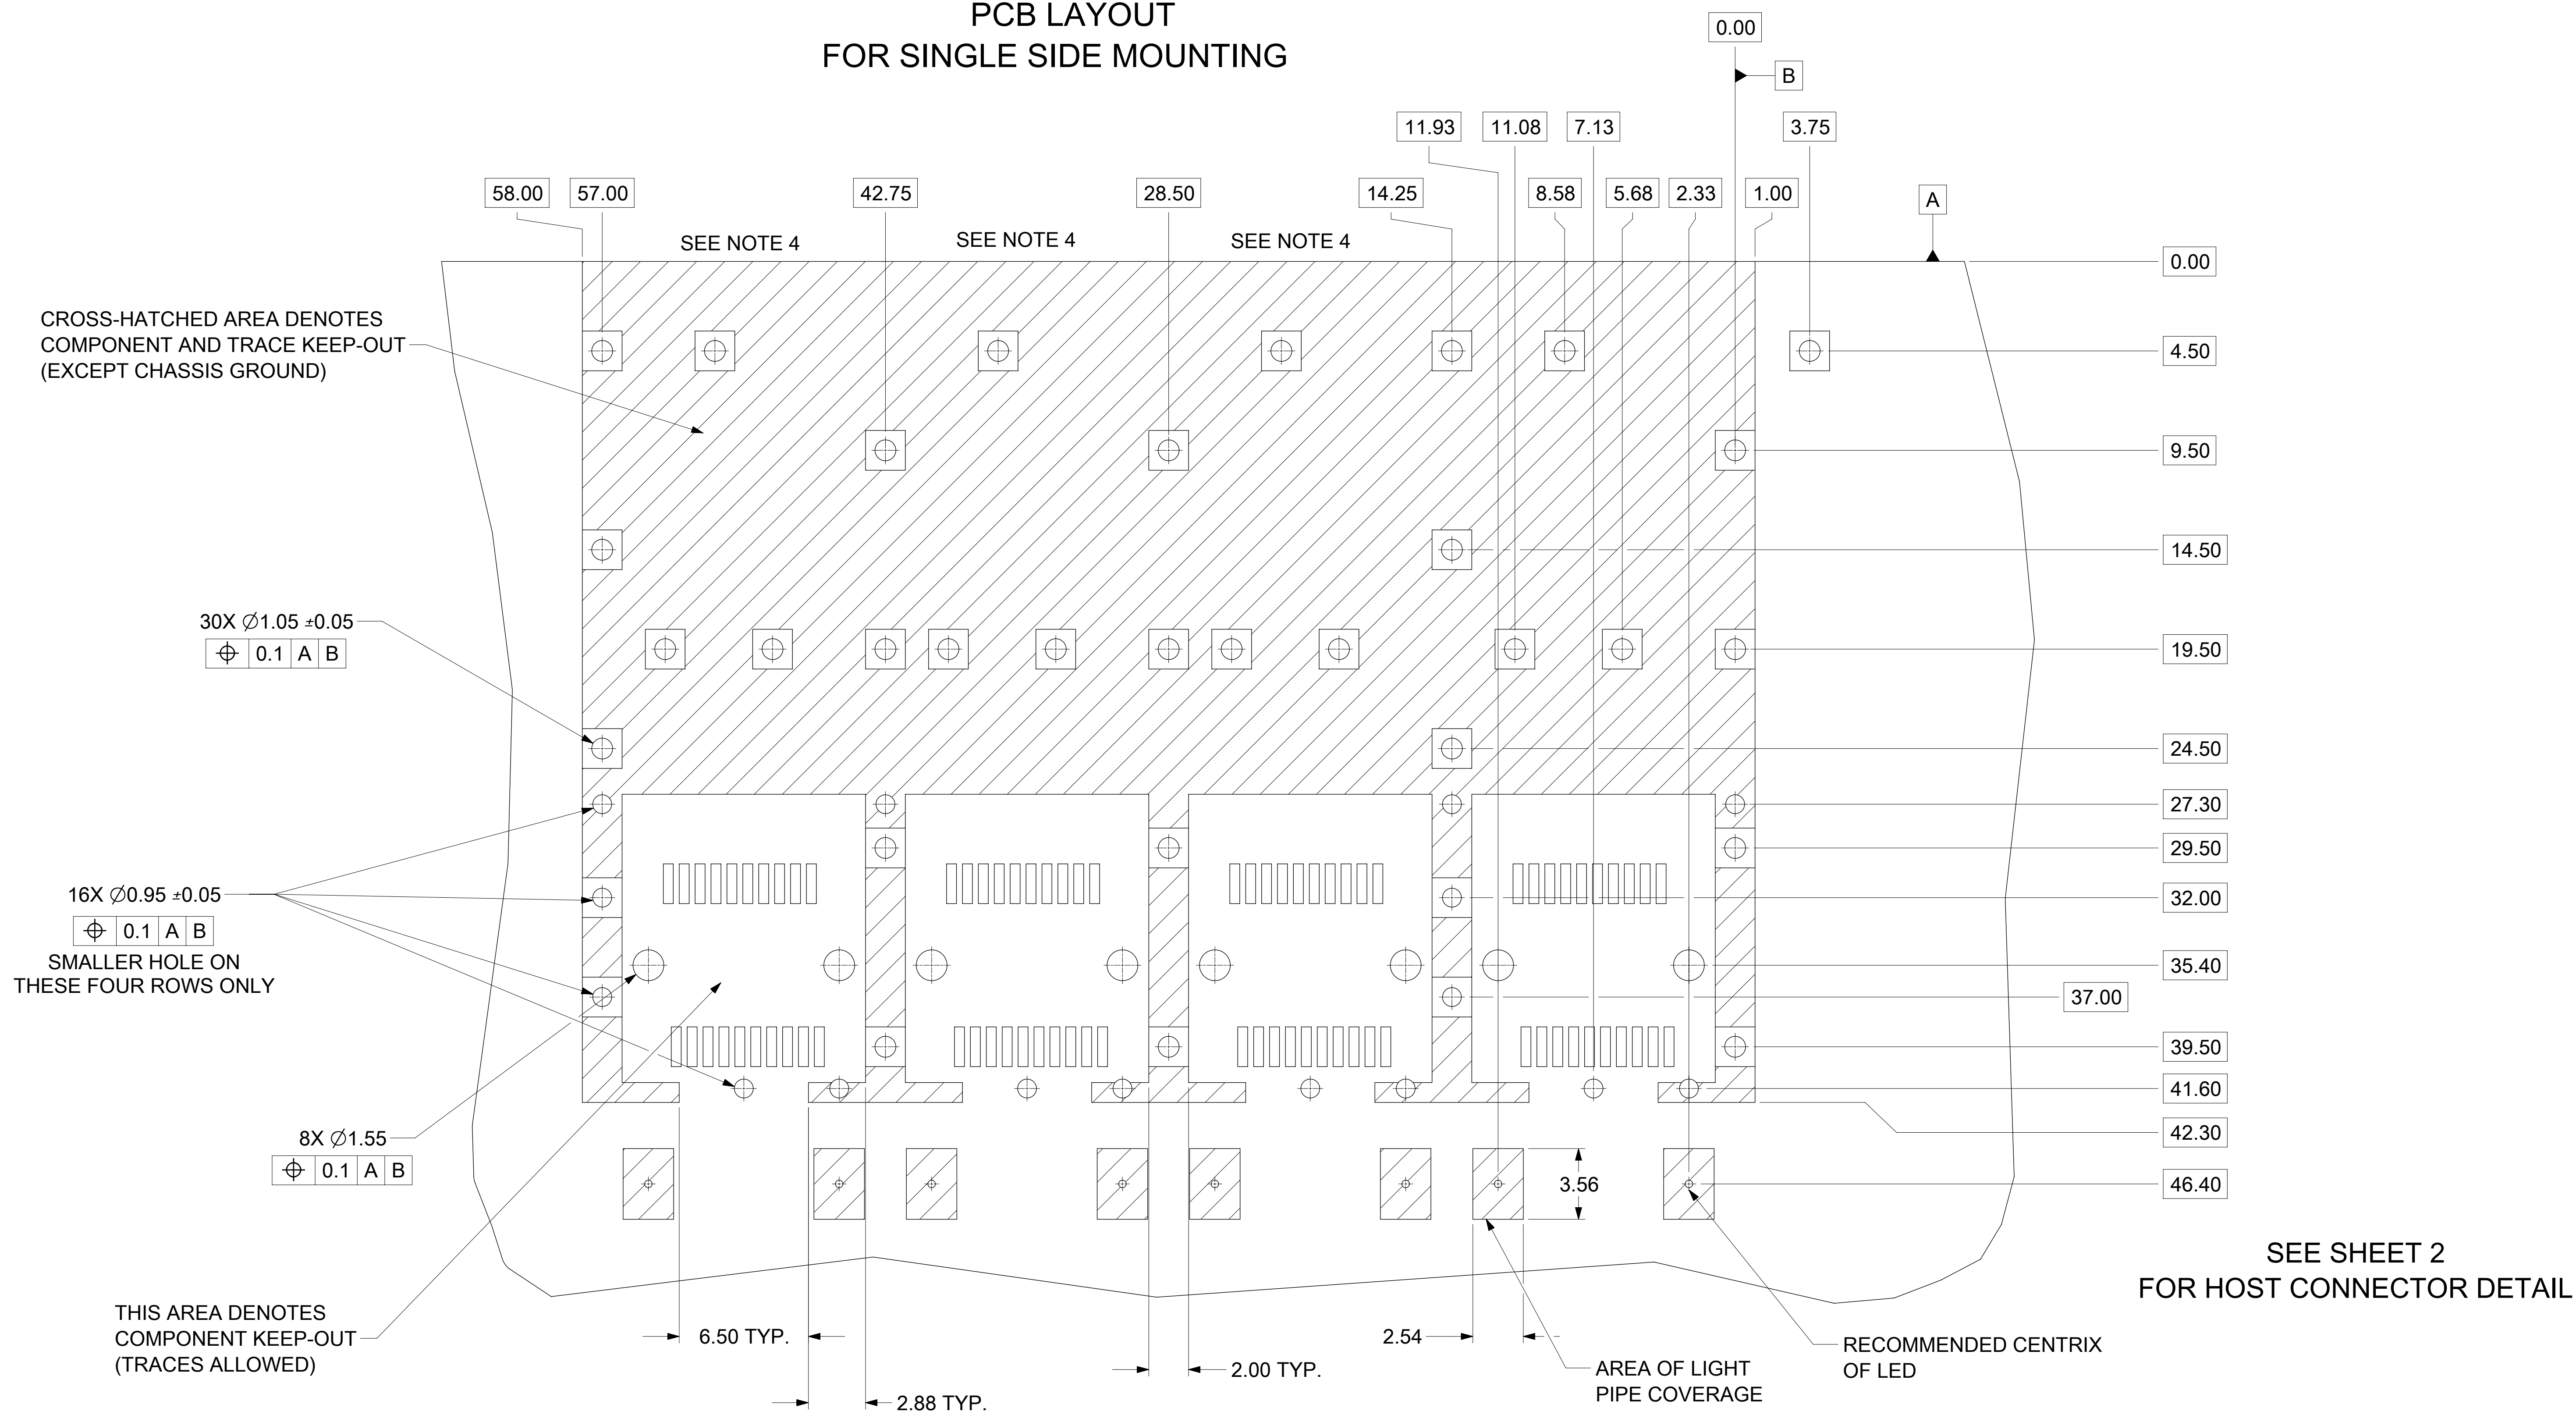



NOTES:

1. PADS AND VIAS GO TO CHASSIS GROUND, (34 PLACES). RECOMMENDED PADS TO BE 2mm SQUARE.
2. PLATING OPTIONAL FOR THROUGH HOLES, (12 PLACES).
3. RECOMMENDED PLATING INCLUDES HASL, IMMERSION (GOLD OR SILVER), AND OSP.
4. HOLE PATTERN REPEATS FOR EACH PORT, SPACING BETWEEN PORTS IS 14.25.



<p>SYMBOLS</p> <p>▽ = 0</p> <p>▽ = 0</p> <p>▽ = 0</p> <p>▽ = 0</p> <p>▽ = 0</p> <p>▽ = 0</p> <p>▽ = 0</p> <p>▽ = 0</p> <p>▽ = 0</p> <p>▽ = 0</p> <p>▽ = 0</p>	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: SEE REVISION TABLE			
	DIMENSION UNITS	SCALE				
	mm	6:1				
	GENERAL TOLERANCES (UNLESS SPECIFIED)					
ANGULAR TOL	±	1.0°	EC NO: 618645			
4 PLACES	±		DRWN: JYEN01	2019/06/06		
3 PLACES	±		CHK'D: JCHIANG	2019/06/06		
2 PLACES	±	0.13	APPR: JCHIANG	2019/06/06		
1 PLACE	±	0.25	INITIAL REVISION:			
0 PLACES	±		DRWN: PMAHADEVAPPA	2018/12/18		
			APPR: RCHEN08	2019/01/15		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
		D-SIZE	74728	747280002		3 OF 5

**SEE SHEET 2
FOR HOST CONNECTOR DETAIL**

BEZEL AND BOARD POSITION DIMENSIONS FOR SINGLE SIDE MOUNTING

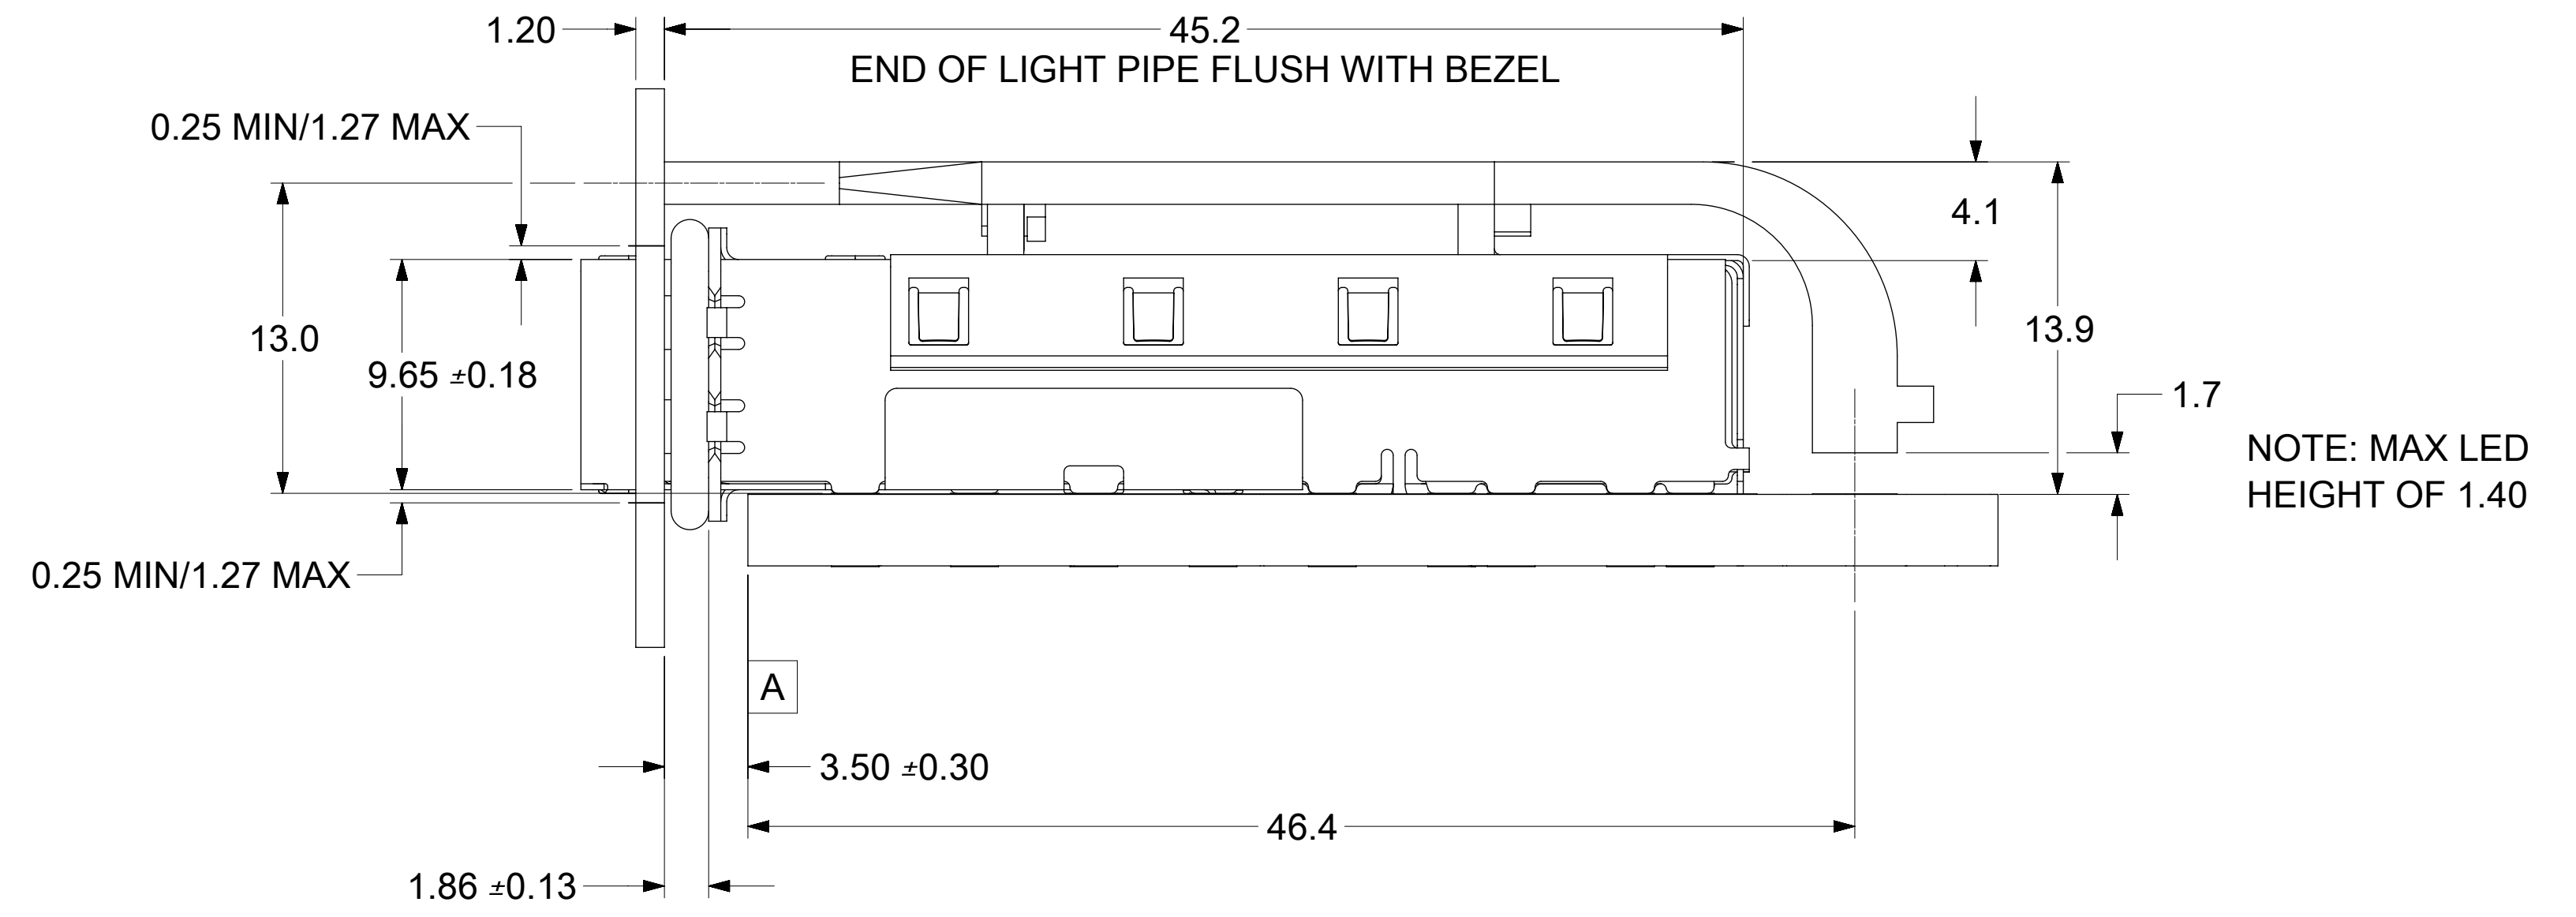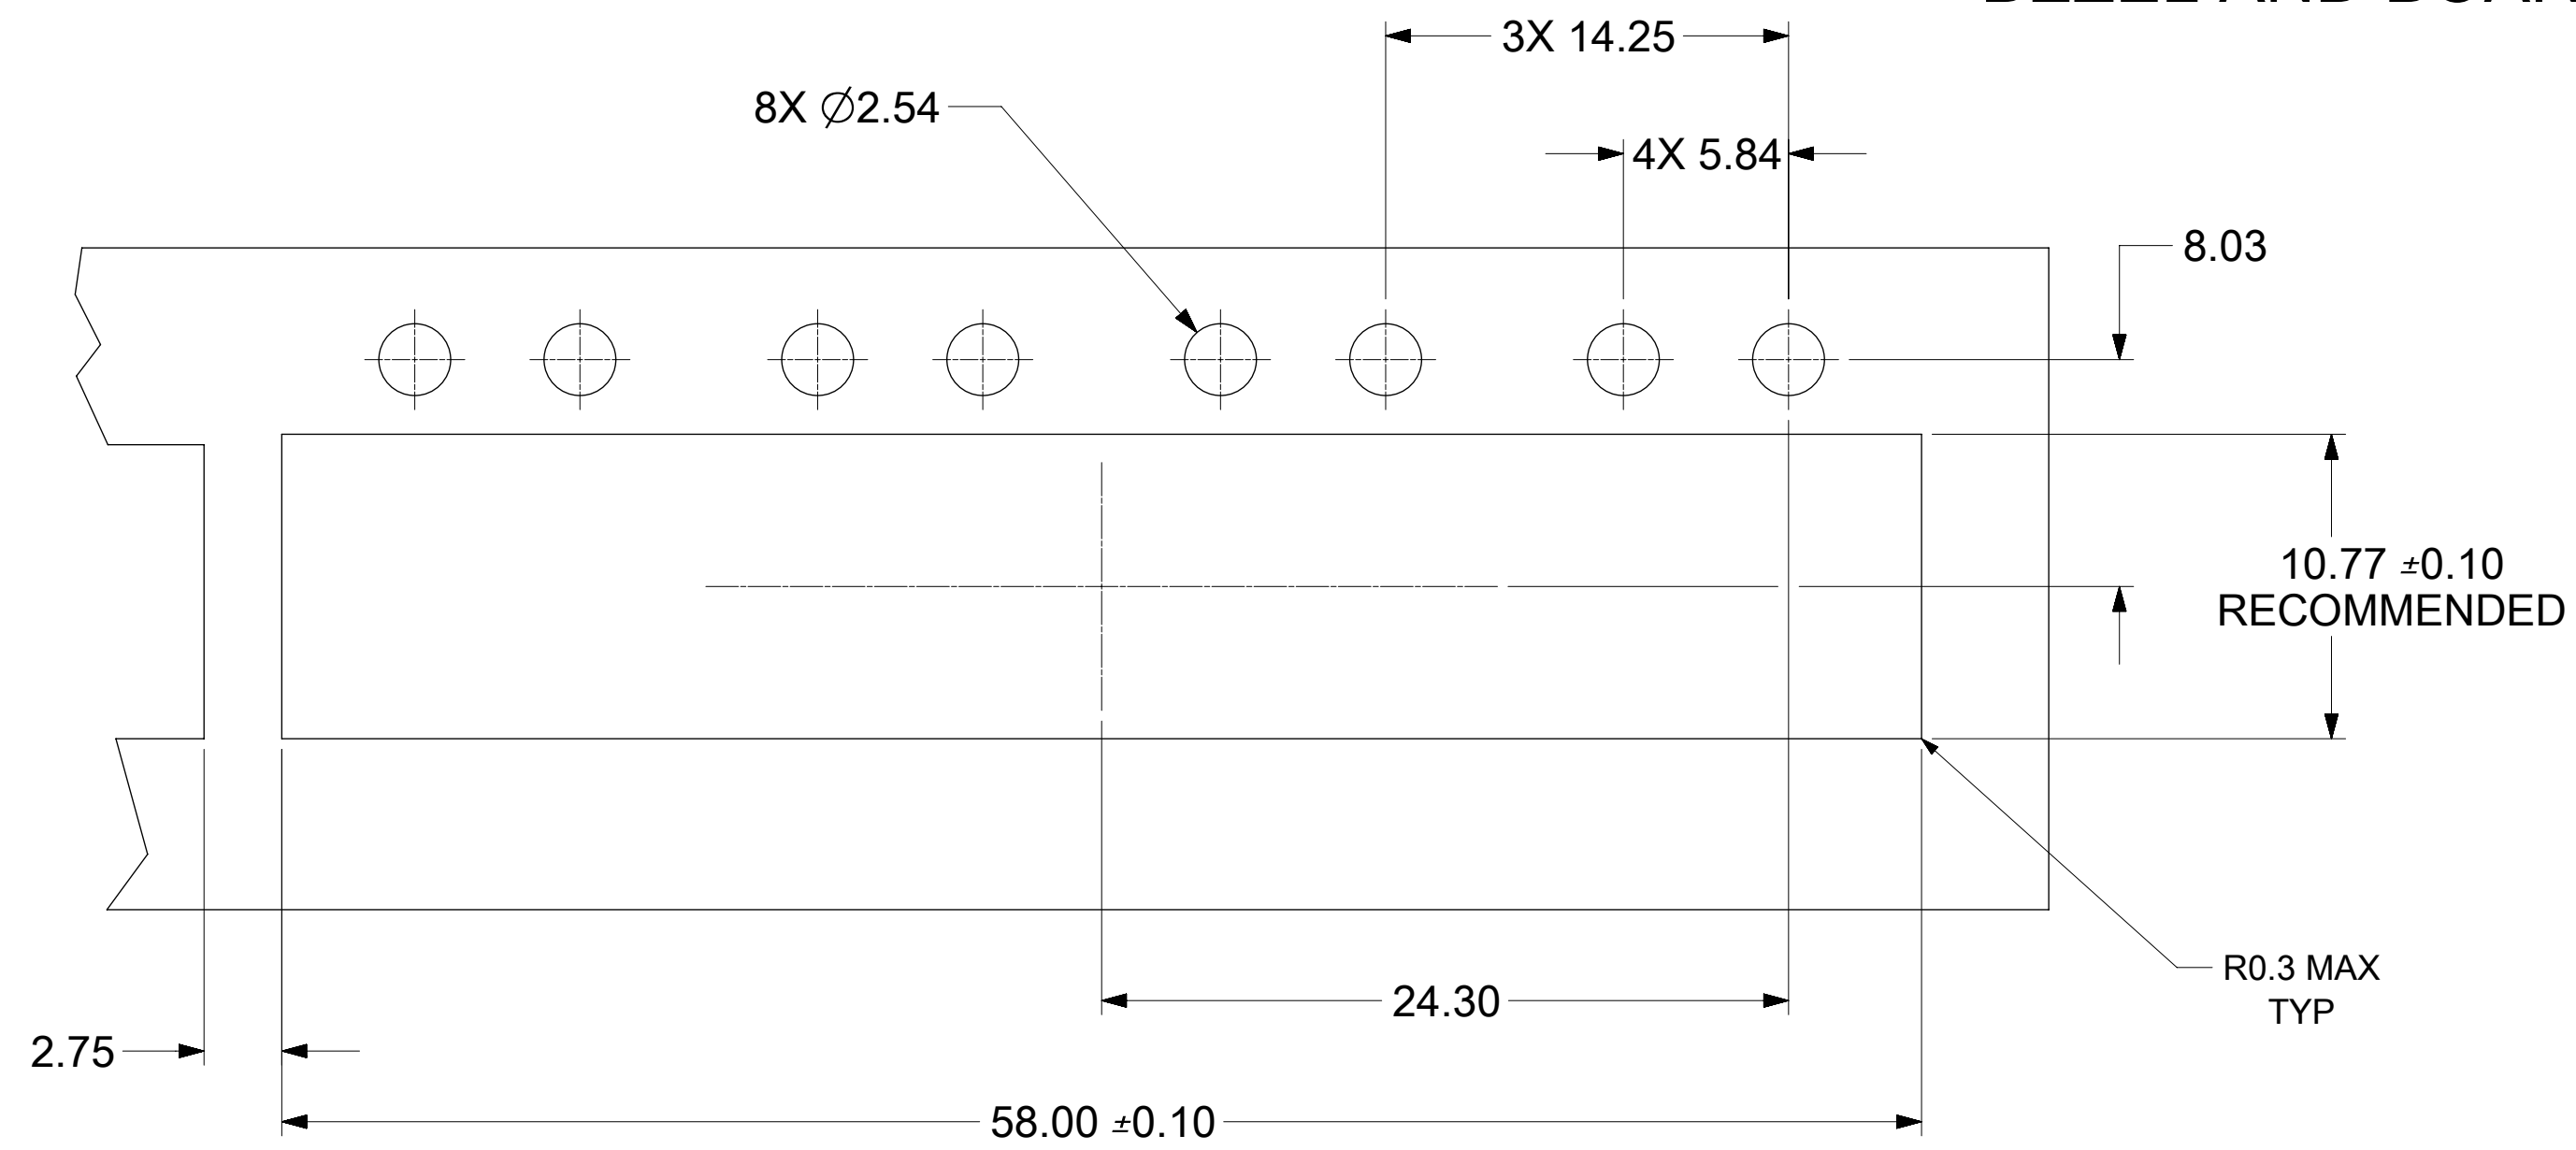




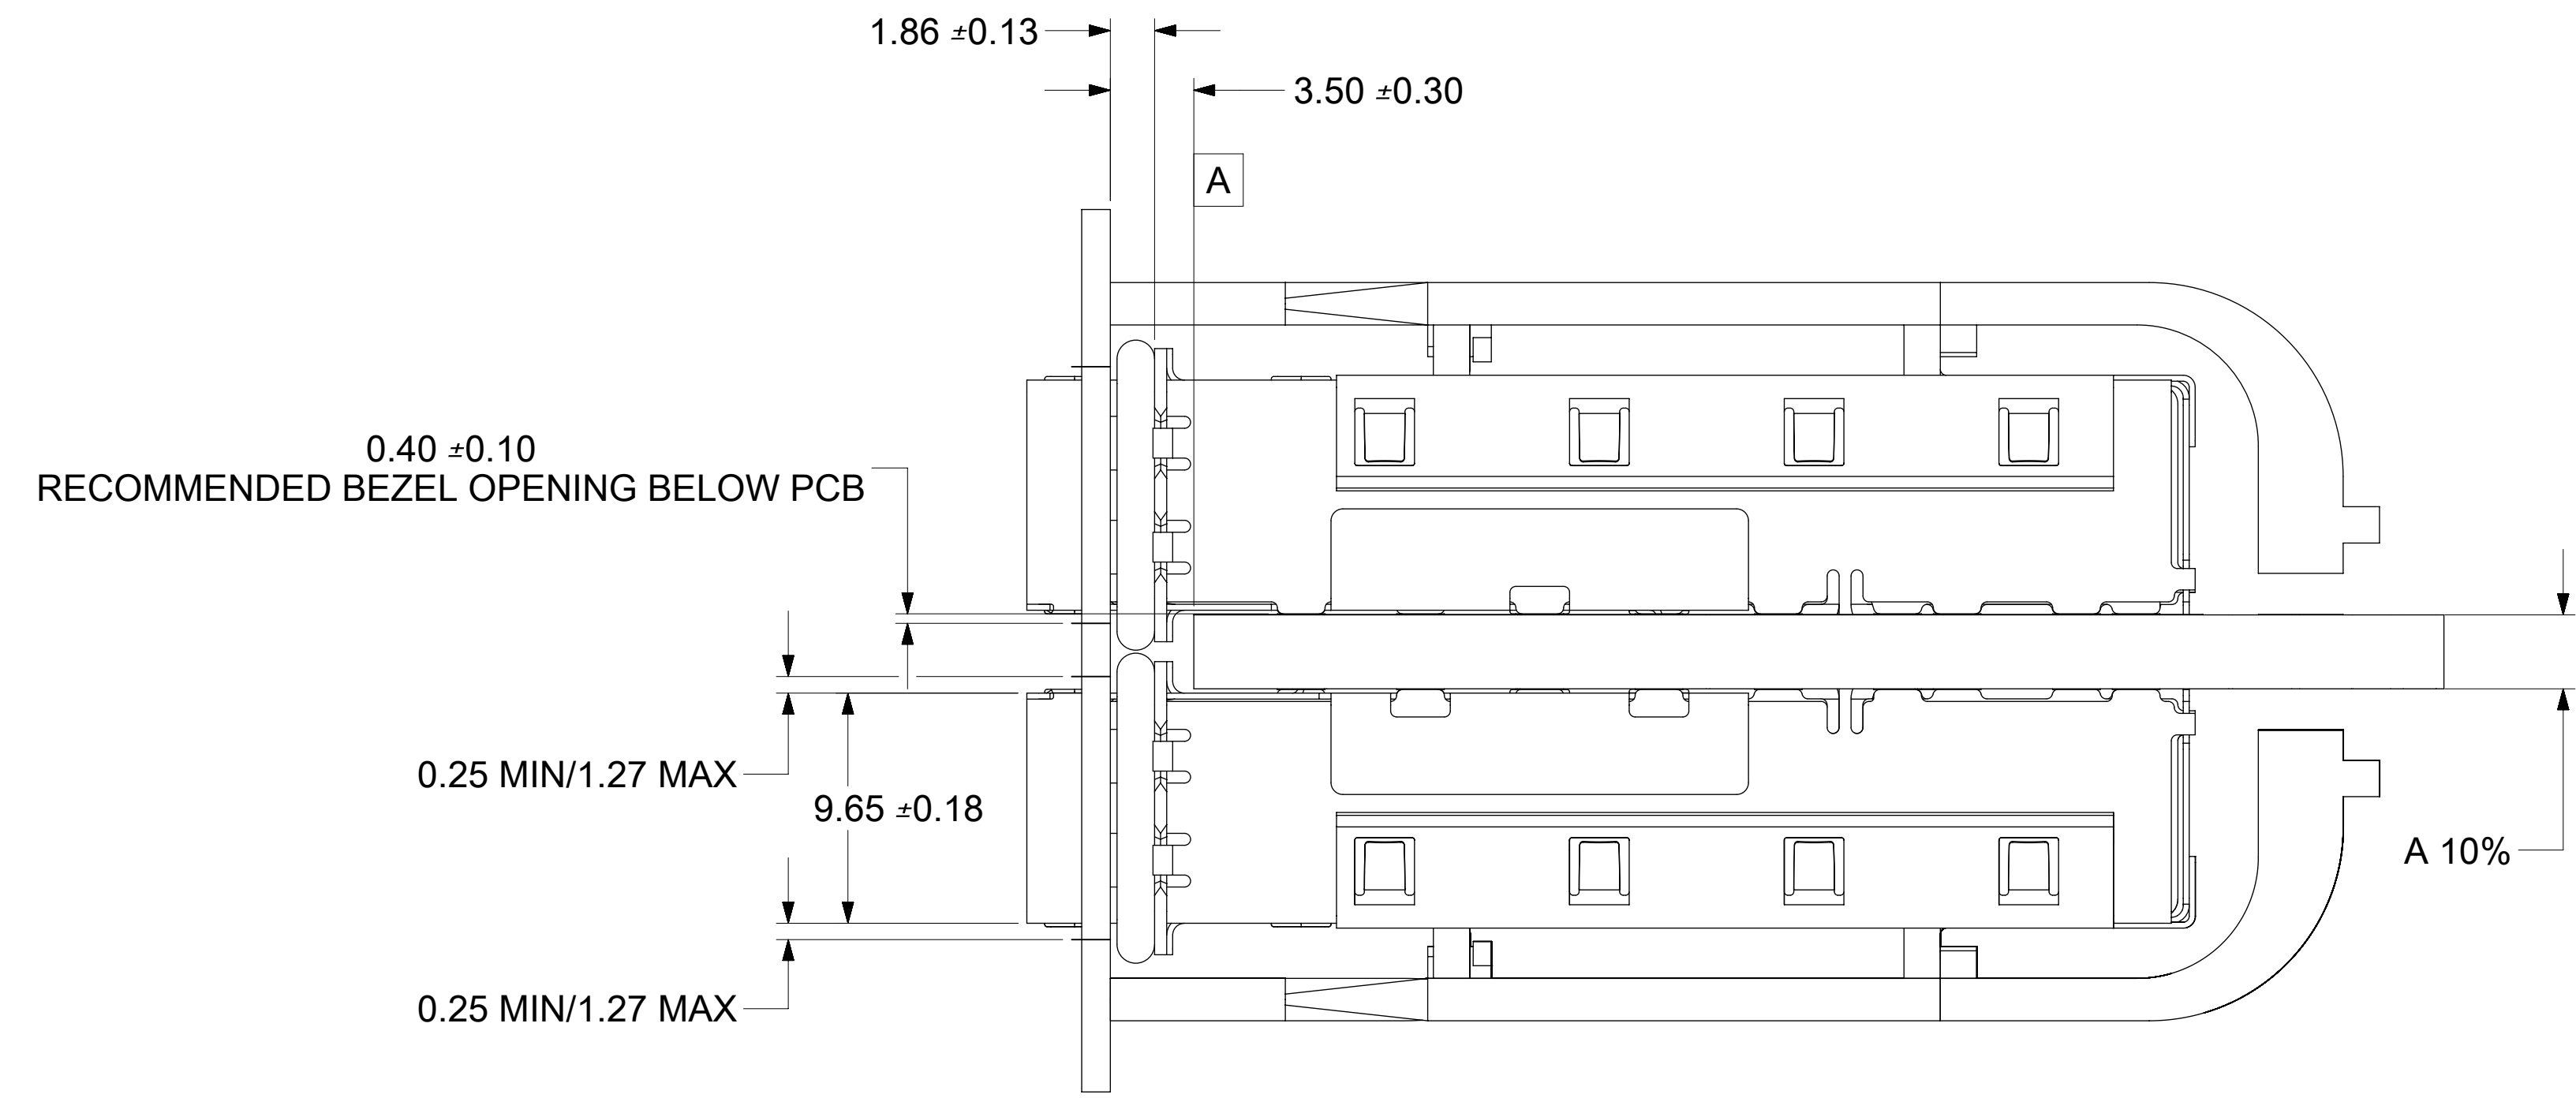
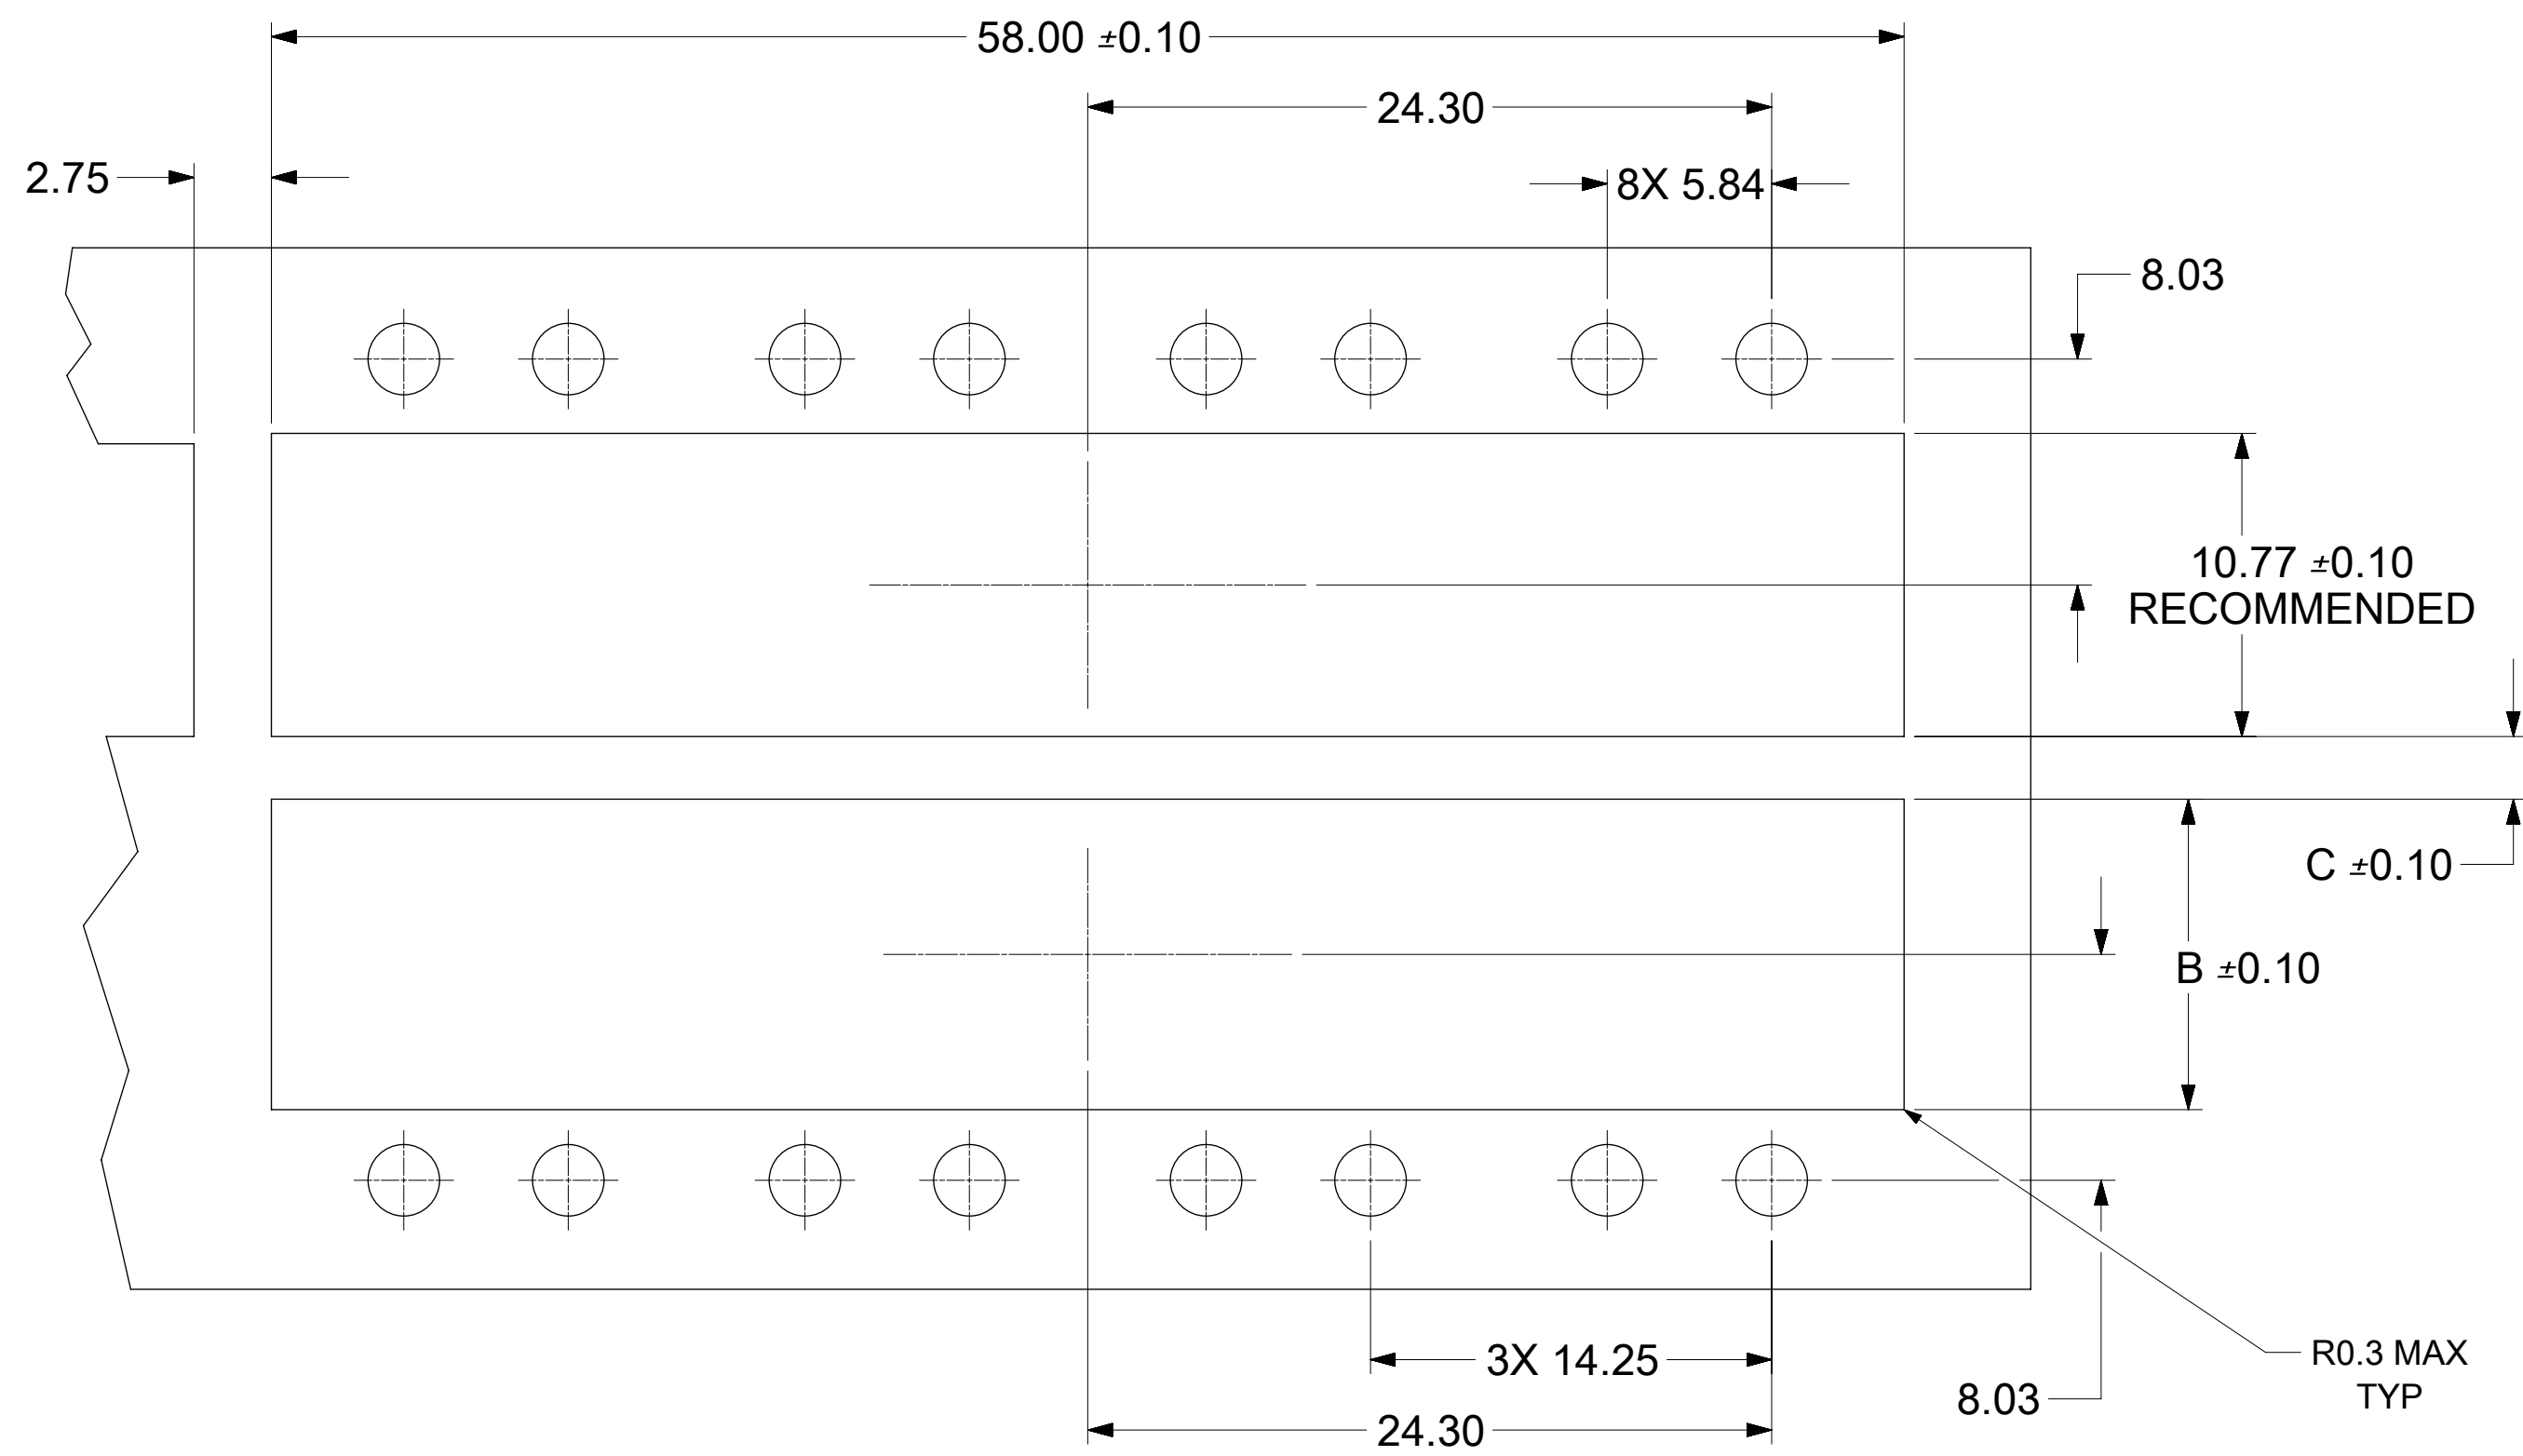


BEZEL AND BOARD POSITION DIMENSIONS FOR BELLY TO BELLY MOUNTING



NOTE: FOR A GIVEN BOARD THICKNESS (A), DIMENSIONS (B) AND (C) ARE DIRECTLY AFFECTED. USE RECOMMENDED DIMENSIONS AND TOLERANCES TO AID IN DEVELOPING BEZEL OPENING. FOR EXAMPLE USING A BOARD THICKNESS OF 3.18mm THE RECOMMENDED VALUES WOULD BE:
 A= 3.18 ±10%
 B= 11.03 ±.10
 C= 2.23 ±.10

SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
▽ = 0	DIMENSION UNITS	SCALE	CURRENT REV DESC: SEE REVISION TABLE
▽ = 0	mm	4:1	
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		
▽ = 0	ANGULAR TOL	± 1.0°	
▽ = 0	4 PLACES	±	EC NO: 618645
▽ = 0	3 PLACES	±	DRWN: JYEN01 2019/06/06
▽ = 0	2 PLACES	± 0.13	CHK'D: JCHIANG 2019/06/06
▽ = 0	1 PLACE	± 0.25	APPR: JCHIANG 2019/06/06
▽ = 0	0 PLACES	±	INITIAL REVISION:
▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRWN: PMAHADEVAPPA 2018/12/18
▽ = 0	THIRD ANGLE PROJECTION		APPR: RCHEN08 2019/01/15
DRAWING		SERIES	DOCUMENT NUMBER
D-SIZE		74728	747280002
CUSTOMER		MATERIAL NUMBER	DOC TYPE DOC PART REVISION
		747280002	PSD ASY B1
SHEET NUMBER		4 OF 5	

DATE	REV	DESCRIPTION
2005/11/05	A	INITIAL RELEASE
2018/12/18	B	1. REMASTERED FROM SD-74728-002 REV_A TO 747280002 PSD ASY REV_B IN NX/ECTR. 2. REMOVED INCH DIMENSIONS IN ALL SHEETS. 3. SHEET 1: E4: VIEW ADDED FOR DATE CODE REPRESENTATION.
2019/06/06	B1	SHEET 1: ADDED "DISCOLORATION IS NOT ALLOWED" TO NOTE 6.





SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	 = 0  = 0  = 0  = 0  = 0  = 0  = 0	DIMENSION UNITS mm	SCALE 1:1	CURRENT REV DESC: SEE REVISION TABLE								
GENERAL TOLERANCES (UNLESS SPECIFIED)			EC NO: 618645									
ANGULAR TOL ± 1.0°			4 PLACES ±			2019/06/06			DRWN: JYEN01			
ANGULAR TOL ± 1.0°			3 PLACES ±			2019/06/06						
ANGULAR TOL ± 1.0°			2 PLACES ± 0.13			2019/06/06			CHK'D: JCHIANG			
ANGULAR TOL ± 1.0°			1 PLACE ± 0.25			2019/06/06						
ANGULAR TOL ± 1.0°			0 PLACES ±			2019/06/06			INITIAL REVISION:			
ANGULAR TOL ± 1.0°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION						DRAWING
ANGULAR TOL ± 1.0°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION			DRAWING			
ANGULAR TOL ± 1.0°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION			DRAWING			
ANGULAR TOL ± 1.0°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION			DRAWING			
ANGULAR TOL ± 1.0°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION			DRAWING			

molex

1X4 SFP LIGHT PIPE COVER ASSEMBLY, LOW PROFILE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
747280002	PSD	ASY	B1

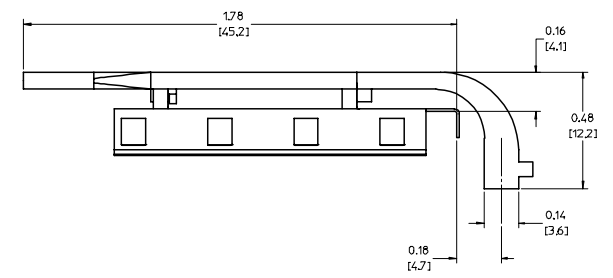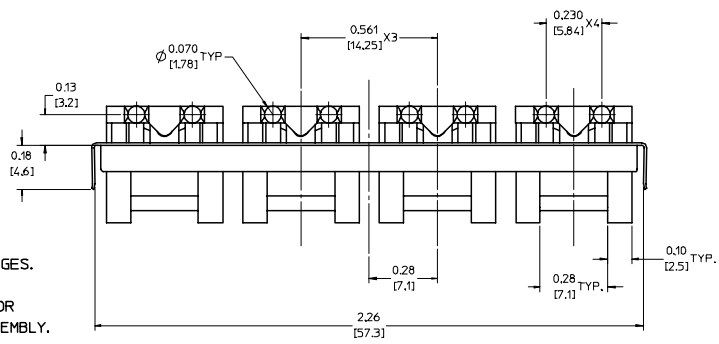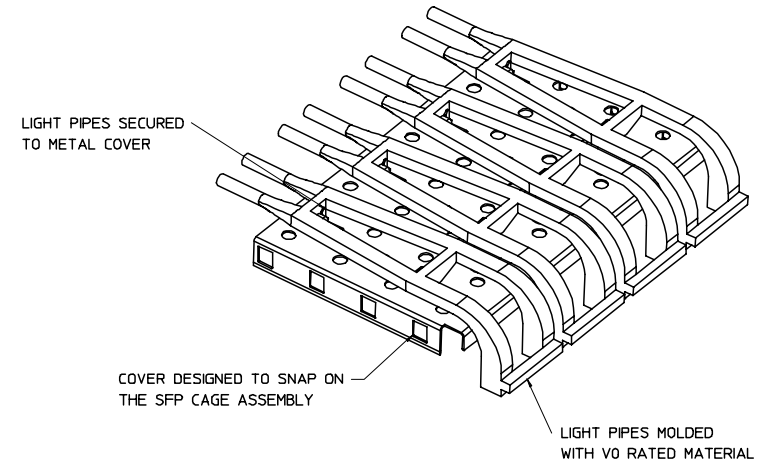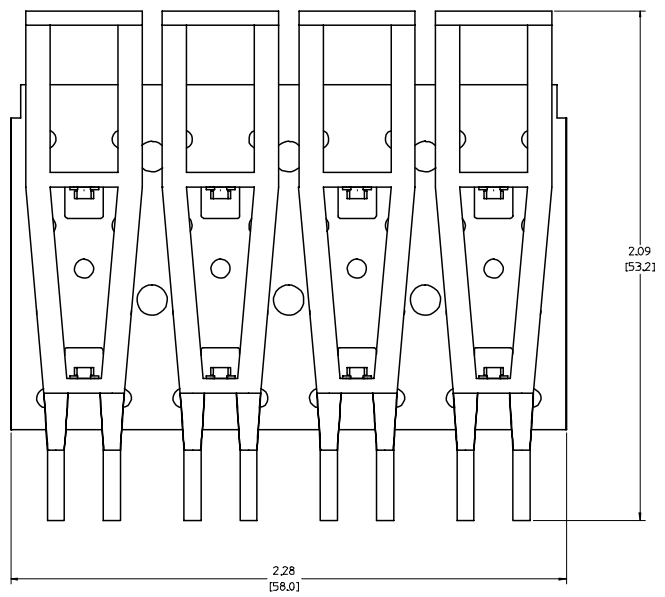

NOTES:

1. THIS LIGHT PIPE ASSEMBLY TO BE USED WITH SERIES 74728, 1X4 CAGES.
2. IT IS RECOMMENDED THAT THE CAGE ASSEMBLY BE PRESSED INTO OR SOLDERED TO THE PCB PRIOR TO ASSEMBLING THE LIGHT PIPE ASSEMBLY.
3. LED'S TO HAVE A MAXIMUM HEIGHT OF 1.4mm AND A MINIMUM HEIGHT OF 0.7mm
4. RECOMMENDED LED'S INCLUDE THE FOLLOWING MANUFACTURES:

- DIALIGHT: 597-77x1-5xx SERIES
- CHICAGO MINIATURE: 7016 SERIES
- KINGBRIGHT: APBL3025 SERIES (BICOLOR)
APL3015 SERIES (SINGLE COLOR)

5. THIS PART MEETS THE RESTRICTION OF HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (ROHS) DIRECTIVE (2002/95/EC).

ENTER DESCRIPTION EC NO: UST2006-0124 DRAWN BY: DRINKS MONSON 2005/11/05 CHECKED BY: CHFKBRUSSELL 2005/11/05 APPR: BRUSSELL 2005/11/16	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± 0.13 ± .01 1 PLACE ± 0.25 ± --- ANGULAR ± 1 °	mm INCH	DRAWN BY: KS IMONSO CHECKED BY: BRUSSELL APPROVED BY: BRUSSELL	DATE: 2005/11/05 DATE: 2005/11/05 DATE: 2005/11/05	TITLE 1X4 SFP LIGHT PIPE COVER ASSEMBLY, LOW PROFILE	MATERIAL NO: 747280002	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

PCB LAYOUT FOR BELLY TO BELLY MOUNTING


CROSS-HATCHED AREA DENOTES COMPONENT AND TRACE KEEP-OUT (EXCEPT CHASSIS GROUND)

SEE NOTE 4

SEE NOTE 4

SEE NOTE 4

HOST CONNECTOR DETAIL

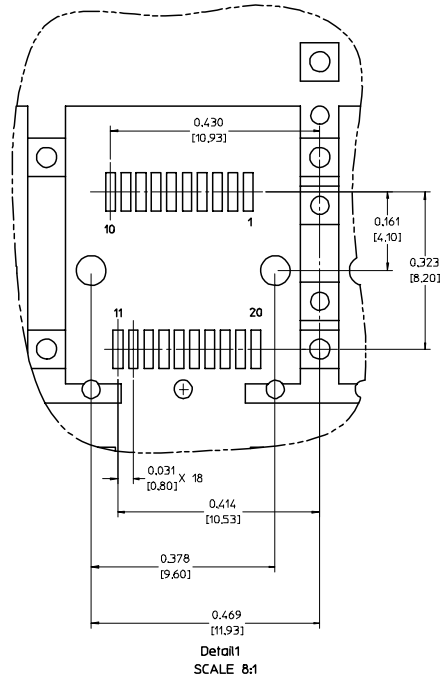

2.283 [58.00]

2.244 [57.00]

1.683 [42.75]

1.122 [28.50]

0.561 [14.25]

0.436 [11.08]

0.281 [7.13]

0.125 [3.17]

0.470 [11.93]

0.337 [8.57]

0.224 [5.68]

0.092 [2.33]

0.039 [1.00]

0.148 [3.75]

0.000 [0.00]

TOP LEFT HOLE OF ADJACENT CAGE

0.000 [0.00]

0.177 [4.50]

0.374 [9.50]

0.571 [14.50]

0.768 [19.50]

0.965 [24.50]

1.075 [27.30]

1.161 [29.50]

1.260 [32.00]

1.394 [35.40]

1.457 [37.00]

1.555 [39.50]

1.638 [41.60]

1.665 [42.30]

1.827 [46.40]

$\varnothing 0.041 \pm 0.002$
[1.05 ± 0.05] X56
 $\varnothing .004 [A|B]$

$\varnothing 0.037 \pm 0.002$
[0.95 ± 0.05] X24
 $\varnothing .004 [A|B]$
SMALLER HOLE ON THESE FOUR ROWS ONLY

$\varnothing 0.061$ X8
[1.55] X8
 $\varnothing .004 [A|B]$

0.571 TYP.
[14.50] TYP.

0.256 TYP.
[6.50] TYP.

0.039 TYP.
[1.00] TYP.

0.079 TYP.
[2.00] TYP.

0.113 TYP.
[2.88] TYP.

0.140
[3.56]

0.100
[2.54]

SEE Detail1

AREA OF LIGHT PIPE COVERAGE

RECOMMENDED CENTRIX OF LED

- NOTES:
- PADS AND VIAS GO TO CHASSIS GROUND. (64 PLACES). RECOMMENDED PADS TO BE 2mm SQUARE.
 - PLATING OPTIONAL FOR THROUGH HOLES. (16 PLACES).
 - RECOMMENDED PLATING INCLUDES HASL, IMMERSION (GOLD OR SILVER), AND OSP.
 - HOLE PATTERN REPEATS FOR EACH PORT. SPACING BETWEEN PORTS IS 5.61 [14.25].

ENTER DESCRIPTION EC NO: UST2006-0724 DRINKS MONSON 2005/11/05 CHK:BRUSSELL 2005/11/05 APPR:BRUSSELL 2005/11/16	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	$\nabla=0$ $\nabla=0$	mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± 0.13 ± .01 1 PLACE ± 0.25 ± --- ANGULAR ± 1 °	IN/MM DRAWN BY DATE KS IMONSO 2005/11/05 CHECKED BY DATE BRUSSELL 2005/11/05 APPROVED BY DATE BRUSSELL 2005/11/05	6:1	METRIC	TITLE 1X4 SFP LIGHT PIPE COVER ASSEMBLY, LOW PROFILE MOLEX INCORPORATED
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. 747280002	DOCUMENT NO. SD-74728-002	SHEET NO. 2 OF 5		
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

PCB LAYOUT FOR SINGLE SIDE MOUNTING

CROSS-HATCHED AREA DENOTES
COMPONENT AND TRACE KEEP-OUT
(EXCEPT CHASSIS GROUND)

$\varnothing 0.041 \pm 0.002$
(1.05 ± 0.05)
[Φ] .004 [A/B] X30

$\varnothing 0.037 \pm 0.002$
(0.95 ± 0.05)
[Φ] .004 [A/B]
SMALLER HOLE ON
THESE FOUR ROWS ONLY

THIS AREA DENOTES
COMPONENT KEEP-OUT
(TRACES ALLOWED)

SEE NOTE 4

SEE NOTE 4

SEE NOTE 4

RECOMMENDED CENTRIX
OF LED

AREA OF LIGHT
PIPE COVERAGE

NOTES:


1. PADS AND VIAS GO TO CHASSIS GROUND. (34 PLACES). RECOMMENDED PADS TO BE 2mm SQUARE.
2. PLATING OPTIONAL FOR THROUGH HOLES. (12 PLACES).
3. RECOMMENDED PLATING INCLUDES HASL, IMMERSION (GOLD OR SILVER), AND OSP.
4. HOLE PATTERN REPEATS FOR EACH PORT. SPACING BETWEEN PORTS IS 5.61 [14.25].

ENTER DESCRIPTION EC NO: UST2006-0024 DRWN: JIMONSON 2005/11/05 CHKD: BRUSSELL 2005/11/09 APPR: BRUSSELL 2005/11/16	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 6:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± 0.13 ± .01 1 PLACE ± 0.25 ± --- ANGULAR ± 1 °	mm INCH	DRAWN BY KS IMONSO	DATE 2005/11/05	CHECKED BY BRUSSELL	DATE 2005/11/05	TITLE 1X4 SFP LIGHT PIPE COVER ASSEMBLY, LOW PROFILE	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO: 747280002		APPROVED BY BRUSSELL		DATE 2005/11/05	MOLEX INCORPORATED		SHEET NO. 3 OF 5
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									


20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

M
L
K
J
I
H
G
F
E
D
C
B
A

M
L
K
J
I
H
G
F
E
D
C
B
A

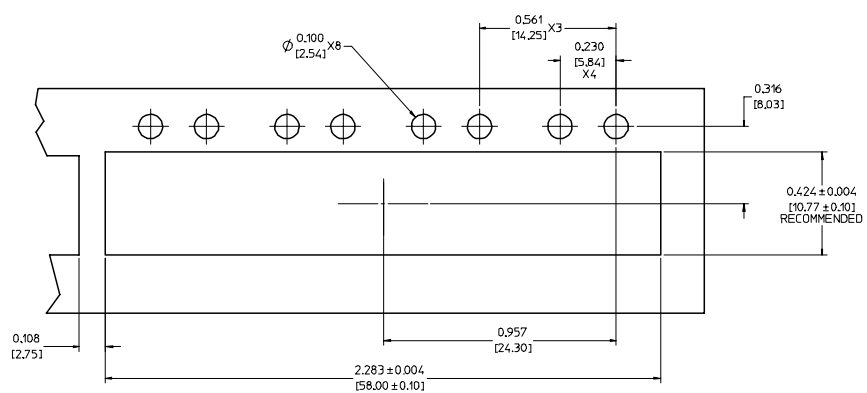


BEZEL AND BOARD POSITION DIMENSIONS FOR SINGLE SIDE MOUNTING

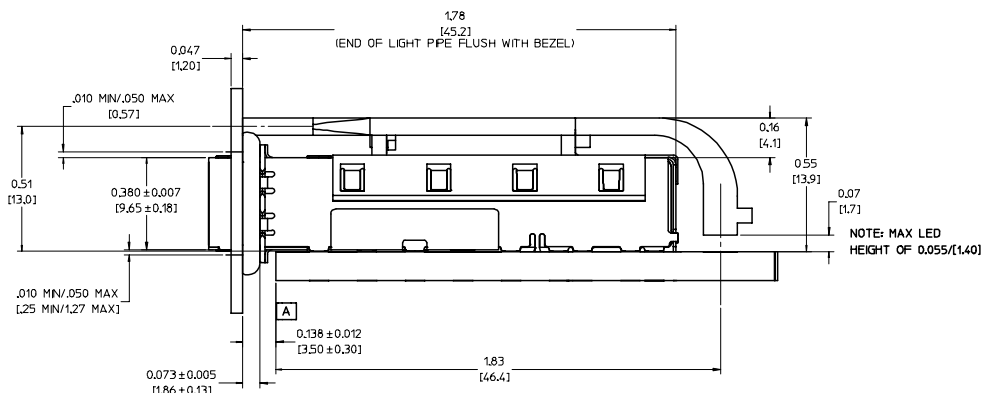

NOTE: MAX LED HEIGHT OF 0.055/[1.40]

BEZEL AND BOARD POSITION DIMENSIONS FOR BELLY TO BELLY MOUNTING

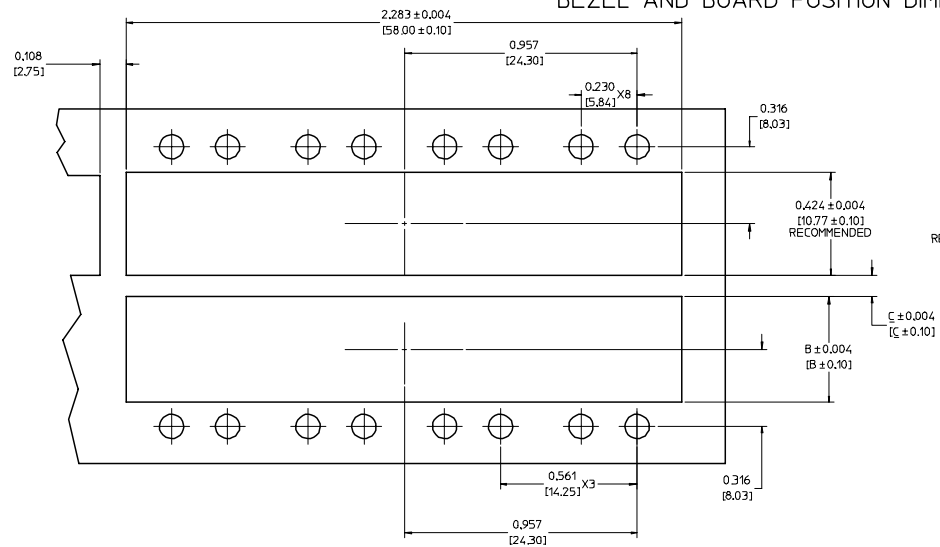


NOTE: FOR A GIVEN BOARD THICKNESS (A), DIMENSIONS (B) AND (C) ARE DIRECTLY AFFECTED.

USE RECOMMENDED DIMENSIONS AND TOLERANCES TO AID IN DEVELOPING BEZEL OPENING.

FOR EXAMPLE USING A BOARD THICKNESS OF .125" THE RECOMMENDED VALUES WOULD BE:

- A- .125/3.18 ± 10%
- B- .434/11.03 ± .004
- C- .088/2.23 ± .004

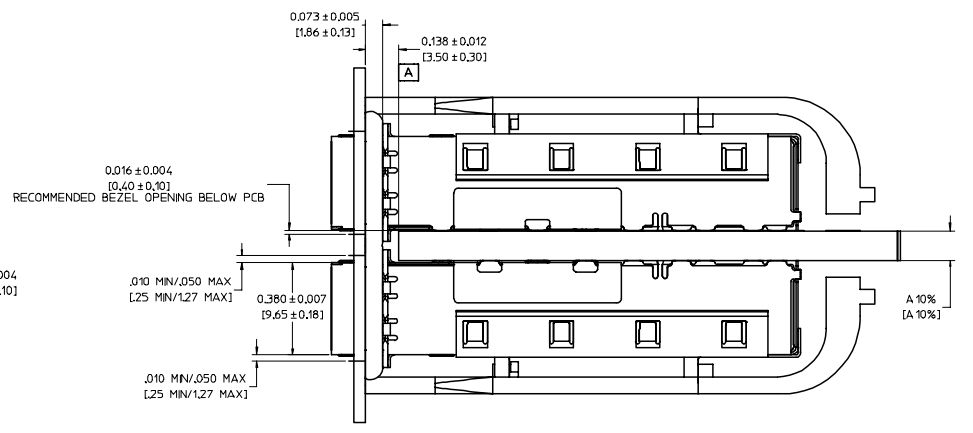

A 10% [A 10%]

ENTER DESCRIPTION EC NO: UST2006-0724 DRINKS MONSON 2005/11/05 CHFKBRUSSELL 2005/11/05 APPR:BRUSSELL 2005/11/16	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES ±</td> <td>---</td> <td>---</td> </tr> <tr> <td>3 PLACES ±</td> <td>---</td> <td>.005</td> </tr> <tr> <td>2 PLACES ±</td> <td>0.13</td> <td>.01</td> </tr> <tr> <td>1 PLACE ±</td> <td>0.25</td> <td>---</td> </tr> <tr> <td colspan="3">ANGULAR ± 1 °</td> </tr> </table>		mm	INCH	4 PLACES ±	---	---	3 PLACES ±	---	.005	2 PLACES ±	0.13	.01	1 PLACE ±	0.25	---	ANGULAR ± 1 °			DIMENSION STYLE IN/MM	SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
			mm	INCH																				
	4 PLACES ±	---	---																					
	3 PLACES ±	---	.005																					
2 PLACES ±	0.13	.01																						
1 PLACE ±	0.25	---																						
ANGULAR ± 1 °																								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY KS IMONSO 2005/11/05	DATE 2005/11/05	CHECKED BY BRUSSELL 2005/11/05	DATE 2005/11/05	TITLE 1X4 SFP LIGHT PIPE COVER ASSEMBLY, LOW PROFILE																			
	APPROVED BY BRUSSELL 2005/11/05	DATE 2005/11/05	MATERIAL NO. 747280002		MOLEX INCORPORATED																			
			DOCUMENT NO. SD-74728-002		SHEET NO. 4 OF 5																			

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

M

L

K

J

I

H

G

F

E

D

C

B

A

M

L

K

J

I

H

G

F

E

D

C

B

A

DATE	REV	CHANGES	COMMENTS
2005/11/05	A	INITIAL RELEASE	N/A

ENTER DESCRIPTION EC NO: UST2006-0124 DRAWN BY: DRANKS MONSON 2005/11/05 CHECKED BY: CHUCK BRUSSELL 2005/11/05 APPROVED BY: BRUSSELL 2005/11/16 A	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM	SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± 0.13 ± .01 1 PLACE ± 0.25 ± --- ANGULAR ± 1 °	DRAWN BY: KS IMONSO 2005/11/05 CHECKED BY: BRUSSELL 2005/11/05 APPROVED BY: BRUSSELL 2005/11/05	TITLE 1X4 SFP LIGHT PIPE COVER ASSEMBLY, LOW PROFILE			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO: 747280002	DOCUMENT NO: SD-74728-002	SHEET NO: 5 OF 5	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1