



STRIP MATERIAL NUMBER	FINISH
84524-0004	OVERALL NICKEL 80μ" MINIMUM
84524-0014	SELECTIVE HARD GOLD 30μ" MINIMUM OVER NICKEL 50μ" MINIMUM ALL OVER

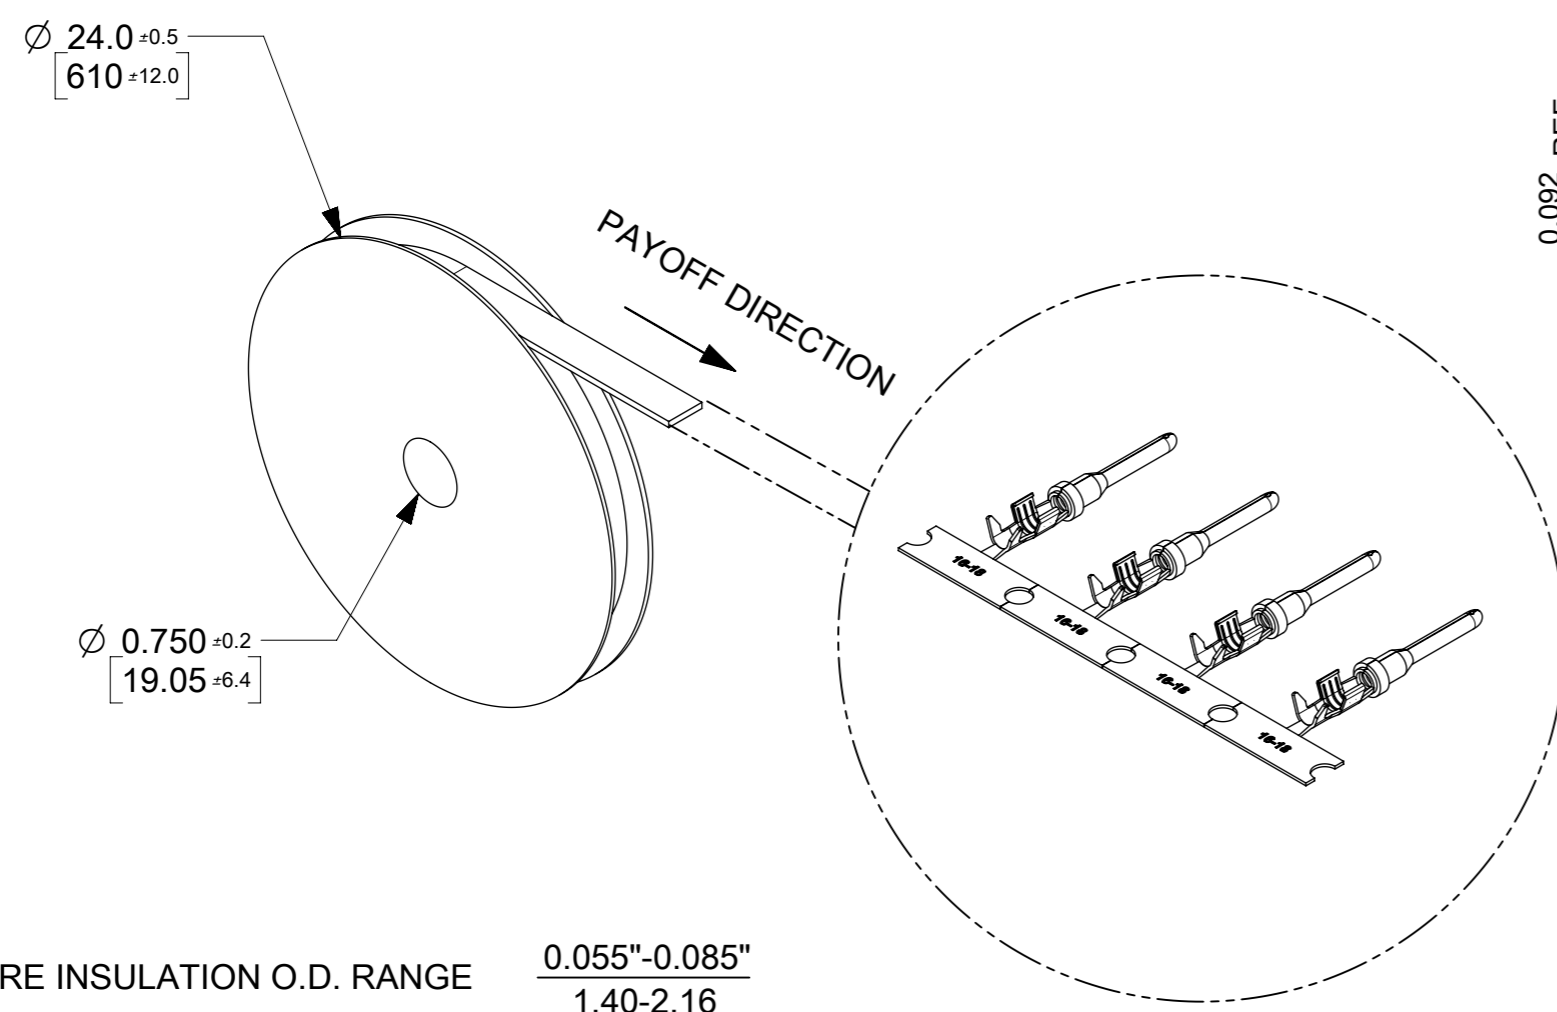

WIRE INSULATION O.D. RANGE $\frac{0.055"-0.085"}{1.40-2.16}$

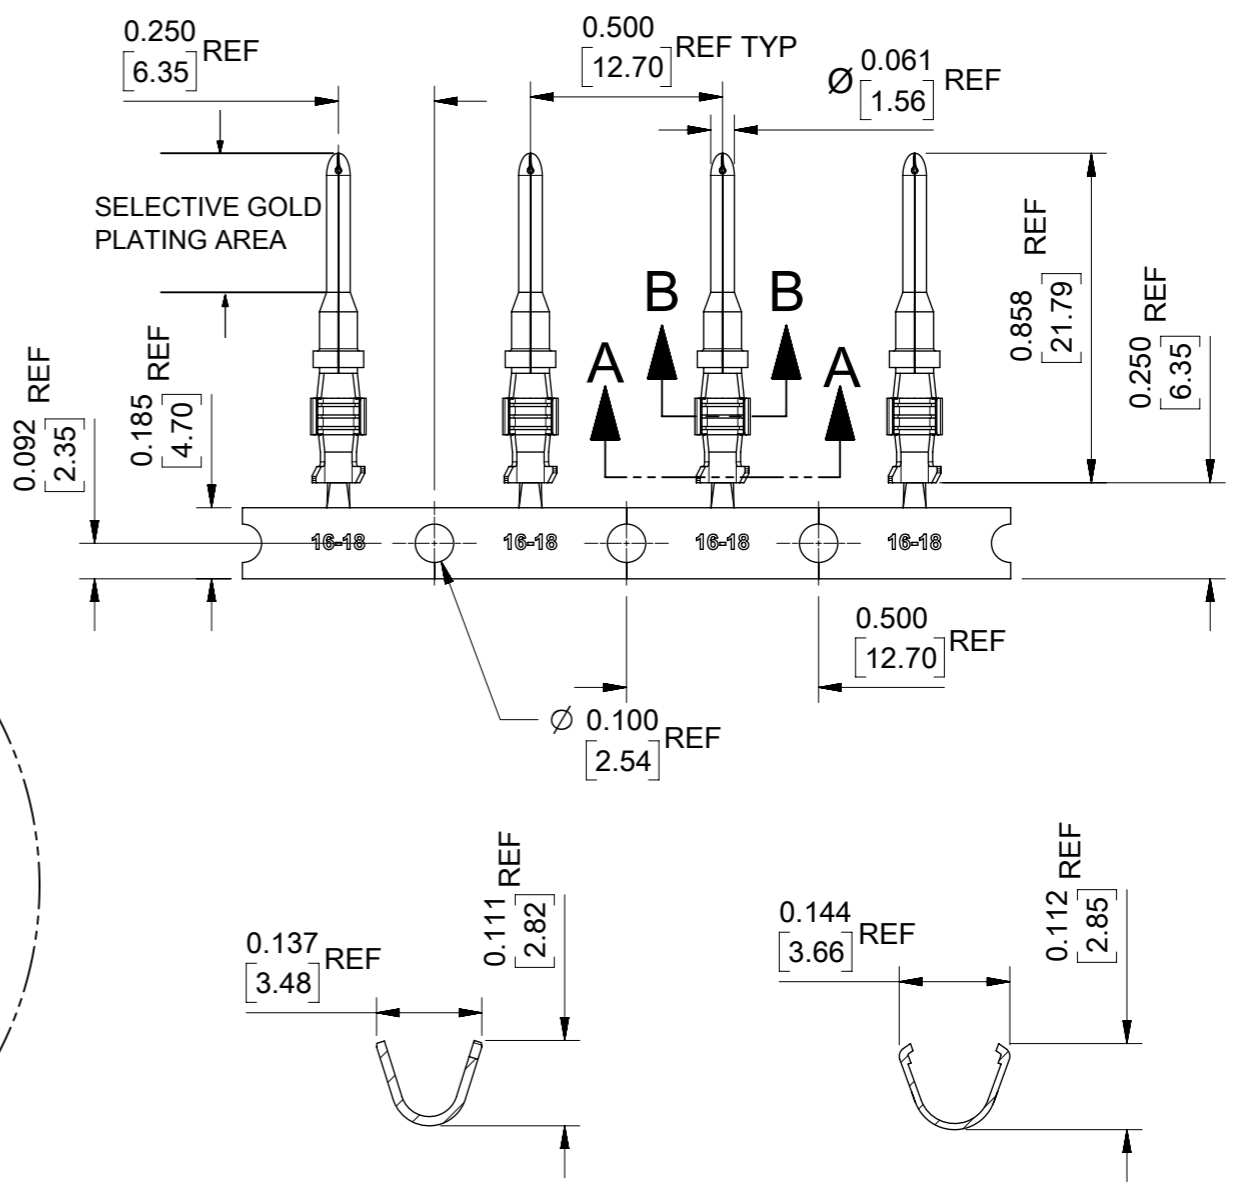

SECTION A-A
INSULATION CRIMP

SECTION B-B
CONDUCTOR CRIMP

- NOTES:
1. MATERIAL: COPPER ALLOY .0118/0.300 THICK.
 2. FINISH: SEE CHART.
 3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
 4. TERMINAL FOR USE ON XRC & ML-XT CONNECTOR ASSEMBLIES.
 5. TERMINALS COMPLY WITH SECTION 5.3.2 OF THE SAE J1939-11 STANDARD FOR SURFACE VEHICLE RECOMMENDED PRACTICE.

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: UPDATED PIN TIP			
	▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0	DIMENSION UNITS INCH/[mm]	SCALE 2:1	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 2.0° 4 PLACES ± 3 PLACES ± 2 PLACES ± 0.13 1 PLACE ± 0.2 0 PLACES ± DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		EC NO: 168799 DRWN: JFLETCHER 2017/11/21 CHK'D: JDWALLACE 2018/02/12 APPR: JDWALLACE 2018/02/20 INITIAL REVISION: DRWN: JFLETCHER 2016/01/25 APPR: JALEXANDER 2016/02/23
PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER: 845240010 DOC TYPE: PSD DOC PART: 000 REVISION: B					SHEET NUMBER 1 OF 1	