


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [87616-1001](#)
Status: **Active**
Overview: EXTreme PowerPlus™ (SSI)
Description: 6.35mm Pitch, Power, 2.54mm Pitch, Signal, EXTreme PowerPlus™ (SSI) MPS Receptacle, Through Hole, Right Angle, 0.76µm Gold (Au) Plating, 35 Circuits, Power Beta 6, Signal 24, Power Alpha 5, Lead-Free

Documents:

[3D Model](#) [Application Specification AS-87631-018 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-87615-005 \(PDF\)](#)

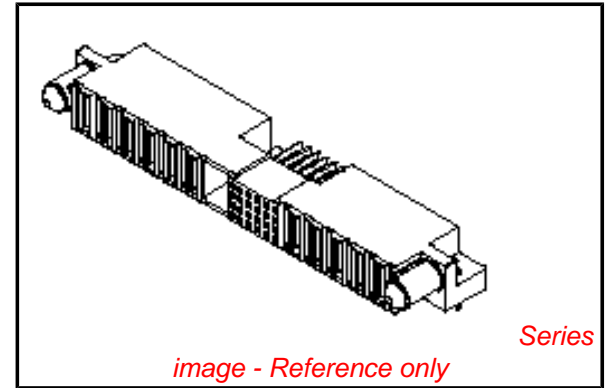

General

Product Family	PCB Receptacles
Series	87616
Application	Board-to-Board, Power
Overview	<u>EXTreme PowerPlus™ (SSI)</u>
Product Name	EXTreme PowerPlus™
UPC	822348525904

Physical

(p)ower-(s)ignal Configuration	6p - 24s - 5p
Circuits (Loaded)	35
Circuits (maximum)	35
Color - Resin	Black
Durability (mating cycles max)	100
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Lock to Mating Part	None
Material - Metal	High Performance Alloy (HPA), Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	35.363/g
Number of Rows	4
Orientation	Right Angle
PC Tail Length	3.43mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	2.40mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm, 6.35mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-20°C to +70°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	2.5A, 30A
Voltage - Maximum	50V DC

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
--	----

EU RoHS

ELV and RoHS Compliant
REACH SVHC Contains SVHC: No
Low-Halogen Status Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

87616Series

Mates With

87615 EXTreme PowerPlus™ (SSI) MPS Header

Lead-free Process Capability	SMC & Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Application Specification	AS-87631-018
Product Specification	PS-87615-005
Sales Drawing	SD-87616-011

This document was generated on 10/11/2012

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION