




7 6 5 4 3 2 1

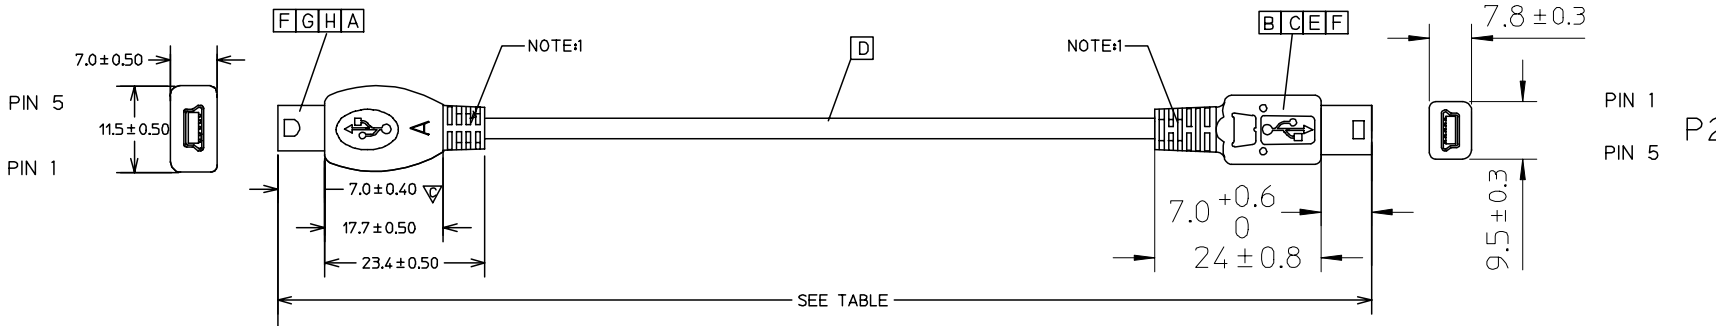

NOTE:

- PHYSICAL
- MOLDED WITH PVC RESIN (SEE TABLE)
 - ANY SURFACE ON MINI A SIDE CAN HAVE TEXTURING UP TO 0.3mm ABOVE OR BELOW THE SURFACE;
 - A CIRCULAR AREA AROUND THE LETTER "A" CAN BE RAISED OR LOWERED AS MUCH AS 0.5mm ABOVE THE SURFACE;
 - STICK UL LABEL ON EACH CARTON.
- ELECTRICAL PERFORMANCE:
- ALL TEST DUABILITY:0.01 SEC.
 1. DIELECTRONIC STRENGTH:500V DC
 2. INSULATION RESISTANCE:100M OHMS
 3. CONDUCTIVE RESISTANCE:3 OHMS
 - 6.ALL COMPOUNT MUST MEET RoHS COMPLIANCE.

SHELL	SHELL	SHIELDING	BRAID WIRE	ITEM	DESCRIPTION	L	QTY.
4 & 5	5	GROUND	BLACK	H	MINI A PLUG REAR SHELL 87899020		1
3	3	+DATA	GREEN	G	MINI A PLUG FRONT SHELL 887899019		1
2	2	-DATA	WHITE	F	COPPER FOIL 887801114		2
1	1	VCC	RED	E	USB SERIES MINI-B PLUG COVER SHIELD 675460000		1
P 1	P 2	SIGNAL NAME	WIRE COLOR	D	USB CABLE #28/#24 (SEE TABLE)		
				C	USB SERIES MINI-B PLUG SHIELD CASE 675450000		1
				B	MINI-B PLUG 675420008		1
				A	MINI A PLUG HOUSING 887899018		1

ENTER DESCRIPTION EC NO: DG2008-0027 DRWN: JFZHENG CHKD: APPR: BLAU	QUALITY SYMBOLS ▽=0 ▽=2	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		4 PLACES ± --- ± ---	mm INCH	DRAWN BY JFZHENG	DATE 2006/01/04	TITLE USB MINIA TO MINIB CABLE ASS'Y				
		3 PLACES ± --- ± ---		CHECKED BY JFZHENG	DATE 2006/01/04	Molex MOLEX INCORPORATED				
		2 PLACES ± --- ± ---		APPROVED BY HXIE	DATE 2006/01/04	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-887538100	SHEET NO. 1 OF 2		
1 PLACE ± --- ± ---		ANGULAR ±1/2°		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										

6 5 4 3 2 1

7 6 5 4 3 2 1

TABLE

88753-8610	2000±30	USB MINI-A TO MINI-B FROST WHT V1.1	88780-8249	88780-0043
88753-8510	1800±30	USB MINI-A TO MINI-B FROST WHT V1.1	88780-8249	88780-0043
88753-8410	1500±30	USB MINI-A TO MINI-B FROST WHT V1.1	88780-8249	88780-0043
88753-8310	1200±30	USB MINI-A TO MINI-B FROST WHT V1.1	88780-8249	88780-0043
88753-8210	1000±30	USB MINI-A TO MINI-B FROST WHT V1.1	88780-8249	88780-0043
88753-8110	800±30	USB MINI-A TO MINI-B FROST WHT V1.1	88780-8249	88780-0043
88753-8602	2000±30	USB MINI-A TO MINI-B BLACK V2.0	88780-8248	88780-0019
88753-8502	1800±30	USB MINI-A TO MINI-B BLACK V2.0	88780-8248	88780-0019
88753-8402	1500±30	USB MINI-A TO MINI-B BLACK V2.0	88780-8248	88780-0019
88753-8302	1200±30	USB MINI-A TO MINI-B BLACK V2.0	88780-8248	88780-0019
88753-8202	1000±30	USB MINI-A TO MINI-B BLACK V2.0	88780-8248	88780-0019
88753-8102	800±30	USB MINI-A TO MINI-B BLACK V2.0	88780-8248	88780-0019
88753-8600	2000±30	USB MINI-A TO MINI-B FROST WHT V2.0	88780-8243	88780-0043
88753-8500	1800±30	USB MINI-A TO MINI-B FROST WHT V2.0	88780-8243	88780-0043
88753-8400	1500±30	USB MINI-A TO MINI-B FROST WHT V2.0	88780-8243	88780-0043
88753-8300	1200±30	USB MINI-A TO MINI-B FROST WHT V2.0	88780-8243	88780-0043
88753-8200	1000±30	USB MINI-A TO MINI-B FROST WHT V2.0	88780-8243	88780-0043
88753-8100	800±30	USB MINI-A TO MINI-B FROST WHT V2.0	88780-8243	88780-0043
MX P/N	CABLE LENGTH	DESCRIPTION	CABLE P/N	RESIN P/N

ENTER DESCRIPTION EC NO: DG2008-0027 DRWN: JFZHENG CHKD: APPR: BLAU	2007/10/22 2007/10/24 2007/10/24	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			mm INCH	DRAWN BY JFZHENG	DATE 2006/01/04	TITLE USB MINIA TO MINIB CABLE ASS'Y					
			4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± ---	CHECKED BY JFZHENG	DATE 2006/01/04	APPROVED BY HXIE					
			ANGULAR ±1/2°	MATERIAL NO. SEE TABLE	DATE 2006/01/04	MOLEX INCORPORATED		DOCUMENT NO. SD-887538100	SHEET NO. 2 OF 2		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

6 5 4 3 2 1