

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0917161008**
Status: **Active**
Overview: RAST 2.5 Connector System
Description: 2.50mm Pitch Appli-Mate RAST 2.5 IDT Housing, Direct/Indirect, Female, 5 Circuits, Polarizing Rib Between Circuits 2 & 3

Documents:

3D Model	Application Specification AS-99033-0008-001 (PDF)
Drawing (PDF)	Packaging Specification PK-90871-001-001 (PDF)
Product Specification PS-99020-0040-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179


General

Product Family	IDT and Solder Connectors
Series	<u>91716</u>
Comments	""This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.""

Crimp Quality Equipment	Yes
Overview	<u>RAST 2.5 Connector System</u>
Product Name	RAST 2.5
UPC	822348367917
Use With	RAST standard interface

Physical

Circuits (Loaded)	5
Circuits (maximum)	5
Color - Resin	Natural (White)
Durability (mating cycles max)	10
Flammability	94V-0
Gender	Female
Glow-Wire Capable	No
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Net Weight	1.325/g
Number of Rows	1

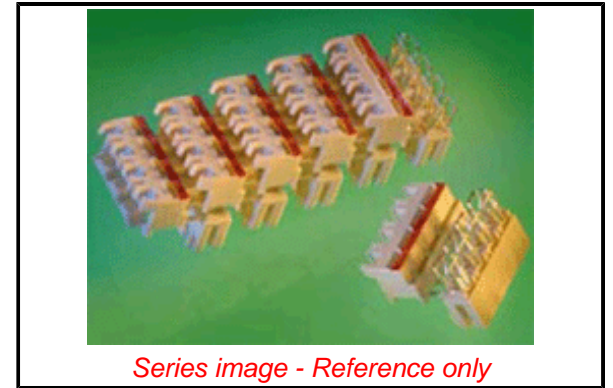

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

91716 Series

Mates With

Appli-Mate RAST 2.5 Header 90861 , 90860

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

RAST 2.5 Semi-Automatic Terminator Machine Hand Tool for Appli-Mate RAST2.5, RAST Signal, and R-Power Connectors	<u>623006200</u>
	<u>638272900</u>

Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface	2.50mm
Pitch - Termination Interface	2.50mm
Plating min - Mating	1.016µm
Plating min - Termination	1.016µm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-20° to +120°C
Termination Interface: Style	IDT or Pierce
Wire Size AWG	22, 24

Electrical

Current - Maximum per Contact	2.0A, 4.0A
Voltage - Maximum	32V AC

Solder Process Data

Lead-free Process Capability	N/A
------------------------------	-----

Material Info**Reference - Drawing Numbers**

Application Specification	AS-99033-0008-001
Packaging Specification	PK-90871-001-001
Product Specification	PS-99020-0040-001
Sales Drawing	917160001-000

This document was generated on 11/27/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION