

Distributed by:

**JAMECO**<sup>®</sup>  
ELECTRONICS


**www.Jameco.com ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 1961031

# 3.96mm (.156") Pitch KK<sup>®</sup> Crimp Terminal Housing

41695

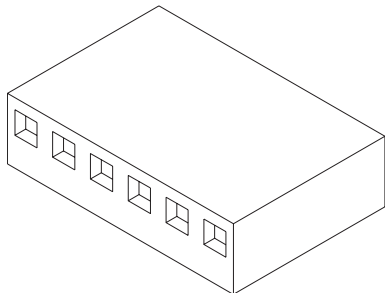

### Features and Benefits

- Sizes 2 to 20 circuits
- Locking ramp feature available
- Polarizing rib feature available for side-to-side polarization
- Offset pin entry holes provide 180° polarization
- Accepts entire line of .156" contacts
- Optional voids available

### Reference Information

Product Specification: PS-08-50  
 Packaging: Bag  
 UL File No.: E29179  
 CSA File No.: LR19980  
 Mates With: Molex KK 3.96mm (.156") pitch headers or 1.14mm (.045") pins  
 Use With: 2478, 2578, 6838 and 7258 terminals  
 Designed In: Inches

### Electrical

Voltage: 250V AC max.  
 Current: Phosphor Bronze—7.0A max.  
           Brass—5.0A max.  
 Dielectric Withstanding Voltage: 1500V AC  
 Insulation Resistance: 500K Megohms min.

### Mechanical

Contact Insertion Force: 1.8kg (4 lb) max.  
 Contact Retention to Housing: 3.6kg (8 lb) min.  
 Mating Force: Square pin—2.25 lb max.  
                   Round pin—1.60 lb max.  
 Unmating Force: Square pin—0.84 lb min.  
                   Round pin—0.60 lb min.  
 Normal Force: 0.75kg (1.65 lb)  
 Durability: 25 cycles max.

### Physical

Housing: Polyester, UL 94V-0  
 Operating Temperature: 0 to +75°C

Circuits	Order No.		
	With Locking Ramp and Polarizing Ribs	Without Locking Ramp or Polarizing Ribs	With Locking Ramp Only
2	<a href="#">09-50-8023</a>	<a href="#">09-50-8020</a>	<a href="#">09-50-8021</a>
3	<a href="#">09-50-8033</a>	<a href="#">09-50-8030</a>	<a href="#">09-50-8031</a>
4	<a href="#">09-50-8043</a>	<a href="#">09-50-8040</a>	<a href="#">09-50-8041</a>
5	<a href="#">09-50-8053</a>	<a href="#">09-50-8050</a>	<a href="#">09-50-8051</a>
6	<a href="#">09-50-8063</a>	<a href="#">09-50-8060</a>	<a href="#">09-50-8061</a>
7	<a href="#">09-50-8073</a>	<a href="#">09-50-8070</a>	<a href="#">09-50-8071</a>
8	<a href="#">09-50-8083</a>	<a href="#">09-50-8080</a>	<a href="#">09-50-8081</a>
9	<a href="#">09-50-8093</a>	<a href="#">09-50-8090</a>	<a href="#">09-50-8091</a>
10	<a href="#">09-50-8103</a>	<a href="#">09-50-8100</a>	<a href="#">09-50-8101</a>
11	<a href="#">09-50-8113</a>	<a href="#">09-50-8110</a>	<a href="#">09-50-8111</a>


Note: When mating polarizing rib version with breakaway friction lock header or polarizing wall series, the end friction lock or polarizing wall of header must be removed.

Circuits	Order No.		
	With Locking Ramp and Polarizing Ribs	Without Locking Ramp or Polarizing Ribs	With Locking Ramp Only
12	<a href="#">09-50-8123</a>	<a href="#">09-50-8120</a>	<a href="#">09-50-8121</a>
13	<a href="#">09-50-8133</a>	<a href="#">09-50-8130</a>	<a href="#">09-50-8131</a>
14	<a href="#">09-50-8143</a>	<a href="#">09-50-8140</a>	<a href="#">09-50-8141</a>
15	<a href="#">09-50-8153</a>	<a href="#">09-50-8150</a>	<a href="#">09-50-8151</a>
16	<a href="#">09-50-8163</a>	<a href="#">09-50-8160</a>	<a href="#">09-50-8161</a>
17	<a href="#">09-50-8173</a>	<a href="#">09-50-8170</a>	<a href="#">09-50-8171</a>
18	<a href="#">09-50-8183</a>	<a href="#">09-50-8180</a>	<a href="#">09-50-8181</a>
19	<a href="#">09-50-8193</a>	<a href="#">09-50-8190</a>	<a href="#">09-50-8191</a>
20	<a href="#">09-50-8203</a>	<a href="#">09-50-8200</a>	<a href="#">09-50-8201</a>

	Order No.
Polarizing Key	<a href="#">15-04-0297</a>

# 3.96mm (.156") Pitch KK<sup>®</sup> Crimp Terminal Housing

2139

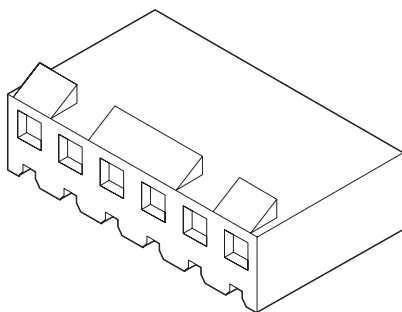

### Features and Benefits

- Sizes 2 to 24 circuits
- Locking ramp available
- Molded void options available
- Standard ramp options available
- Polarizing pegs and keys available
- End-to-end stackable

### Reference Information

Product Specification: PS-08-50  
 Packaging: Bag  
 UL File No.: E29179  
 CSA File No.: LR19980  
 Mates With: Molex KK 3.96mm (.156") pitch headers or 1.14mm (.045") pins  
 Use With: 2478 and 2578  
 Designed In: Inches

### Electrical

Voltage: 250V AC max.  
 Current: Phosphor Bronze—7.0A max.  
           Brass—5.0A max.  
 Dielectric Withstanding Voltage: 1500V AC  
 Insulation Resistance: 50K Megohms min.

### Mechanical

Contact Insertion Force: 1.8kg (4 lb) max.  
 Contact Retention to Housing: 3.6kg (8 lb) min.  
 Mating Force: Square pin—2.25 lb max.  
                   Round pin—1.60 lb max.  
 Unmating Force: Square pin—0.84 lb min.  
                   Round pin—0.60 lb min.  
 Normal Force: 0.75kg (1.65 lb)

### Physical

Housing: Nylon, UL 94V-2 (see 41695 for UL 94V-0 polyester)  
 Operating Temperature: 0 to +75°C

Circuits	Order No.	
	Without Locking Ramp	With Locking Ramp
2	<a href="#">09-50-7021</a>	<a href="#">09-50-3021</a>
3	<a href="#">09-50-7031</a>	<a href="#">09-50-3031</a>
4	<a href="#">09-50-7041</a>	<a href="#">09-50-3041</a>
5	<a href="#">09-50-7051</a>	<a href="#">09-50-3051</a>
6	<a href="#">09-50-7061</a>	<a href="#">09-50-3061</a>
7	<a href="#">09-50-7071</a>	<a href="#">09-50-3071</a>
8	<a href="#">09-50-7081</a>	<a href="#">09-50-3081</a>
9	<a href="#">09-50-7091</a>	<a href="#">09-50-3091</a>

Circuits	Order No.	
	Without Locking Ramp	With Locking Ramp
10	<a href="#">09-50-7101</a>	<a href="#">09-50-3101</a>
11	<a href="#">09-50-7111</a>	<a href="#">09-50-3111</a>
12	<a href="#">09-50-7121</a>	<a href="#">09-50-3121</a>
13	<a href="#">09-50-7131</a>	<a href="#">09-50-3131</a>
14	<a href="#">09-50-7141</a>	<a href="#">09-50-3141</a>
15	<a href="#">09-50-7151</a>	<a href="#">09-50-3151</a>
16	<a href="#">09-50-7161</a>	<a href="#">09-50-3161</a>
17	<a href="#">09-50-7171</a>	<a href="#">09-50-3171</a>

Circuits	Order No.	
	Without Locking Ramp	With Locking Ramp
18	<a href="#">09-50-7181</a>	<a href="#">09-50-3181</a>
19	<a href="#">09-50-7191</a>	<a href="#">09-50-3191</a>
20	<a href="#">09-50-7201</a>	<a href="#">09-50-3201</a>
21	<a href="#">09-50-7211</a>	<a href="#">09-50-3211</a>
22	<a href="#">09-50-7221</a>	<a href="#">09-50-3221</a>
23	<a href="#">09-50-7231</a>	<a href="#">09-50-3231</a>
24	<a href="#">09-50-7241</a>	<a href="#">09-50-3241</a>

	Order No.
Polarizing Key	<a href="#">15-04-0219</a>
Polarizing Peg	<a href="#">15-04-0220</a>

Note: Use 41695 for .100" and over insulation diameter wire



# PRODUCT SPECIFICATION

## 1.0 SCOPE

This Product Specification covers the 3.96 mm (.156 inch) centerline (pitch) 1.14mm (.045) square pin headers when mated with either printed circuit board (PCB) connectors or connectors terminated with 18 to 26 AWG wire using crimp technology.

## 2.0 PRODUCT DESCRIPTION

### 2.1 PRODUCT NAME AND SERIES NUMBERS

Crimp Terminals: 2478,2578,2878,2477,

Crimp Housings: 2139, 41695

PCB Connectors: 2145, 41815

Headers: 41771, 41772, 41791, 41792, 42471, 42472, 42491, 42492, 41661, 41662, 41671, 61672, 41681, 41682

Other products conforming to this specification are noted on the individual drawings.

### 2.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKINGS

Terminal Material: Brass or Phos. Bronze (for Max performance use phos bronze material.)

Housing: Nylon or Polyester

Pins: Brass or Phos. Bronze

For more information on dimensions, materials, and plating see the individual drawings.

### 2.3 SAFETY AGENCY APPROVALS

UL File Number ..... E29179

CSA .....LR19980

## 3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

3.1 PS-45499-002 COSMETIC SPECIFICATION

## 4.0 RATINGS

### 4.1 VOLTAGE

250 Volts

**4.2 CURRENT** (Current is dependent on connector size, contact material, plating, ambient temperature, printed circuit board characteristics and related factors. Actual current rating is application dependent and should be evaluated for each application.)

#### a. For Crimp Terminals- and Applicable Wires

Wire Awg	Amps (Max) With Brass	Amps (Max) With Phos Bronze	Wire Insulation Dia
18	5.00	7.00	See terminal drawings
20	4.75	6.25	See terminal drawings
22	4.50	5.50	See terminal drawings
24	4.25	5.00	See terminal drawings
26	4.00	4.50	See terminal drawings

<b>REVISION:</b> <b>R3</b>	<b>ECR/ECN INFORMATION:</b> EC No: <b>UCP2008-1760</b> DATE: <b>2008/01/30</b>	<b>TITLE:</b> <b>PRODUCT SPECIFICATION</b> <b>.156 CENTER KK CONNECTORS</b>	<b>SHEET No.</b> <b>1 of 5</b>
<b>DOCUMENT NUMBER:</b> <b>PS-08-50</b>	<b>CREATED / REVISED BY:</b> <b>ADERR</b>	<b>CHECKED BY:</b> <b>JBELL</b>	<b>APPROVED BY:</b> <b>FSMITH</b>



# PRODUCT SPECIFICATION

## 4.2 CURRENT (cont)

### b. For Printed Circuit Board Connectors

Connector Style	Amps (Max) With Brass	Amps (Max) With Phos Bronze
Top Entry	4.50	5.00
Right Angle	4.50	5.00
Bottom Entry	4.00	4.50

## 4.3 TEMPERATURE (ambient + 30°C temp rise)

	Brass	Phos Bronze
Operating Temperature	0°C to +50°C	0°C to +75°C
Non Operating Temperature	-40°C to +105°C	-40°C to +105°C

## 5.0 PERFORMANCE

### 5.1 ELECTRICAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
Contact Resistance (Low Level)	Mate connectors: apply a maximum voltage of 20 mV and a current of 100 mA.	10 milliohms MAXIMUM [initial]
Contact Resistance of Wire Termination (Low Level)	Terminate the applicable wire to the terminal and measure wire using a voltage of 20 mV and a current of 100 mA.	2 milliohms MAXIMUM [initial]
Insulation Resistance	Unmate & unmount connectors: apply a voltage of 500 VDC between adjacent terminals and between terminals to ground.	1000 Megohms MINIMUM
Dielectric Withstanding Voltage	Unmate connectors: apply a voltage of {two times the rated voltage plus 1000 volts} VAC for 1 minute between adjacent terminals and between terminals to ground.	No breakdown
Capacitance	Measure between adjacent terminals at 1 MHz.	1.2 picofarads MAXIMUM
Temperature Rise (via Current Cycling)	Mate connectors: measure the temperature rise at the rated current after: 1) 96 hours (steady state) 2) 240 hours (45 minutes ON and 15 minutes OFF per hour) 3) 96 hours (steady state)	Temperature rise: +30°C MAXIMUM

REVISION: <b>R3</b>	ECR/ECN INFORMATION: EC No: <b>UCP2008-1760</b> DATE: <b>2008/01/30</b>	TITLE: <b>PRODUCT SPECIFICATION .156 CENTER KK CONNECTORS</b>	SHEET No. <b>2 of 5</b>
DOCUMENT NUMBER: <b>PS-08-50</b>	CREATED / REVISED BY: <b>ADERR</b>	CHECKED BY: <b>JBELL</b>	APPROVED BY: <b>FSMITH</b>



# PRODUCT SPECIFICATION

## 5.2 MECHANICAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
Connector Mate and Unmate Forces	Per circuit when mated to a .045 Sq. pin. Mate and unmate connector (male to female) at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	<u>Without Friction Lock</u>  9.4 N (2.12 lbf) MAXIMUM insertion force & 1.8 N (0.40 lbf) MINIMUM withdrawal force
		<u>With Friction Lock</u>  10.7 N (2.40 lbf) MAXIMUM insertion force & 4.0 N (0.90 lbf) MINIMUM withdrawal force
Terminal Insertion Force (into Housing)	Apply an axial insertion force on the terminal at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute. (Forces will change with platings and materials.)	17.8 N (4.0 lbf) MAXIMUM insertion force
Terminal Retention Force (in Housing)	Axial pullout force on the terminal in the housing at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute. (Forces will change with platings and materials.)	35.6 N (8.0 lbf) MINIMUM withdrawal force
Durability	Mate connectors up to 25 cycles at a maximum rate of 10 cycles per minute prior to Environmental Tests.	10 milliohms MAXIMUM (change from initial)
Vibration (Random)	Mate connectors and vibrate per EIA 364-28, test condition VII.	10 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond
Shock (Mechanical)	Mate connectors and shock at 50 g's with ½ sine wave (11 milliseconds) shocks in the ±X,±Y,±Z axes (18 shocks total).	10 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond
Wire Pullout Force (Axial)	Apply an axial pullout force on the wire at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute. (For maximum performance use Molex application tooling with stranded tinned copper wire)	18 awg = 89 N (20 lbf) 20 awg = 66 N (15 lbf) 22 awg = 53 N (12 lbf) 24 awg = 35 N (8 lbf) 26 awg = 22 N (5 lbf)
Normal Force	Apply a perpendicular force.	7.34 N (748 grams) average

REVISION: <b>R3</b>	ECR/ECN INFORMATION: EC No: <b>UCP2008-1760</b> DATE: <b>2008/01/30</b>	TITLE: <b>PRODUCT SPECIFICATION .156 CENTER KK CONNECTORS</b>	SHEET No. <b>3 of 5</b>
DOCUMENT NUMBER: <b>PS-08-50</b>	CREATED / REVISED BY: <b>ADERR</b>	CHECKED BY: <b>JBELL</b>	APPROVED BY: <b>FSMITH</b>



# PRODUCT SPECIFICATION

## 5.3 ENVIRONMENTAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT										
Shock (Thermal)	Mate connectors; expose to 5 cycles of: <table border="1"> <thead> <tr> <th>Temperature °C</th> <th>Duration (Minutes)</th> </tr> </thead> <tbody> <tr> <td>-40 +0/-3</td> <td>30</td> </tr> <tr> <td>+25 ±10</td> <td>5 MAXIMUM</td> </tr> <tr> <td>+105 +3/-0</td> <td>30</td> </tr> <tr> <td>+25 ±10</td> <td>5 MAXIMUM</td> </tr> </tbody> </table>	Temperature °C	Duration (Minutes)	-40 +0/-3	30	+25 ±10	5 MAXIMUM	+105 +3/-0	30	+25 ±10	5 MAXIMUM	10 milliohms MAXIMUM (change from initial) & Visual: No Damage
Temperature °C	Duration (Minutes)											
-40 +0/-3	30											
+25 ±10	5 MAXIMUM											
+105 +3/-0	30											
+25 ±10	5 MAXIMUM											
Thermal Aging	Mate connectors; expose to: 96 hours at 105 ± 2°C	10 milliohms MAXIMUM (change from initial]) & Visual: No Damage										
Humidity (Steady State)	Mate connectors: expose to a temperature of 40 ± 2°C with a relative humidity of 90-95% for 96 hours.  Note: Remove surface moisture and air dry for 1 hour prior to measurements.	10 milliohms MAXIMUM (change from initial) & Dielectric Withstanding Voltage: No Breakdown at 500 VAC & Insulation Resistance: 1000 Megohms MINIMUM & Visual: No Damage										
Humidity (Cyclic)	Mate connectors: cycle per EIA-364-31: 24 cycles at temperature 25 ± 3°C at 80 ± 5% relative humidity and 65 ± 3°C at 50 ± 5% relative humidity; dwell time of 1.0 hour; ramp time of 0.5 hours.  {Note: Remove surface moisture and air dry for 1 hour prior to measurements.}	10 milliohms MAXIMUM (change from initial) & Dielectric Withstanding Voltage: No Breakdown at 500 VAC & Insulation Resistance: 1000 Megohms MINIMUM & Visual: No Damage										
Solderability	Per SMES-152	Solder coverage: 95% MINIMUM (per SMES-152)										

REVISION: <b>R3</b>	ECR/ECN INFORMATION: EC No: <b>UCP2008-1760</b> DATE: <b>2008/01/30</b>	TITLE: <b>PRODUCT SPECIFICATION .156 CENTER KK CONNECTORS</b>	SHEET No. <b>4 of 5</b>
DOCUMENT NUMBER: <b>PS-08-50</b>	CREATED / REVISED BY: <b>ADERR</b>	CHECKED BY: <b>JBELL</b>	APPROVED BY: <b>FSMITH</b>



# PRODUCT SPECIFICATION

## 5.3 ENVIRONMENTAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
Solder Resistance	Dip connector terminal tails in solder: Solder Duration: 5 ± 0.5 seconds; Solder Temperature: 230 ± 5°C	Visual: No Damage to insulator material
Cold Resistance	Mate connectors: Duration: 96 hours; Temperature: -40 ± 3°C	10 milliohms MAXIMUM (change from initial) & Visual: No Damage
Corrosive Atmosphere: Flowing Mixed Gas (FMG)	Mate connectors: Test per EIA-364-65, method 2A	10 milliohms MAXIMUM (change from initial) & Visual: No Damage




## 6.0 PACKAGING

Parts shall be packaged to protect against damage during handling, transit and storage.

## 7.0 GAGES AND FIXTURES

## 8.0 OTHER

REVISION: <b>R3</b>	ECR/ECN INFORMATION: EC No: <b>UCP2008-1760</b> DATE: <b>2008/01/30</b>	TITLE: <b>PRODUCT SPECIFICATION .156 CENTER KK CONNECTORS</b>	SHEET No. <b>5 of 5</b>
DOCUMENT NUMBER: <b>PS-08-50</b>	CREATED / REVISED BY: <b>ADERR</b>	CHECKED BY: <b>JBELL</b>	APPROVED BY: <b>FSMITH</b>

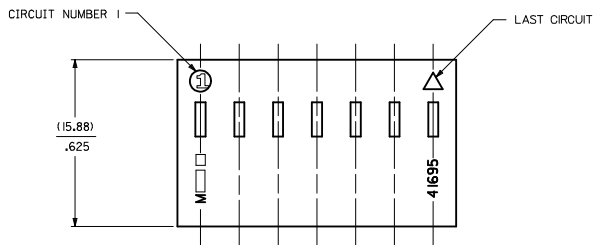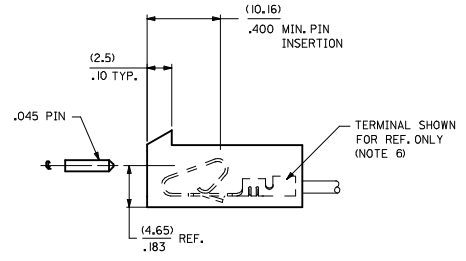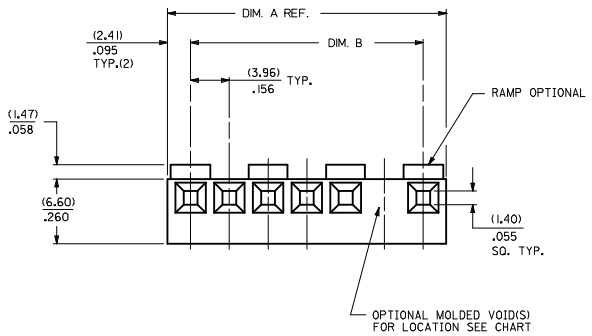

NO. OF CKTS	DIM. A	DIM. B
1	NOT AVAILABLE	
2	(8.79) .346	(3.96±.05) .156±.002
3	(12.75) .502	(7.92±.08) .312±.003
4	(16.71) .658	(11.89±.08) .468±.003
5	(20.67) .814	(15.85±.08) .624±.003
6	(24.64) .970	(19.81±.10) .780±.004
7	(28.60) 1.126	(23.77±.10) .936±.004
8	(32.56) 1.282	(27.74±.10) 1.092±.004
9	(36.53) 1.438	(31.70±.10) 1.248±.004
10	(40.49) 1.594	(35.66±.15) 1.404±.006
11	(44.45) 1.750	(39.62±.15) 1.560±.006
12	(48.41) 1.906	(43.59±.15) 1.716±.006
13	(52.37) 2.062	(47.55±.15) 1.872±.006
14	(56.34) 2.218	(51.51±.18) 2.028±.007
15	(60.30) 2.374	(55.47±.18) 2.184±.007
16	(64.26) 2.530	(59.44±.20) 2.340±.008
17	(68.22) 2.686	(63.40±.20) 2.496±.008
18	(72.19) 2.842	(67.36±.23) 2.652±.009
19	(76.15) 2.998	(71.32±.23) 2.808±.009
20	(80.11) 3.154	(75.28±.23) 2.964±.009

41695 - \* - \* N - ###

MATERIAL CODE  
 N=MOLDED NATURAL  
 B=BLACK  
 G=GLOW WIRE

VOID CODE  
 BLANK=NO VOIDS  
 NO.=NO. CORRESPONDS TO CKT. NO. VOIDED  
 MULT. VOIDS=START WITH 51  
 NO. OF CKTS.

- NOTES:
- MATERIAL: N - GLASS FILLED POLYESTER, UL94V-0, MOLDED NATURAL  
 B - GLASS FILLED POLYESTER, UL94V-0, MOLDED BLACK  
 G - UL94V-0 PA6 NYLON, IEC 60335-1, 4th EDITION GLOW WIRE CAPABLE, COLOR: BLACK
  - FINISH: SEE TERMINAL DRAWINGS
  - PRODUCT SPECIFICATION: PS-08-50 AND PS-40-02
  - PACKAGING INFORMATION: SEE LEGEND
  - MATES WITH (3.96)/.156 CENTER HEADERS AND (1.14)/.045 SQUARE OR ROUND PINS
  - HOUSING ACCEPTS STANDARD TERMINAL NOS.  
 2478 (18-24 AWG) WITH (2.79)/.110 MAX. INSULATION DIA.  
 2578 (22-26 AWG) WITH (1.65)/.065 MAX. INSULATION DIA.  
 OR TRIFURCON TERMINAL NOS.  
 6438 (18-22 AWG) WITH (2.79)/.110 MAX. INSULATION DIA.  
 6838 (18-24 AWG) WITH (2.79)/.110 MAX. INSULATION DIA.  
 7258 (22-26 AWG) WITH (1.65)/.065 MAX. INSULATION DIA.
  - BOW (.006 MM/MM) / .006 IN/IN.
  - (0.13)/.005 MAX. FLASH ALLOWED ALONG DIMENSION B AND IN LOCKING WINDOW.
  - THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

OPTION CODE	RAMP	POLARIZE	PACKAGING	RIB
A	NO	NO	BULK PER PK-41695-001	NO
B	YES	NO	BULK PER PK-41695-002	NO
D	YES	YES	BULK PER PK-41695-003	NO
E	YES	NO	BULK PER PK-41695-002	YES
G	END RAMP ONLY	YES	BULK PER PK-41695-003	NO

4	G4
3	G4
2	G4
1	G4

<b>ADD PART NUMBERS</b> IEC NO. UCF2009-1002 DRAWN/KIPER 2008/10/30 CHKD/SSOUSEK 2008/10/30 APPR/FSMTH 2008/10/30	<b>QUALITY SYMBOLS</b> ▽=0 ▽=0	<b>GENERAL TOLERANCES (UNLESS SPECIFIED)</b> mm INCH		<b>DIMENSION STYLE</b> MM/IN	<b>SCALE</b> ---	<b>DESIGN UNITS</b> INCH	THIRD ANGLE PROJECTION
		4 PLACES ±.010 ±.010 3 PLACES ±.025 ±.014 2 PLACES ±.036 ±.014 1 PLACE ±.036 ±.014 ANGULAR ±1/2°	DRAWN BY SKOWRONSKI 04/05/186 CHECKED BY PATEL 04/05/186 APPROVED BY ENZ 04/05/186	TITLE (3.96)/.156 CENTERLINE CONNECTOR HOUSING FOR KK CRIMP TERMINALS		MOLEX INCORPORATED	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. SEE CHART DOCUMENT NO. SD-41695	SHEET NO. 1 OF 4		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			



41695-N-AN-*		
PART NO.	ENG. NO.	VOIDS
	NOT AVAILABLE	
09-50-8020	41695-N-A2	
09-50-8030	41695-N-A3	
09-50-8040	41695-N-A4	
09-50-8050	41695-N-A5	
09-50-8060	41695-N-A6	
09-50-8070	41695-N-A7	
09-50-8080	41695-N-A8	
09-50-8090	41695-N-A9	
09-50-8100	41695-N-A10	
09-50-8110	41695-N-A11	
09-50-8120	41695-N-A12	
09-50-8130	41695-N-A13	
09-50-8140	41695-N-A14	
09-50-8150	41695-N-A15	
09-50-8160	41695-N-A16	
09-50-8170	41695-N-A17	
09-50-8180	41695-N-A18	
09-50-8190	41695-N-A19	
09-50-8200	41695-N-A20	
09-50-9085	41695-N-A8-2	2
41695-0001	41695-N-A6-3	3


41695-N-BN-*		
PART NO.	ENG. NO.	VOIDS
	NOT AVAILABLE	
09-50-8021	41695-N-B2	
09-50-8031	41695-N-B3	
09-50-8041	41695-N-B4	
09-50-8051	41695-N-B5	
09-50-8061	41695-N-B6	
09-50-8071	41695-N-B7	
09-50-8081	41695-N-B8	
09-50-8091	41695-N-B9	
09-50-8101	41695-N-B10	
09-50-8111	41695-N-B11	
09-50-8121	41695-N-B12	
09-50-8131	41695-N-B13	
09-50-8141	41695-N-B14	
09-50-8151	41695-N-B15	
09-50-8161	41695-N-B16	
09-50-8171	41695-N-B17	
09-50-8181	41695-N-B18	
09-50-8191	41695-N-B19	
09-50-8201	41695-N-B20	
09-50-9030	41695-N-B3-2	2
	41695-N-B5-2	2
	41695-N-B9-2	2
	41695-N-B11-2	2
	41695-N-B12-2	2
	41695-N-B14-2	2
09-50-9150	41695-N-B15-14	14
09-50-9060	41695-N-B6-5	5
09-50-9070	41695-N-B7-6	6
09-50-9071	41695-N-B7-2	2
09-50-9040	41695-N-B4-3	3
09-50-9090	41695-N-B9-7	7
	41695-N-B14-13	13
09-50-9136	41695-N-B13-5	5
09-50-9137	41695-N-B13-8	8
09-50-9050	41695-N-B5-51	2,4
09-50-9061	41695-N-B6-3	3
09-50-9080	41695-N-B8-2	2

41695-G-AN-*		
PART NO.	ENG. NO.	VOIDS
41695-2032	41695-G-A02	
41695-2033	41695-G-A03	
41695-2034	41695-G-A04	
41695-2035	41695-G-A05	
41695-2036	41695-G-A06	
41695-2037	41695-G-A07	
41695-2038	41695-G-A08	
41695-2039	41695-G-A09	
41695-2040	41695-G-A10	
41695-2041	41695-G-A11	
41695-2042	41695-G-A12	


41695-G-BN-*		
PART NO.	ENG. NO.	VOIDS
41695-2000	41695-G-B02	
41695-2005	41695-G-B03	
41695-2002	41695-G-B04	
41695-2006	41695-G-B05	
41695-2007	41695-G-B06	
41695-2008	41695-G-B07	
41695-2009	41695-G-B08	
41695-2010	41695-G-B09	
41695-2011	41695-G-B10	
41695-2012	41695-G-B11	
41695-2013	41695-G-B12	

### OPTION CODE D

RAMP WITH POLARIZING PEGS (RIBS)

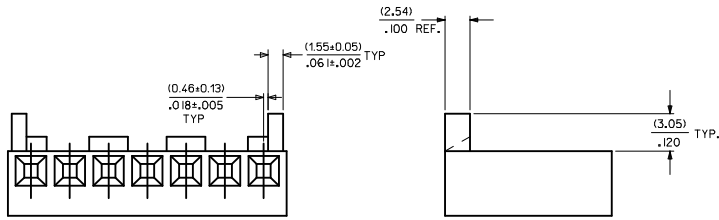


WHEN MATING VERSIONS D AND G WITH THE BREAKAWAY FRICTION LOCK HEADER SERIES OR THE POLARIZING HEADER SERIES THE END FRICTION LOCK OR POLARIZING WALL MUST BE REMOVED



WHEN MATING WITH BREAKAWAY HEADERS THE FRICTION LOCK WALL MUST BE REMOVED

<b>ADD PART NUMBERS</b> IEC NO: UCP2009-1002 2008/10/30 DRAWN/KIPPER 2008/10/30 CHKD/SSOUSEK 2008/10/30 APPR/FSM TH	<b>QUALITY SYMBOLS</b> ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN	SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		4 PLACES # --- ± --- 3 PLACES # --- ± --- 2 PLACES # --- ± --- 1 PLACE # --- ± ---	mm      INCH	DRAWN BY SAMIEC      09/22/86	CHECKED BY PATEL      09/22/86	APPROVED BY ENZ      09/22/86	TITLE (3.96)/.156 CENTERLINE CONNECTOR HOUSING FOR KK CRIMP TERMINAL		
		ANGULAR ±1/2°		MATERIAL NO. SEE CHART		MOLEX INCORPORATED			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE D		DOCUMENT NO. SD-41695		SHEET NO. 2 OF 4	

OPTION CODE E  
RAMP WITH RIBS FOR OVER MOLDING

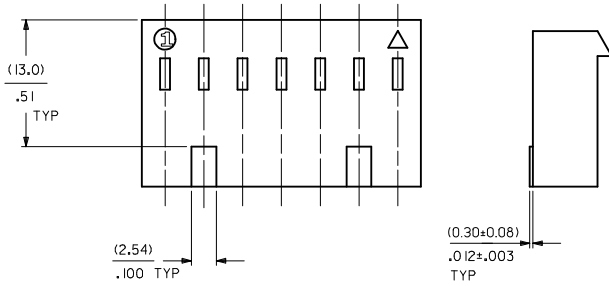

41695-N-DN-\*

PART NO.	ENG. NO.	VOIDS
	NOT AVAILABLE	
09-50-8023	41695-N-D2	
09-50-8033	41695-N-D3	
09-50-8043	41695-N-D4	
09-50-8053	41695-N-D5	
09-50-8063	41695-N-D6	
09-50-8073	41695-N-D7	
09-50-8083	41695-N-D8	
09-50-8093	41695-N-D9	
09-50-8103	41695-N-D10	
09-50-8113	41695-N-D11	
09-50-8123	41695-N-D12	
09-50-8133	41695-N-D13	
09-50-8143	41695-N-D14	
09-50-8153	41695-N-D15	
09-50-8163	41695-N-D16	
09-50-8173	41695-N-D17	
09-50-8183	41695-N-D18	
09-50-8193	41695-N-D19	
09-50-8203	41695-N-D20	
09-50-9053	41695-N-D5-12	12
09-50-9094	41695-N-D9-3	3
09-50-9033	41695-N-D3-2	2
09-50-9043	41695-N-D4-2	2
09-50-9063	41695-N-D6-2	2
09-50-9073	41695-N-D7-2	2
09-50-9044	41695-N-D4-3	3

41695-N-EN-\*

PART NO.	ENG. NO.	VOIDS
	NOT AVAILABLE	
09-50-8024	41695-N-E2	
	41695-N-E3	
	41695-N-E4	
	41695-N-E5	
09-50-8064	41695-N-E6	
	41695-N-E7	
	41695-N-E8	
	41695-N-E9	
	41695-N-E10	
	41695-N-E11	
	41695-N-E12	
	41695-N-E13	
	41695-N-E14	
	41695-N-E15	
	41695-N-E16	
	41695-N-E17	
	41695-N-E18	
	41695-N-E19	
	41695-N-E20	
09-50-9032	41695-N-E3-2	2
09-50-9042	41695-N-E4-2	2
09-50-9062	41695-N-E6-2	2
09-50-9072	41695-N-E7-2	2

41695-N-FN-\*\*\*

PART NO.	ENG. NO.	PEG	VOIDS
OBSOLETE	41695-N-F7-D	4	
OBSOLETE	41695-N-F7-E	5	

41695-G-DN-\*

PART NO.	ENG. NO.	VOIDS
41695-2001	41695-G-D02	
41695-2004	41695-G-D03	
41695-2021	41695-G-D04	
41695-2022	41695-G-D05	
41695-2023	41695-G-D06	
41695-2024	41695-G-D07	
41695-2025	41695-G-D08	
41695-2026	41695-G-D09	
41695-2027	41695-G-D10	
41695-2028	41695-G-D11	
41695-2029	41695-G-D12	
41695-2003	41695-G-D20	

41695-G-EN-\*

PART NO.	ENG. NO.	VOIDS
41695-2043	41695-G-E02	
41695-2044	41695-G-E03	
41695-2045	41695-G-E04	
41695-2046	41695-G-E05	
41695-2047	41695-G-E06	
41695-2048	41695-G-E07	
41695-2049	41695-G-E08	
41695-2050	41695-G-E09	
41695-2051	41695-G-E10	
41695-2052	41695-G-E11	
41695-2053	41695-G-E12	

<b>ADD PART NUMBERS</b> IEC NO. UCF2009-1002 2008/10/20 DRAWN/KIPPER 2008/10/20 CHKD/SSOUSEK 2008/10/20 APPR/FSM TH 2008/10/20 <b>G4</b>	<b>QUALITY SYMBOLS</b> 	<b>GENERAL TOLERANCES (UNLESS SPECIFIED)</b>		<b>DIMENSION STYLE</b> MM/IN	<b>SCALE</b> ---	<b>DESIGN UNITS</b> INCH	<b>THIRD ANGLE PROJECTION</b>	
		4 PLACES # --- # --- 3 PLACES # --- # --- 2 PLACES # --- # --- 1 PLACE # --- # ---	mm      INCH +      + -      - ±      ±	<b>DRAWN BY</b> SAMIEC	<b>DATE</b> 09/01/87	<b>TITLE</b> (3.96)/.156 CENTERLINE CONNECTOR HOUSING FOR KK CRIMP TERMINAL		
		<b>DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</b>		<b>APPROVED BY</b> LENZ	<b>DATE</b> 09/01/87	<b>MOLEX INCORPORATED</b>		
		<b>MATERIAL NO.</b> SEE CHART		<b>DOCUMENT NO.</b> SD-41695		<b>SHEET NO.</b> 3 OF 4		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION