


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1502010014](#)  
**Status:** **Active**  
**Overview:** Ditto Wire-to-Wire Interconnects  
**Description:** Ditto Hermaphroditic Crimp Housing, Positive Lock, 4 Circuit, High-Temperature, Natural

**Documents:**

|   |   |
|---|---|
| <a href="#">Drawing (PDF)</a>                                 | <a href="#">Application Specification 1502000000-AS-000 (PDF)</a> |
| <a href="#">Product Specification 1502000000-PS-000 (PDF)</a> | <a href="#">Packaging Specification PK-150170-0000-000 (PDF)</a>  |
| <a href="#">Product Specification 1502000000-TS-000 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>              |

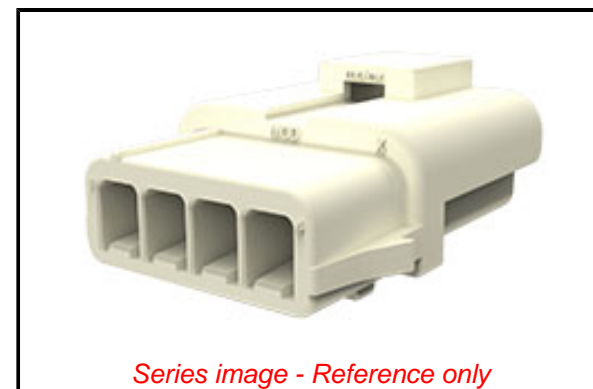

Series image - Reference only

**General**

|                |  |
|----------------|--|
| Product Family | Crimp Housings                                   |
| Series         | <a href="#">150201</a>                           |
| Application    | Power, Wire-to-Wire                              |
| Overview       | <a href="#">Ditto Wire-to-Wire Interconnects</a> |
| Product Name   | Ditto  |
| UPC            | 191130051687                                     |

**Physical**

|                               |                 |
|-------------------------------|-----------------|
| Circuits (maximum)            | 4               |
| Color - Resin                 | Natural (White) |
| Gender                        | Hermaphroditic  |
| Glow-Wire Capable             | No              |
| Keying to Mating Part         | None            |
| Lock to Mating Part           | Yes             |
| Material - Resin              | Nylon           |
| Net Weight                    | 1.791/g         |
| Number of Rows                | 1               |
| Packaging Type                | Bag             |
| Panel Mount                   | No              |
| Pitch - Mating Interface      | 3.00mm          |
| Pitch - Termination Interface | 3.00mm          |
| Polarized to Mating Part      | Yes             |
| Temperature Range - Operating | -40° to +150°C  |

**Material Info**

**Reference - Drawing Numbers**

|                           |                                      |
|---------------------------|--------------------------------------|
| Application Specification | 1502000000-AS-000                    |
| Packaging Specification   | PK-150170-0000-000                   |
| Product Specification     | 1502000000-PS-000, 1502000000-TS-000 |
| Sales Drawing             | 1502010000-SD-000                    |

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
ECHA\_01\_2020 (16  
January 2020

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[150201](#) Series

**Mates With**

Identical Housing [1502010014](#)

**Use With**

Ditto High-Temperature Hermaphroditic  
Terminals [1502000011](#) , [1502000012](#) ,  
Ditto High-Temperature TPA Retainer  
[1502120014](#)