

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 793434

FEATURES AND SPECIFICATIONS

Features and Benefits

- Blind mating panel mounted plug
- Positive housing locks to mate with Mini-Fit, Jr.
- Fully isolated terminals to protect contacts from damage
- Uses standard Mini-Fit series terminals
- 43770 provides first-mate/last-break capability

Reference Information

Product Specification: PS-5556-0002

Packaging: Tray and bag

UL File No.: E29179

CSA File No.: LR19980

TUV License No.: R75142

Mates With:

42475—[5557](#), [42385](#) and [42474](#) receptacles

43770—[43760](#) receptacle

Use With:

42475—[5558](#), [44475](#) (HCS) and [44478](#) terminals

43770—[5558](#), [44475](#) (HCS) and [44478](#) terminals

Designed In: Millimeters

Mechanical

Contact Insertion Force: 1.5kg max.

Contact Retention to Housing: 3.0kg min.

Wire Pull-Out Force: 9.0kg min.

Mating Force: 0.7kg (1.54 lb) max.

Unmating Force: 0.35kg (0.7 lb) min.

Normal Force: 200g min.

Durability: 30 cycles

Physical

Housing: 6/6 nylon, UL 94V-2 or 94V-0

Contact: Brass or Phosphor Bronze


Plating: Tin, select Gold or overall Gold

Operating Temperature: -40 to +105°C


molex® 4.20mm (.165") Pitch Mini-Fit, BMI™ Plug

42475/43770

Dual Row With Panel Mount Ears



CATALOG DRAWING (FOR REFERENCE ONLY)

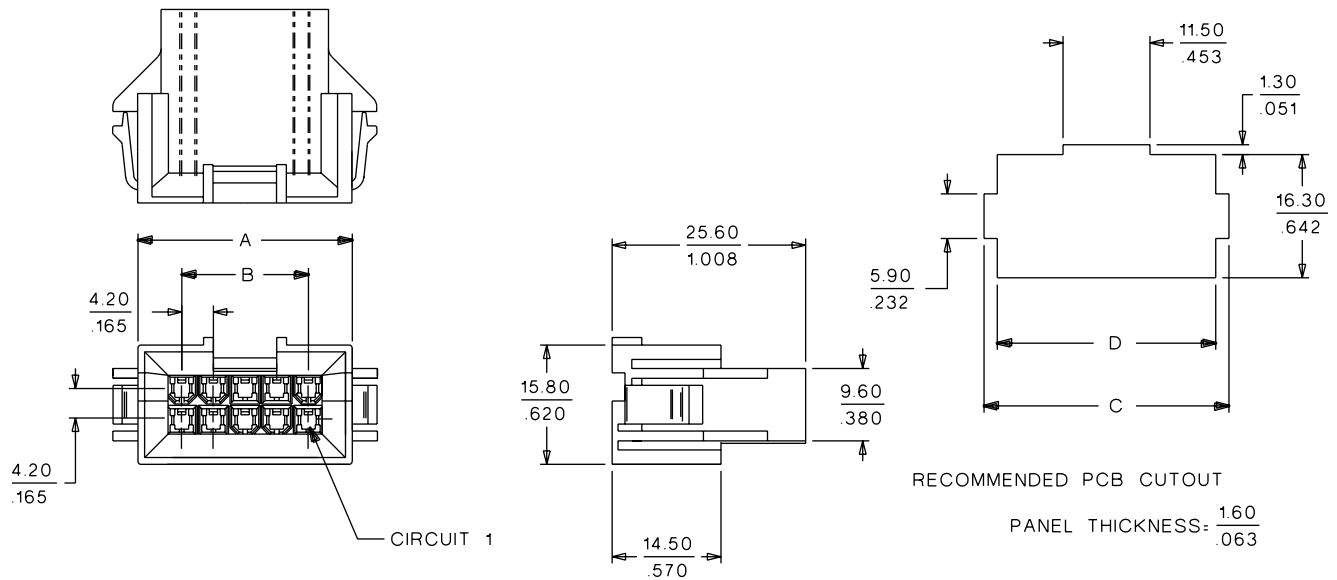

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.		Dimension			
	94V-2	94V-0	A	B	C	D
4	• 15-06-0045	• 15-06-0046	15.80 (.622)	4.20 (.165)	19.80 (.779)	16.30 (.642)
6	• 15-06-0065		20.00 (.787)	8.40 (.331)	24.00 (.945)	20.50 (.807)
8	• 15-06-0085		24.20 (.952)	12.60 (.496)	28.20 (1.110)	24.70 (.972)
10	• 15-06-0105	• 15-06-0106	28.40 (1.118)	16.80 (.661)	32.40 (1.276)	28.90 (1.138)
14	• 15-06-0145	• 15-06-0146	36.80 (1.449)	25.20 (.992)	40.80 (1.606)	37.30 (1.469)
18	• 15-06-0185	• 15-06-0186	45.20 (1.780)	33.60 (1.323)	49.20 (1.937)	45.70 (1.799)
20	• 15-06-0205		49.40 (1.945)	37.80 (1.488)	53.40 (2.102)	49.90 (1.965)
24	• 15-06-0245		57.80 (2.276)	46.20 (1.819)	61.80 (2.433)	58.30 (2.295)
36	• 43770-0001		79.50 (3.130)	71.40 (2.811)	87.00 (3.430)	83.49 (3.290)

• US Standard Product, available through Molex franchised distributors



PRODUCT SPECIFICATION

MINI-FIT BMI

1.0 SCOPE

This Product Specification covers performance requirements for the MINI-FIT BMI 4.20 mm (.165 inch) centerline (pitch) printed circuit board (PCB) connector series with Tin or Gold plating, and The MINI-FIT BMI connector series terminated with 16 to 28 AWG wire using Crimp technology with Tin or Gold plating.

2.0 PRODUCT DESCRIPTION

2.1 PRODUCT NAME AND SERIES NUMBER (S)

<u>PRODUCT NAME</u>	<u>PART NUMBER</u>
Female Crimp Terminal	5556-****
Male Crimp Terminal	5558-****
Receptacle Housing	42474-****
Plug Housing	42475-****
Vertical Header Assembly	42440-****
Right Angle Header Assembly	42404-****
Receptacle Header Assembly	42385-****
Plug Housing	43588-06*1

2.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKINGS

See the appropriate sales drawings for the information on dimensions, materials, platings and markings.

2.3 SAFETY AGENCY APPROVALS

UL File: E29179
CSA Certificate: LR 19980
TUV Certificate: R75142-8

3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

See sales drawings and the other sections of this specification for the necessary referenced documents and specifications

4.0 RATINGS

4.1 VOLTAGE

600 Volts AC (RMS) (or 600 Volts DC)

4.2 CURRENT AND APPLICABLE WIRES

Maximum Insulation Diameter and Applicable Wire Gauges	16 AWG: 3.10/. 122 MAXIMUM
	18-24 AWG: 3.10/. 122 MAXIMUM
	22-28 AWG: 1.80/. 071 MAXIMUM

REVISION: D2	EGR/ECN INFORMATION: EC No: UCP2004-2290 DATE: 2004 / 05 / 14	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT BMI CONNECTOR SYSTEM	SHEET No. 1 of 5
DOCUMENT NUMBER: PS-5556-002	CREATED / REVISED BY: BANDURA	CHECKED BY: BANDURA	APPROVED BY: MARGULIS



PRODUCT SPECIFICATION

4.2 CURRENT AND APPLICABLE WIRES (continued)

MAXIMUM CURRENT RATING (Amperes)									
Brass					Phosphor Bronze				
Wire \ Ckt. Size	2 & 3	4 - 6	7 - 10	12 - 24	Wire \ Ckt. Size	2 & 3	4 - 6	7 - 10	12 - 24
AWG #16	9	8	7	6	AWG #16	8	7	6	5
AWG #18	9	8	7	6	AWG #18	8	7	6	5
AWG #20	7	6	5	5	AWG #20	6	5	4	4
AWG #22	5	4	4	4	AWG #22	4	3	3	3
AWG #24	4	3	3	3	AWG #24	3	2	2	2
AWG #26	3	2	2	2	AWG #26	2	1	1	1
AWG #28	2	1	1	1	AWG #28	1	1	1	1

4.3 TEMPERATURE

Operating: * - 40°C to + 105°C

Nonoperating: - 40°C to + 105°C

**Including 30°C terminal temperature at rated current*

5.0 PERFORMANCE

5.1 ELECTRICAL REQUIREMENTS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
1	Contact Resistance (Low Level)	Mate connectors: apply a maximum voltage of 20 mV and a current of 100 mA. Wire resistance shall be removed from the measured value.	10 milliohms MAXIMUM [initial]
2	Contact Resistance @ Rated Current	Mate connectors: apply a maximum voltage of 20 mV at rated current.	10 milliohms MAXIMUM [initial]
3	Contact Resistance of Wire Termination (Low Level)	Terminate the applicable wire to the terminal and measure wire using a voltage of 20 mV and a current of 100 mA.	5 milliohms MAXIMUM [initial]
4	Insulation Resistance	Mate connectors: apply a voltage of 500 VDC between adjacent terminals and between terminals to ground.	1000 Megohms MINIMUM

REVISION: D2	EGR/ECN INFORMATION: EC No: UCP2004-2290 DATE: 2004 / 05 / 14	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT BMI CONNECTOR SYSTEM	SHEET No. 2 of 5
DOCUMENT NUMBER: PS-5556-002	CREATED / REVISED BY: BANDURA	CHECKED BY: BANDURA	APPROVED BY: MARGULIS



PRODUCT SPECIFICATION

5.1 ELECTRICAL REQUIREMENTS (continued)

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
5	Dielectric Withstanding Voltage	Mate connectors: apply a voltage of 1500 VAC for 1 minute between adjacent terminals and between terminals to ground.	No breakdown. Current leakage < 5 mA
6	Temperature Rise (via Current Cycling)	Mate connectors. Measure the temperature rise at the rated current after 96 hours, during current cycling (45 minutes ON and 15 minutes OFF per hour) for 240 hours, and after final 96-hour steady state.	Temperature rise: +30°C MAXIMUM

5.2 MECHANICAL REQUIREMENTS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
1	Terminal Mate and Unmate Forces	Insert and withdraw terminal (male to female) at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	14.7 N (3.30 lbf) MAXIMUM insertion force & 1.0 N (0.02 lbf) MINIMUM withdrawal force
2	Crimp Terminal Retention Force (in Housing)	Axial pullout force on the terminal in the housing at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	30 N (6.74 lbf) MINIMUM retention force
3	Terminal Pin to Header Retention Force	Axial pullout force on the terminal in the housing at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	4.45 N (1.00 lbf) MINIMUM retention force
4	Durability	Mate connectors up to 30 cycles at a maximum rate of 10 cycles per minute prior to Environmental Tests.	20 milliohms MAXIMUM
5	Vibration (Random)	Mate connectors and vibrate per EIA 364-28, test condition VII.	10 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond
6	Shock (Mechanical)	Mate connectors and shock at 50 g's with ½ sine wave (11 milliseconds) shocks in the ±X, ±Y, ±Z axes, (18 shocks total).	20 milliohms MAXIMUM & Discontinuity < 1 microsecond

REVISION: D2	EGR/ECN INFORMATION: EC No: UCP2004-2290 DATE: 2004 / 05 / 14	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT BMI CONNECTOR SYSTEM	SHEET No. 3 of 5
DOCUMENT NUMBER: PS-5556-002	CREATED / REVISED BY: BANDURA	CHECKED BY: BANDURA	APPROVED BY: MARGULIS



PRODUCT SPECIFICATION

5.2 MECHANICAL REQUIREMENTS (continued)

7	Wire Pullout Force (Axial)	Apply an axial pullout force on the wire at a rate of 25 ± 6 mm (1 ± ¼ inch).	16 Awg = 88.0 N (19.8 lbf) Min. 18 Awg = 88.0 N (19.8 lbf) Min. 20 Awg = 59.0 N (13.3 lbf) Min. 22 Awg = 39.0 N (8.78 lbf) Min. 24 Awg = 29.0 N (6.52 lbf) Min. 26 Awg = 19.0 N (4.27 lbf) Min. 28 Awg = 9.80 N (2.20 lbf) Min.
8	Crimp Terminal Insertion Force (into Housing)	Apply an axial insertion force on the terminal at a rate of 25 ± 6 mm (1 ± ¼ inch).	15.0 N (3.37 lbf) MAXIMUM insertion force
9	Normal Force	Apply a perpendicular force.	0.49 N (50 grams) MINIMUM [Gold (noble) plating] OR 1.47 N (150 grams) MINIMUM [Tin (non-noble) plating]
10	PCB Engagement and Separation Forces	Engage and separate a connector at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute. (Applies to parts with PCB retention features only)	49.0 N (11.0 lbf) MAXIMUM insertion force & 10.0 N (2.24 lbf) MINIMUM withdrawal force
11	Panel Insertion and Withdrawal Forces	Insert and withdraw a connector at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute. (Applies to parts with panel retention features only)	225 N (50.7 lbf) MAXIMUM insertion force & 157 N (35.3 lbf) MINIMUM withdrawal force

5.3 ENVIRONMENTAL REQUIREMENTS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
1	Thermal Shock	Mate connectors: expose for 5 cycles between temperatures -55 and 105°C; dwell 0.5 hours at each temperature.	20 milliohms MAXIMUM Visual: No Damage Dielectric Strength per 5.1.5 Insulation Resistance per 5.1.4
2	Thermal Aging	Mate connectors; expose to: 96 hours at 105 ± 2°C	20 milliohms MAXIMUM & Visual: No Damage
3	Humidity (Steady State)	Mate connectors: expose to a temperature of 60 ± 2°C with a relative humidity of 90-95% for 96 hours.	20 milliohms MAXIMUM Dielectric Strength per 5.1.5 Insulation Resistance per 5.1.4 Visual: No Damage

REVISION: D2	EGR/ECN INFORMATION: EC No: UCP2004-2290 DATE: 2004 / 05 / 14	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT BMI CONNECTOR SYSTEM	SHEET No. 4 of 5
DOCUMENT NUMBER: PS-5556-002	CREATED / REVISED BY: BANDURA	CHECKED BY: BANDURA	APPROVED BY: MARGULIS



PRODUCT SPECIFICATION


5.3 ENVIRONMENTAL REQUIREMENTS (continued)

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
4	Solderability	Per SMES-152	Solder coverage: 95% MINIMUM (per SMES-152)
5	Solder Resistance	Dip connector terminal tails in solder: Solder Duration: 5 ± 0.5 seconds; Solder Temperature: $235 \pm 5^\circ\text{C}$	Visual: No Damage to insulator material
6	Cold Resistance	Mate connectors: Duration: 96 hours; Temperature: $-40 \pm 3^\circ\text{C}$	20 milliohms MAXIMUM Visual: No Damage
7	Corrosive Atmosphere: Sulfur Dioxide Gas (SO₂)	Mate connectors: Duration: 24 hours exposure. Atmosphere: 50 parts per million (ppm) SO ₂ Gas. Temperature: $40 \pm 3^\circ\text{C}$	20 milliohms MAXIMUM Visual: No damage


6.0 PACKAGING

Parts shall be packaged to protect against damage during handling, transit and storage.

REVISION: D2	EGR/ECN INFORMATION: EC No: UCP2004-2290 DATE: 2004 / 05 / 14	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT BMI CONNECTOR SYSTEM	SHEET No. 5 of 5
DOCUMENT NUMBER: PS-5556-002	CREATED / REVISED BY: BANDURA	CHECKED BY: BANDURA	APPROVED BY: MARGULIS

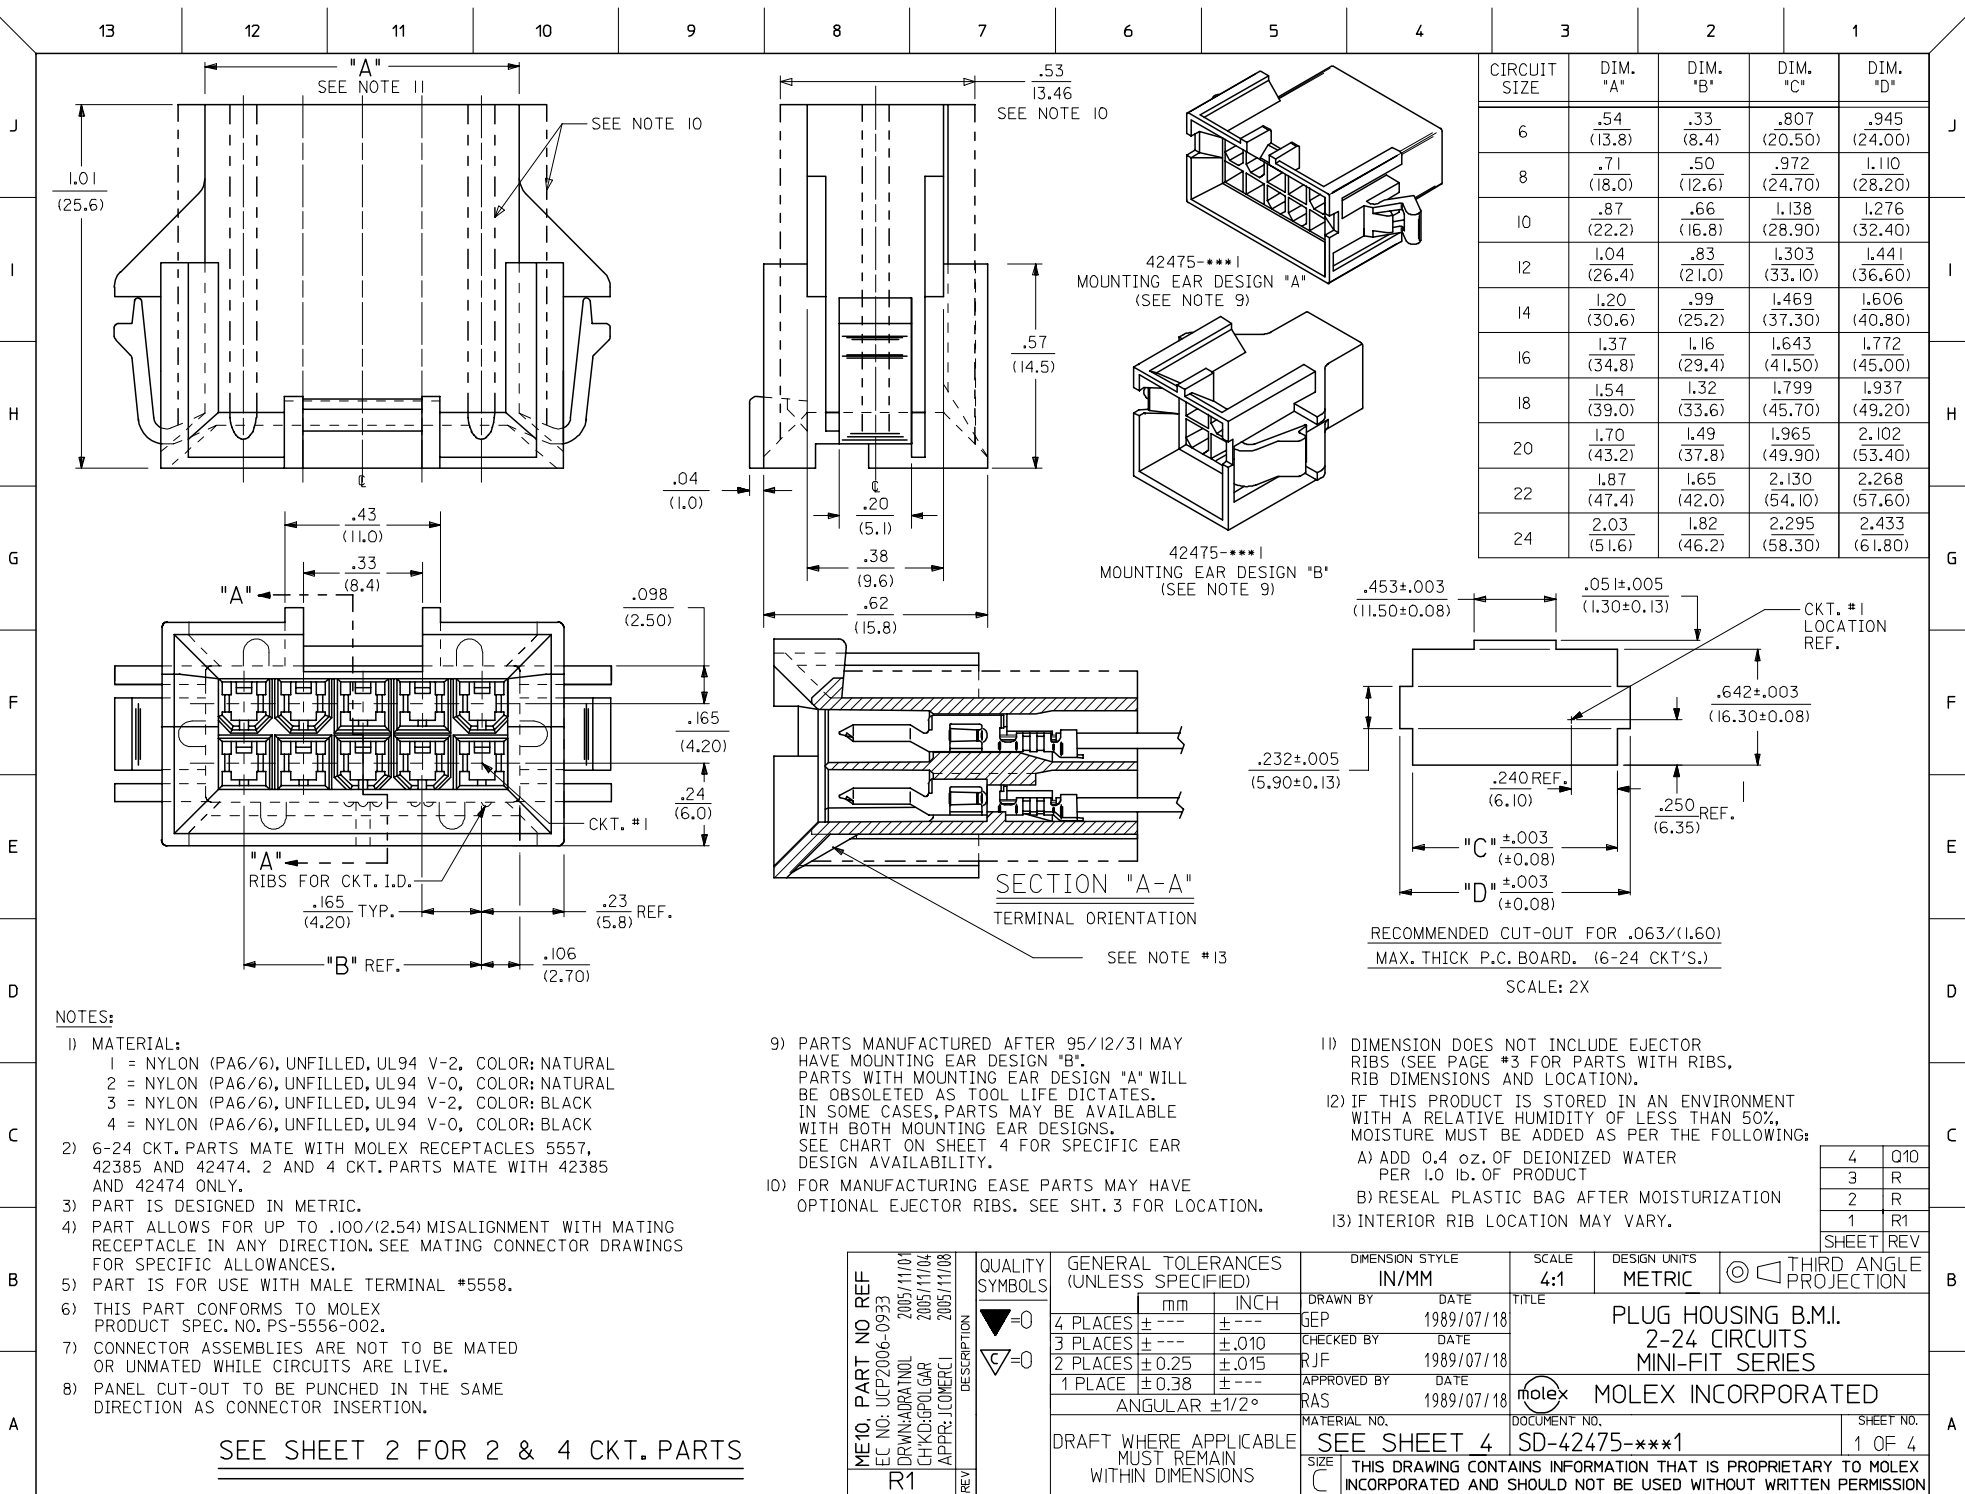

CIRCUIT SIZE	DIM. "A"	DIM. "B"	DIM. "C"	DIM. "D"
6	.54 (13.8)	.33 (8.4)	.807 (20.50)	.945 (24.00)
8	.71 (18.0)	.50 (12.6)	.972 (24.70)	1.110 (28.20)
10	.87 (22.2)	.66 (16.8)	1.138 (28.90)	1.276 (32.40)
12	1.04 (26.4)	.83 (21.0)	1.303 (33.10)	1.441 (36.60)
14	1.20 (30.6)	.99 (25.2)	1.469 (37.30)	1.606 (40.80)
16	1.37 (34.8)	1.16 (29.4)	1.643 (41.50)	1.772 (45.00)
18	1.54 (39.0)	1.32 (33.6)	1.799 (45.70)	1.937 (49.20)
20	1.70 (43.2)	1.49 (37.8)	1.965 (49.90)	2.102 (53.40)
22	1.87 (47.4)	1.65 (42.0)	2.130 (54.10)	2.268 (57.60)
24	2.03 (51.6)	1.82 (46.2)	2.295 (58.30)	2.433 (61.80)

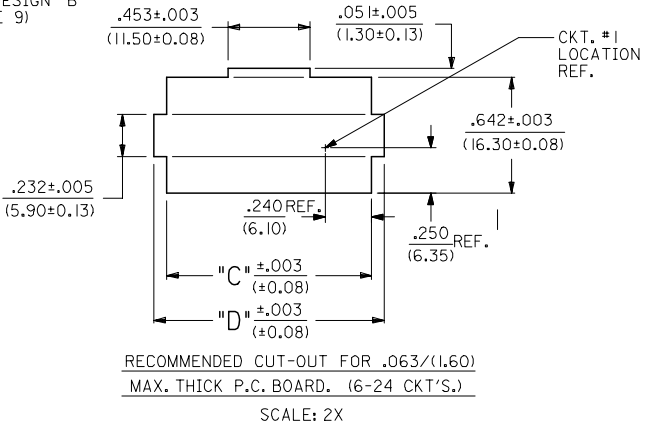

NOTES:

- 1) MATERIAL:
 - 1 = NYLON (PA6/6), UNFILLED, UL94 V-2, COLOR: NATURAL
 - 2 = NYLON (PA6/6), UNFILLED, UL94 V-0, COLOR: NATURAL
 - 3 = NYLON (PA6/6), UNFILLED, UL94 V-2, COLOR: BLACK
 - 4 = NYLON (PA6/6), UNFILLED, UL94 V-0, COLOR: BLACK
- 2) 6-24 CKT. PARTS MATE WITH MOLEX RECEPTACLES 5557, 42385 AND 42474. 2 AND 4 CKT. PARTS MATE WITH 42385 AND 42474 ONLY.
- 3) PART IS DESIGNED IN METRIC.
- 4) PART ALLOWS FOR UP TO .100/(2.54) MISALIGNMENT WITH MATING RECEPTACLE IN ANY DIRECTION. SEE MATING CONNECTOR DRAWINGS FOR SPECIFIC ALLOWANCES.
- 5) PART IS FOR USE WITH MALE TERMINAL #5558.
- 6) THIS PART CONFORMS TO MOLEX PRODUCT SPEC. NO. PS-5556-002.
- 7) CONNECTOR ASSEMBLIES ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
- 8) PANEL CUT-OUT TO BE PUNCHED IN THE SAME DIRECTION AS CONNECTOR INSERTION.

- 9) PARTS MANUFACTURED AFTER 95/12/31 MAY HAVE MOUNTING EAR DESIGN "B". PARTS WITH MOUNTING EAR DESIGN "A" WILL BE OBSOLETE AS TOOL LIFE DICTATES. IN SOME CASES, PARTS MAY BE AVAILABLE WITH BOTH MOUNTING EAR DESIGNS. SEE CHART ON SHEET 4 FOR SPECIFIC EAR DESIGN AVAILABILITY.
- 10) FOR MANUFACTURING EASE PARTS MAY HAVE OPTIONAL EJECTOR RIBS. SEE SHT. 3 FOR LOCATION.

- 11) DIMENSION DOES NOT INCLUDE EJECTOR RIBS (SEE PAGE #3 FOR PARTS WITH RIBS, RIB DIMENSIONS AND LOCATION).
- 12) IF THIS PRODUCT IS STORED IN AN ENVIRONMENT WITH A RELATIVE HUMIDITY OF LESS THAN 50%, MOISTURE MUST BE ADDED AS PER THE FOLLOWING:
 - A) ADD 0.4 OZ. OF DEIONIZED WATER PER 1.0 LB. OF PRODUCT
 - B) RESEAL PLASTIC BAG AFTER MOISTURIZATION
- 13) INTERIOR RIB LOCATION MAY VARY.

4	Q10
3	R
2	R
1	R1
SHEET REV	

SEE SHEET 2 FOR 2 & 4 CKT. PARTS

ME10. PART NO REF EC NO: UCP2006-0933 DRW:ADRAINOL 2005/11/04 CHKD:GPOUGAR 2005/11/04 APPR:ICOMERCJ 2005/11/08 R1	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH		DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± ---	DRAWN BY GEP	DATE 1989/07/18	TITLE PLUG HOUSING B.M.I. 2-24 CIRCUITS MINI-FIT SERIES				
		3 PLACES ± --- ± .010	CHECKED BY RJF	DATE 1989/07/18	MATERIAL NO. SD-42475-***1				
		2 PLACES ± 0.25 ± .015	APPROVED BY RAS	DATE 1989/07/18	DOCUMENT NO. SD-42475-***1				
1 PLACE ± 0.38 ± --- ANGULAR ±1/2°		MATERIAL NO. SD-42475-***1		SHEET NO. 1 OF 4					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					


PART NUMBER	ENG. NUMBER	CKT. SIZE	MATERIAL (SEE NOTE 1.)	PART NUMBER	CKT. SIZE	MATERIAL (SEE NOTE 1.)
NOT TOOLED	42475-0211	2	1			
15-06-0045	42475-0411	4		42475-0431	4	3
15-06-0065	42475-0611	6		42475-0631	6	
15-06-0085	42475-0811	8		42475-0831	8	
15-06-0105	42475-1011	10		42475-1031	10	
NOT TOOLED	42475-1211	12			12	
15-06-0145	42475-1411	14		42475-1431	14	
NOT TOOLED	42475-1611	16			16	
15-06-0185	42475-1811	18		42475-1831	18	
15-06-0205	42475-2011	20		42475-2031	20	
NOT TOOLED	42475-2211	22			22	
15-06-0245	42475-2411	24	1	42475-2431	24	3
NOT TOOLED	42475-0221	2	2		2	4
15-06-0046	42475-0421	4		42475-0441	4	
15-06-0066	42475-0621	6			6	
NOT TOOLED	42475-0821	8			8	
15-06-0106	42475-1021	10		42475-1041	10	
NOT TOOLED	42475-1221	12			12	
15-06-0146	42475-1421	14		42475-1441	14	
NOT TOOLED	42475-1621	16			16	
15-06-0186	42475-1821	18		42475-1841	18	
15-06-0206	42475-2021	20		42475-2041	20	
NOT TOOLED	42475-2221	22			22	
15-06-0246	42475-2421	24	2	42475-2441	24	4

MOUNTING EAR TYPE	DESIGN A, DESIGN B (SEE SHEET 1)	
	CT. SIZE	DESIGN B
N/A	2	
B	4	
B	6	
A	8	
B	10	
N/A	12	
B	14	
N/A	16	
A & B	18	
A	20	
N/A	22	
B	24	

42475-***21, 5558-GS*	42474-***21, 5556-PBGS*P	94V-0	PHOS. BRZ.	GOLD
42475-***11, 5558-GS*	42474-***11, 5556-PBGS*P	94V-2		
42475-***21, 5558-GS*	42474-***21, 5556-GS*P	94V-0	BRASS	GOLD
42475-***11, 5558-GS*	42474-***11, 5556-GS*P	94V-2		
42475-***21, 5558-PBS*	42474-***21, 5556-PBS*P	94V-0	PHOS. BRZ.	TIN
42475-***11, 5558-PBS*	42474-***11, 5556-PBS*P	94V-2		
42475-***21, 5558-S*	42474-***21, 5556-S*P	94V-0	BRASS	TIN
42475-***11, 5558-S*	42474-***11, 5556-S*P	94V-2		
42475-***21, 5558-GS*	A-42385-***D2	94V-0	PHOS. BRZ.	GOLD
42475-***11, 5558-GS*	A-42385-***C2	94V-2		
42475-***21, 5558-GS*	A-42385-***B2	94V-0	BRASS	GOLD
42475-***11, 5558-GS*	A-42385-***A2	94V-2		
42475-***21, 5558-PBS*	A-42385-***D1	94V-0	PHOS. BRZ.	TIN
42475-***11, 5558-PBS*	A-42385-***C1	94V-2		
42475-***21, 5558-S*	A-42385-***B1	94V-0	BRASS	TIN
42475-***11, 5558-S*	A-42385-***A1	94V-2		

PLUG HOUSING/ MALE TERMINAL	MATING CONNECTOR	HSG. MAT'L.	TERM. MAT'L.	PLATING
				MATING CONNECTOR FEATURES

LEGEND:



01	SEE SHEET #1	0	SEE SHIT 1
010	SEE SHEET #1	P1	SEE SHIT. 1
09	SEE SHEET #1	P	SEE SHIT. 1
07	SEE SHEET #1	01	SEE SHIT. 1
03	SEE SHEET #1	NI	SEE SHIT. 1
02	SEE SHEET #1	N	SEE SHIT. 1
LTR.	REVISIONS	LTR.	REVISIONS

01	SEE SHEET #1	0	SEE SHIT 1
010	SEE SHEET #1	P1	SEE SHIT. 1
09	SEE SHEET #1	P	SEE SHIT. 1
07	SEE SHEET #1	01	SEE SHIT. 1
03	SEE SHEET #1	NI	SEE SHIT. 1
02	SEE SHEET #1	N	SEE SHIT. 1
LTR.	REVISIONS	LTR.	REVISIONS

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	3	2	1

13	12	11	10	9	8	7	6	5	4	
----	----	----	----	---	---	---	---	---	---	--