

FEATURES AND SPECIFICATIONS

Features and Benefits

- Positive lock
- Fully isolated terminals
- Polarized housing assures proper mating

Reference Information

Packaging: Bag
 UL File No.: E29179
 CSA File No.: LR19980
 TUV License No.: R75107
 Mates With: [3191](#) receptacle
 Designed In: Inches

Electrical


Voltage: 600V
 Current: 12.0A max.
 Dielectric Withstanding Voltage: 5000V AC rms

Physical

Housing: Nylon, UL 94V-2
 Contact: Brass
 Plating: Tin
 Operating Temperature: -40 to +105°C

molex® 6.71mm (.264") Pitch .093" Pin and Socket Header


5219



Power Connectors

F

CATALOG DRAWING (FOR REFERENCE ONLY)

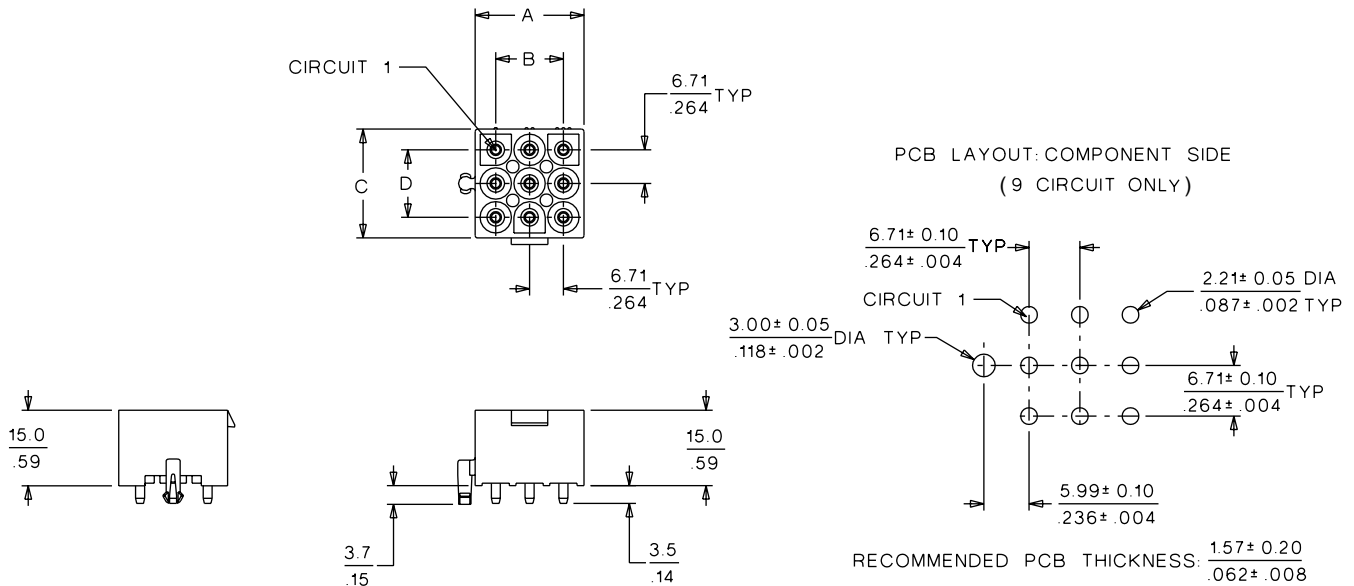

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.	Amperes Per Circuit	Dimension			
			A	B	C	D
2	15-31-1026	12	14.30 (.560)	6.71 (.264)	7.60 (.300)	
3	15-31-1036	11	21.00 (.830)	13.42 (.528)	7.60 (.300)	
4	15-31-1046	9	27.70 (1.090)	20.13 (.792)	7.60 (.300)	
6	15-31-1066	9	21.00 (.830)	13.42 (.528)	14.30 (.560)	6.71 (.264)
9	15-31-1096	9	21.00 (.830)	13.42 (.528)	21.00 (.830)	13.42 (.528)