

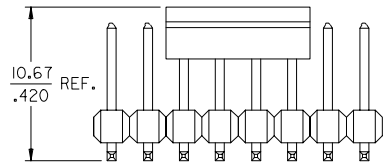


13 12 11 10 9 8 7 6 5 4 3 2 1


OPTIONAL PICK AND PLACE CAP
SEE NOTES 4 & 9.



PEG OPTIONS


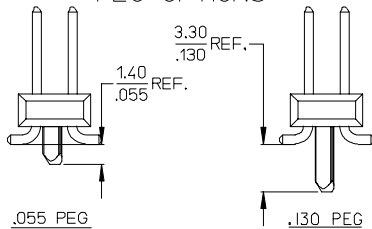


- NOTES:**
- MATERIALS:** INSULATOR: GLASS FILLED LIQUID CRYSTAL POLYMER (LCP), UL94 V-0, COLOR: BLACK
TERMINAL: PHOSPHOR BRONZE
 - FINISH:**
 TIN - 0.00381/.000150 MINIMUM TIN OVER NICKEL OVERALL.
 15 GOLD - 0.00038/.000015 MINIMUM GOLD IN SELECT AREA OVER 0.00191/.000075 MINIMUM TIN IN SELECT AREA OVER NICKEL OVERALL.
 30 GOLD - 0.00076/.000030 MINIMUM GOLD IN SELECT AREA OVER 0.00191/.000075 MINIMUM TIN IN SELECT AREA OVER NICKEL OVERALL.
 50 GOLD - 0.00127/.000050 MINIMUM GOLD IN SELECT AREA OVER 0.00254/.000100 MINIMUM TIN IN SELECT AREA OVER NICKEL OVERALL.
 * THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.
 - PART TO CONFORM TO PS-71308.
 - PACKAGING (SEE CHARTS):**
 BULK: PER PK-70873-0353
 TUBES: PER PK-70873-0041.
 FOR 71308-82** IN TUBES: PER PK-70873-042.
 PICK-N-PLACE: W/ VAC CAPS IN TUBES PER PK-70873-0691
 TAPE AND REEL: WITH VAC CAPS PER PK-70873-0805.
 SEE SHEET 3 FOR TAPE & REEL PRODUCT WITH SHALLOW POCKET REQUIREMENTS.
 - TYP. DIMENSIONS FOR LANDS SURROUNDING HOLES FOR RETENTION PEGS.
 - PIN SOLDERABILITY PER MOLEX SPEC, ES-152.
 - SEE SHEETS 2-5 FOR CHARTED DIMS., PART/EDP NO'S, AND VOIDED CIRCUITS.
 - PIN PUSHOUT FORCE: 3 LBS. MINIMUM.
 - PICK-N-PLACE CAPS WILL BE PLACED SO THAT VACUUM PICK UP AREA WILL BE IN CENTER OF PART.
 - COPLANARITY FOR CIRCUIT SIZES UP TO 40 IS 0.15 MM/0.006 INCH. FOR CIRCUIT SIZES 42 AND LARGER, CONTACT MOLEX SALES DEPARTMENT.
 - THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

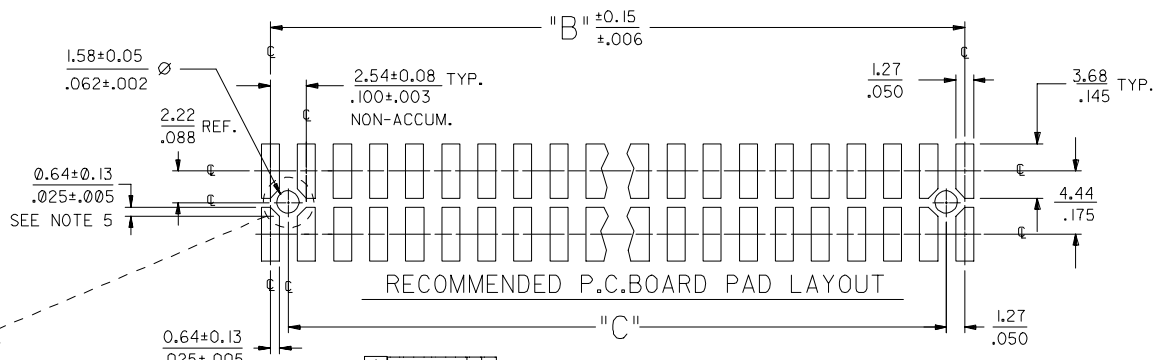

ROW "A"
ROW "B"

⌀0.50/.020U|X FOR PARTS WITH PEGS
⌀0.50/.020U|Y FOR PARTS WITHOUT PEGS

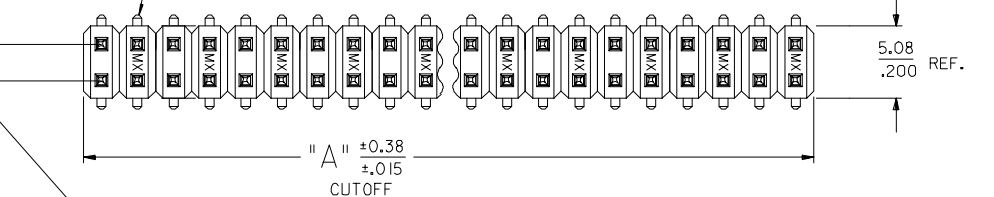

ADD 71308-6126 EC NO: UCP2007-2899 DRAWN:ADER 2007/05/14 CHKD:LS:HM DT 2007/05/15 APPR:FSM TH 2007/05/18 REV J4	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		≡=0 ▽=0		MM/IN	4:1	INCH		
			mm	INCH	DRAWN BY	DATE	TITLE	SALES ASSY INSULATOR DUAL ROW SMT W/BREAKOFF OPTION .025 SQ PINS, MOLEX INCORPORATED
			4 PLACES ± --- ± ---	3 PLACES ± --- ±.005	KMS	10/15/1999		
			2 PLACES ±0.13 ±.01	1 PLACE ±0.25 ± ---	KMS	10/15/1999		SD-71308-001
			ANGULAR ±1/2°		APPROVED BY	DATE		
					MATERIAL NO.	DOCUMENT NO.	SHEET NO.	1 OF 5
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHARTS			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

5	J4
4	J1
3	J3
2	J1
1	J4
SHI REV.	

12 11 10 9 8 7 6 5 4 3 2 1

