

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [15-92-2080](#)  
**Status:** **Active**  
**Overview:** [EBBI™ 50D](#)  
**Description:** 1.27mm Pitch EBBI™ 50D Plug, Vertical, without Latch, 80 Circuits, 3.40mm PC Tail Length

**Documents:**

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Drawing \(PDF\)](#)

**Agency Certification**


CSA LR19980  
 UL E29179

**General**

Product Family PCB Headers  
 Series [71661](#)  
 Application Board-to-Board, Signal, Wire-to-Board  
 Overview [EBBI™ 50D](#)  
 Product Name EBBI™  
 UPC 800753595859

**Physical**

Breakaway No  
 Circuits (Loaded) 80  
 Circuits (maximum) 80  
 Color - Resin Black  
 Durability (mating cycles max) 2,000  
 First Mate / Last Break No  
 Flammability 94V-0  
 Glow-Wire Compliant No  
 Guide to Mating Part No  
 Keying to Mating Part None  
 Lock to Mating Part None  
 Material - Metal Copper Alloy  
 Material - Plating Mating Gold  
 Material - Plating Termination Tin  
 Material - Resin High Temperature Thermoplastic  
 Net Weight 4.693/g  
 Number of Rows 2  
 Orientation Vertical  
 PC Tail Length 3.40mm  
 PCB Locator Yes  
 PCB Retention Yes  
 PCB Thickness - Recommended 1.60mm  
 Packaging Type Tray  
 Pitch - Mating Interface 1.27mm  
 Pitch - Termination Interface 1.27mm  
 Plating min - Mating 0.762µm  
 Plating min - Termination 1.905µm  
 Polarized to Mating Part Yes  
 Polarized to PCB Yes  
 Shrouded Fully  
 Stackable No  
 Surface Mount Compatible (SMC) No  
 Temperature Range - Operating -40°C to +105°C

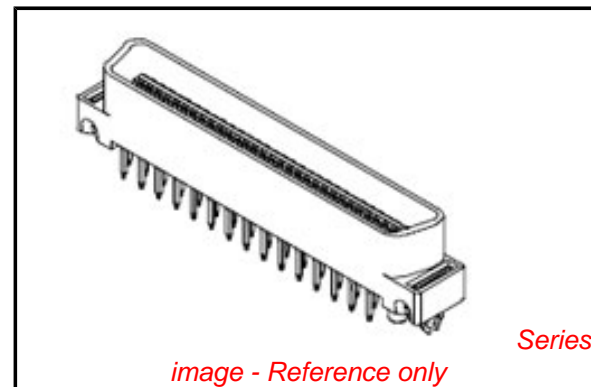

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC Contains SVHC: No**  
**Low-Halogen Status Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[71661Series](#)

**Mates With**

[EBBI™ 50D Receptacle 71660](#) , [87552](#)

Termination Interface: Style

Through Hole

**Electrical**

Current - Maximum per Contact

1.0A

Voltage - Maximum

30V

**Solder Process Data**

Lead-free Process Capability

SMC & Wave Capable (TH only)

Process Temperature max. C

260

**Material Info**

Old Part Number

A-71661-1080

**Reference - Drawing Numbers**

Sales Drawing

SDA-71661-1\*\*\*

This document was generated on 04/24/2015

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[15-92-2080](#)