


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1722644003](#)  
**Status:** **Active**  
**Overview:** [Ultra-Fit Power Connectors](#)  
**Description:** Ultra-Fit Tangless Terminal Position Assurance (TPA), 3.50mm Pitch, 3 Circuits, Natural

**Documents:**

|                                                               |                                                                   |
|---------------------------------------------------------------|-------------------------------------------------------------------|
| <a href="#">3D Model</a>                                      | <a href="#">Application Specification 1722640001-AS-000 (PDF)</a> |
| <a href="#">3D Model (PDF)</a>                                | <a href="#">Application Specification 1723230003-000 (PDF)</a>    |
| <a href="#">Drawing (PDF)</a>                                 | <a href="#">Packaging Specification 1723230005-000 (PDF)</a>      |
| <a href="#">Product Specification 1723230001-TS-000 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>              |

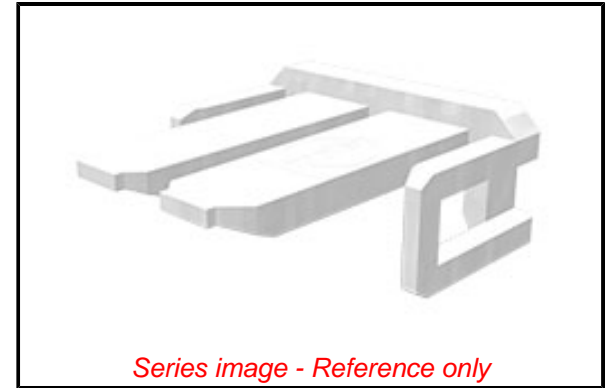

**General**

|                |                                            |
|----------------|--------------------------------------------|
| Product Family | Accessories                                |
| Series         | <a href="#">172264</a>                     |
| Component Type | Terminal Position Assurance                |
| Overview       | <a href="#">Ultra-Fit Power Connectors</a> |
| Product Name   | Ultra-Fit                                  |
| UPC            | 191128806350                               |

**Physical**

|                               |                |
|-------------------------------|----------------|
| Circuits (Loaded)             | 3              |
| Circuits (maximum)            | 3              |
| Color - Resin                 | Natural        |
| Lock to Mating Part           | Yes            |
| Material - Resin              | Nylon          |
| Net Weight                    | 0.145/g        |
| Number of Rows                | 1              |
| Packaging Type                | Bag            |
| Temperature Range - Operating | -40° to +120°C |

**Material Info**

**Reference - Drawing Numbers**

|                           |                                   |
|---------------------------|-----------------------------------|
| Application Specification | 1722640001-AS-000, 1723230003-000 |
| Packaging Specification   | 1723230005-000                    |
| Product Specification     | 1723230001-TS-000                 |
| Sales Drawing             | 1722640002-000                    |

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
ECHA\_01\_2020 (16  
January 2020

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[172264](#) Series

**Use With**

Ultra-Fit Tangless Receptacle Housing  
[172256](#) , [172258](#)