

Part Number: 0191640015


Status: Active

Description: Perma-Seal™ Male Quick Disconnect Tab for 18-22 AWG Wire, Tab Size 6.35mm (.250") x .81mm (.032")

Documents:

Note - Please disable browser pop-up blockers for documents on www.molex.com

- [Drawing \(PDF\)](#)
- [Product Specification PS-19902-011 \(PDF\)](#)
- [Product Specification PS-19902-013 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

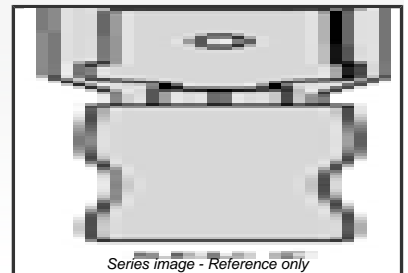

Part Detail: (show all)

- [General](#)
- ▾ [Physical](#)
- ▾ [Electrical](#)
- ▾ [Agency Certification](#)
- ▾ [Material Info](#)

General

Product Family	Quick Disconnects
Series	19164
Product Name	Perma-Seal™
Type	Quick Disconnect

Physical

Barrel Type	Closed
Color - Resin	Natural
Flammability	94V-0
Gender	Male
Glow-Wire Compliant	No
Insulation	NiAc™
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Zinc Chromate
Material - Plating Termination	Zinc Chromate
Material - Resin	Nylon
Orientation	Straight
Packaging Type	Bag
Plating min - Mating	5.080µm (200µ")
Plating min - Termination	5.080µm (200µ")
Tab Thickness	0.81mm (.032")
Tab Width	6.35mm (.250")
Temperature Range - Operating	-55°C to +125°C
Wire Insulation Diameter	3.81mm (.150") max.
Wire Size AWG	18, 20, 22
Wire Size mm²	0.25 - 1.50

Electrical(Please review the Product Specification for specific details.)

Voltage - Maximum	600V
-------------------	------

Agency Certification

CSA	LR18689
UL	E79133

Material Info

Old Part Number	SAA-9260
-----------------	----------

Reference - Drawing Numbers

Product Specification	PS-19902-011, PS-19902-013
Sales Drawing	SD-19164-039