
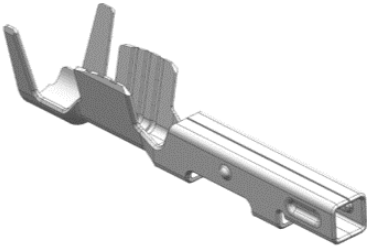




SQUBA 3.6 INTERCONNECT

Wire-To-Wire

CONNECTOR SYSTEMS

Receptacle Crimp Terminal	Plug Crimp Terminal
	
Series: 207777	Series: 207776

Receptacle Housing	Plug Housing
	
Series: 207782	Series: 207778

[Squba Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION: C	ECM INFORMATION: EC No: 625539 DATE: 2019/10/11	TITLE: PRODUCT SPECIFICATION SQUBA 3.6 INTERCONNECT SYSTEM	SHEET No. 1 of 14
DOCUMENT NUMBER: 2077760000-PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MUM
		CHECKED BY: ARAJUGOVINDA	APPROVED BY: NCSR
TEMPLATE FILENAME: 1703070003 REV A			

Table of Contents

<u>ITEMS</u>	<u>PAGE</u>
1.0 SCOPE	3
2.0 PRODUCT DESCRIPTION	3
2.1 DESCRIPTION, SERIES NUMBER, AND LINKS	3
2.2 DIMENSIONS, MATERIALS, PLATINGS	3
2.3 ENVIRONMENTAL CONFORMANCE	3
2.4 SAFETY AGENCY LISTINGS	3
3.0 APPLICABLE DOCUMENTS AND SPECIFICATION	4
3.1 MOLEX DOCUMENTS	4
3.2 INDUSTRY DOCUMENTS	4
4.0 ELECTRICAL PERFORMANCE RATINGS	4
4.1 VOLTAGE	4
4.2 CURRENT AND APPLICABLE WIRES (MAXIMUM AMPERES)	4
4.3 VOLTAGE DROP AT RATED CURRENT	6
4.4 TEMPERATURE	6
4.5 DURABILITY	7
4.6 GLOW WIRE SERIES	7
5.0 QUALIFICATION	7
6.0 PERFORMANCE	8
6.1 ELECTRICAL PERFORMANCE	8
6.2 MECHANICAL PERFORMANCE	9
6.3 ENVIRONMENTAL PERFORMANCE	10
7.0 TEST SEQUENCE GROUPS	11
8.0 PACKAGING	13
9.0 CABLE TIE AND / OR TWIST TIE LOCATION	13
10.0 POLARIZATION AND KEYING OPTIONS	14

[Scuba Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION: C	ECM INFORMATION: EC No: 625539 DATE: 2019/10/11	TITLE: PRODUCT SPECIFICATION SQUBA 3.6 INTERCONNECT SYSTEM				SHEET No. 2 of 14
DOCUMENT NUMBER: 2077760000-PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MUM	CHECKED BY: ARAJUGOVINDA	APPROVED BY: NCSR	
TEMPLATE FILENAME: 1703070003 REV A						

1.0 SCOPE

This Product Specification covers the performance requirements for the Squba 3.6 Sealed Wire-To-Wire, 3.6 mm pitch single row connector series which uses copper terminals with tin plated contact interface terminated with 16 to 20 AWG wire using Molex crimp technology. The mated system meets IP67 requirements.

2.0 PRODUCT DESCRIPTION

2.1 DESCRIPTION, SERIES NUMBER, AND LINKS

DESCRIPTION	SERIES NUMBER
Squba 3.6, Receptacle Crimp Terminal	207777
Squba 3.6, Plug Crimp Terminal	207776
Squba 3.6, Receptacle assembly	207782
Squba 3.6, Plug assembly	207778

2.2 DIMENSIONS, MATERIALS, PLATINGS

Dimensions & Plating: See individual sales drawings.

Plug Crimp Terminal Sales Drawing.....	2077760000-SD
Receptacle Crimp Terminal Sales Drawing.....	2077770000-SD
Plug Assembly Sales Drawing.....	2077780000-SD
Receptacle Assembly Sales Drawing.....	2077820000-SD

2.3 ENVIRONMENTAL CONFORMANCE

To find product compliance information:

- [Go to molex.com](http://molex.com)
- Enter the part number in the search field.
- At the bottom of the page go to “Environmental” to see compliance status.

2.4 SAFETY AGENCY LISTINGS

TBE

[Squba Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION: C	ECM INFORMATION: EC No: 625539 DATE: 2019/10/11	TITLE: PRODUCT SPECIFICATION SQUBA 3.6 INTERCONNECT SYSTEM	SHEET No. 3 of 14
DOCUMENT NUMBER: 2077760000-PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MUM
		CHECKED BY: ARAJUGOVINDA	APPROVED BY: NCSR
TEMPLATE FILENAME: 1703070003 REV A			

3.0 APPLICABLE DOCUMENTS AND SPECIFICATION

3.1 MOLEX DOCUMENTS

- [Squba 3.6 Interconnect System Test summary 2077760000-TS-000](#)
- [Squba 3.6 Interconnect System Application summary 2077760000-AS-000](#)
- [Molex Quality Crimping Handbook Order No. 63800-0029](#)
- [Molex Moisture Technical Advisory AS-45499-001](#)
- [Molex Package Handling Specification 454990100-PK](#)
- ATS – Application Tooling Specification*

*Application Tooling Specification for terminals is not provided in this document. ATS for terminals can be available from respective terminal part number page in Molex.com

3.2 INDUSTRY DOCUMENTS

- EIA-364-1000
- IEC-60529

4.0 ELECTRICAL PERFORMANCE RATINGS

4.1 VOLTAGE

600 Volts AC/DC

4.2 CURRENT AND APPLICABLE WIRES (MAXIMUM AMPERES)

Note: Ratings shown represent *MAXIMUM* current carrying capacity of a fully loaded connector with all circuits powered in air. Ratings are based on a 30°C maximum temperature rise limit over ambient (room temperature). Current is application dependent and below charts are intended as a guideline. Appropriate de-rating is required depending on factors such as higher ambient temperature, gross heating from adjacent modules or components and other factors that influence connector performance.

Wire AWG	Insulation Diameter, mm	Circuit Sizes		
		2	3	4
16	1.90 to 2.40	14.0 A	13.2 A*	12.5 A
18	1.46 to 2.10	11.5 A*	10.3 A*	9.2 A*
20	1.46 to 2.10	9.0 A	7.5 A*	6.0 A



*Interpolated Values

[Squba Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION: C	ECM INFORMATION: EC No: 625539 DATE: 2019/10/11	TITLE: PRODUCT SPECIFICATION SQUBA 3.6 INTERCONNECT SYSTEM	SHEET No. 4 of 14
DOCUMENT NUMBER: 2077760000-PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MUM
		CHECKED BY: ARAJGOVINDA	APPROVED BY: NCSR
TEMPLATE FILENAME: 1703070003 REV A			

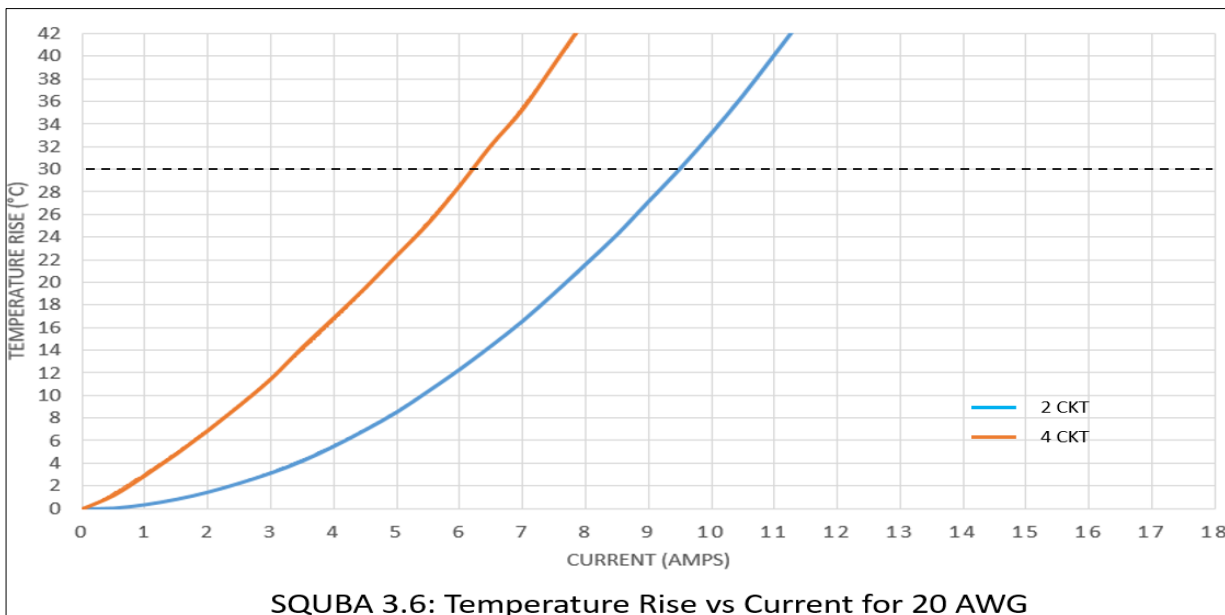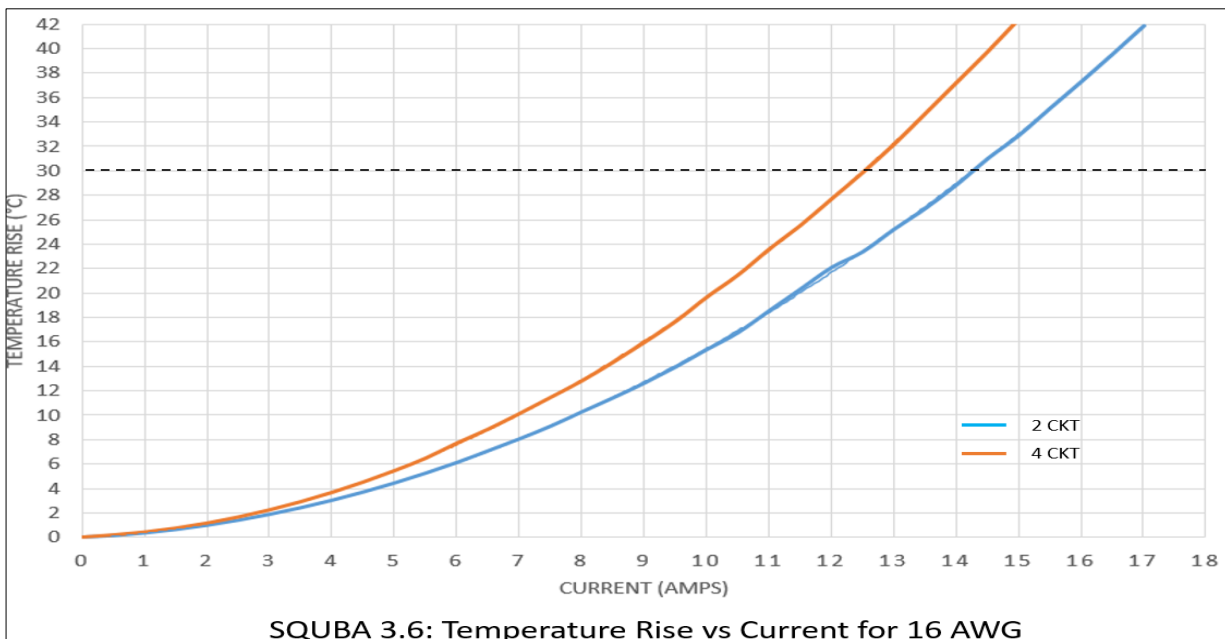


[Squba Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION: C	ECM INFORMATION: EC No: 625539 DATE: 2019/10/11	TITLE: PRODUCT SPECIFICATION SQUBA 3.6 INTERCONNECT SYSTEM	SHEET No. 5 of 14
DOCUMENT NUMBER: 2077760000-PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MUM
		CHECKED BY: ARAJUGOVINDA	APPROVED BY: NCSR
TEMPLATE FILENAME: 1703070003 REV A			

4.3 VOLTAGE DROP AT RATED CURRENT

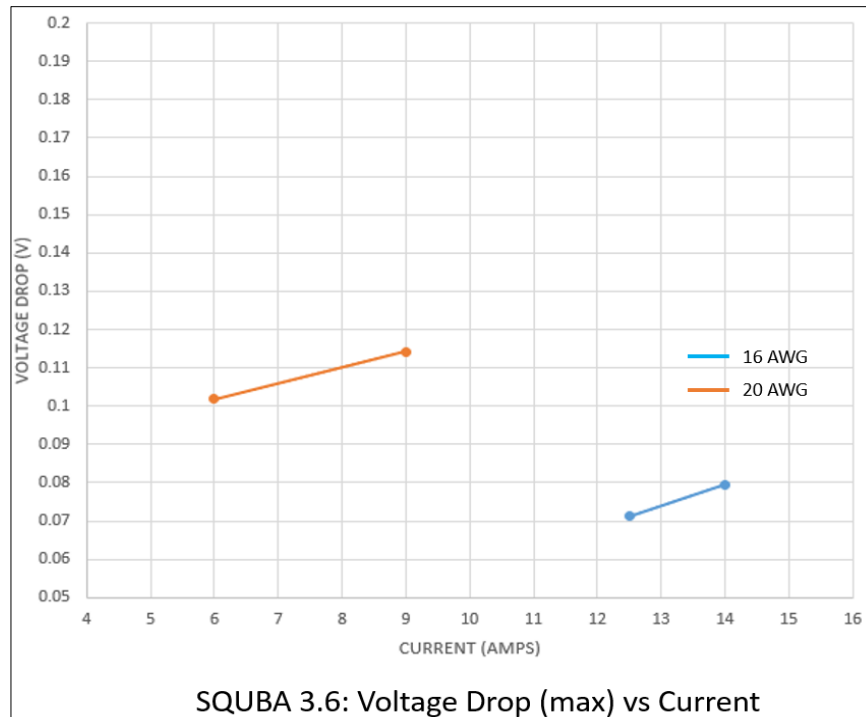

4.4 TEMPERATURE

Operating Temperature Range (includes T-Rise from applied current): - 40°C to + 105°C
 Non-Operating Range: -40°C to + 105°C

Field Temperature and Field Life: 60°C for 10 years (based EIA-364-1000, table 8)

Note: Temperature life test duration (section 6.3. item 1) is based on the assumption that the contact spends its entire life at the rated field maximum temperature (based on EIA-364-1000, table 8).

[Squba Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION: C	ECM INFORMATION: EC No: 625539 DATE: 2019/10/11	TITLE: PRODUCT SPECIFICATION SQUBA 3.6 INTERCONNECT SYSTEM	SHEET No. 6 of 14
DOCUMENT NUMBER: 2077760000-PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MUM
		CHECKED BY: ARAJUGOVINDA	APPROVED BY: NCSR
TEMPLATE FILENAME: 1703070003 REV A			

4.5 DURABILITY

Plating Type	Number of Cycles
Tin Plated	25

As tested in accordance with EIA-364-1000 test method (see sec 6.2.4 of this specification). Durability per EIA-364-09

4.6 GLOW WIRE SERIES

Series Under Evaluation: 207778, 207782

5.0 QUALIFICATION

Laboratory condition, sample selection and test sequences are in accordance with EIA-364-1000.

[Squba Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION: C	ECM INFORMATION: EC No: 625539 DATE: 2019/10/11	TITLE: PRODUCT SPECIFICATION SQUBA 3.6 INTERCONNECT SYSTEM				SHEET No. 7 of 14
DOCUMENT NUMBER: 2077760000-PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MUM	CHECKED BY: ARAJUGOVINDA	APPROVED BY: NCSR	
TEMPLATE FILENAME: 1703070003 REV A						

6.0 PERFORMANCE

6.1 ELECTRICAL PERFORMANCE

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
6.1.1	Contact Resistance (Low Level)	Mate connectors: apply a maximum voltage of 20 mV and a current of 100 mA. EIA-364-23	10 milliohms MAXIMUM [initial]
6.1.2	Insulation Resistance	Unmate & unmount connectors: apply a voltage of 500 VDC between adjacent terminals and between terminals to ground. EIA-364-21	1000 Megohms MINIMUM
6.1.3	Dielectric Withstanding Voltage	Unmate connectors: apply a voltage of 2200 VAC for 1 minute between adjacent terminals and between terminals to ground. EIA-364-20	No breakdown; current leakage < 5 mA
6.1.4	Temperature Rise (Current Profiling)	Mate connectors: measure the temperature rise at the rated current. EIA-364-70, Method 2	Temperature rise: +30°C MAXIMUM [Over ambient] See table under section 4.2
6.1.5	Temperature Rise (via Current Cycling)	Mate connectors: measure the temperature rise at the rated current after: 96 hours (steady state) 240 hours (45 minutes ON and 15 minutes OFF per hour) 96 hours (steady state) Steady state per EIA-364-70, Method 2. Current cycling per EIA-364-55, Test Condition A, Test Method 4	Temperature rise: +30°C MAXIMUM [Over ambient]

[Squba Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION: C	ECM INFORMATION: EC No: 625539 DATE: 2019/10/11	TITLE: PRODUCT SPECIFICATION SQUBA 3.6 INTERCONNECT SYSTEM	SHEET No. 8 of 14
DOCUMENT NUMBER: 2077760000-PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MUM
		CHECKED BY: ARAJUGOVINDA	APPROVED BY: NCSR
TEMPLATE FILENAME: 1703070003 REV A			

6.2 MECHANICAL PERFORMANCE

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
6.2.1	Connector Mate and Unmate Forces	Mate and unmate connector (male to female) at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	50 N (11.24 lbf) Maximum mate force & 10 N (2.25 lbf) MINIMUM unmate force
6.2.2	Terminal Retention Force (in Housing)	Axial pullout force on the terminal in the housing at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	40 N (8.99 lbf) MINIMUM retention force
6.2.3	Terminal Insertion Force (into Housing)	Apply an axial insertion force on the terminal at a rate of 25 ± 6 mm (1 ± ¼ inch).	15.0 N (3.37 lbf) MAXIMUM insertion force
6.2.4	Durability	Mate connectors up to 25 cycles at a maximum rate of 10 cycles per minute. EIA-364-09	20 milliohms MAXIMUM (change from initial)
6.2.5	Vibration (Random) Shock (Mechanical) EIA-364-1000 Test Group 3 (See section 7.0)	Mate connectors and vibrate per EIA 364-28, test condition VII, Letter D. Test Duration: 15 minutes each axis. Mate connectors and shock at 50 g's with ½ sine wave (11 milliseconds) shocks in the ±X, ±Y, ±Z axes (18 shocks total). EIA-364-27, Test Condition H	20 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond
6.2.6	Wire Pullout Force (Axial)	Apply an axial pullout force on the wire at a rate of 25 ± 6 mm (1 ± ¼ inch).	16 AWG = 88 N (19.8 lbf) 18 AWG = 88 N (19.8 lbf) 20 AWG = 36 N (8.09 lbf) MINIMUM pullout force according to UL1977
6.2.7	Connector Un-mate Force w/o Thumb Latch Locked (destructive)	Mate loaded connectors fully. Pull connectors apart at a rate of 25 ± 6mm (1 ± ¼ inch) per minute.	80 N (17.98 lbf) MINIMUM retention force

[Squba Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION: C	ECM INFORMATION: EC No: 625539 DATE: 2019/10/11	TITLE: PRODUCT SPECIFICATION SQUBA 3.6 INTERCONNECT SYSTEM	SHEET No. 9 of 14
DOCUMENT NUMBER: 2077760000-PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MUM
		CHECKED BY: ARAJUGOVINDA	APPROVED BY: NCSR
TEMPLATE FILENAME: 1703070003 REV A			

6.3 ENVIRONMENTAL PERFORMANCE

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
6.3.1	Temperature life EIA-364-1000 Test group 1 (See section 7.0)	Mate connectors; expose to: 240 hours at 105 ± 2°C. EIA-364-17, Method A	20 milliohms MAXIMUM (change from initial) & Visual: No Damage
6.3.2	Shock (Thermal) EIA-364-1000 Test group 2A & 2B (See section 7.0)	Mate connectors; expose to 5 cycles of: <u>Temperature °C</u> <u>Duration (Minutes)</u> -40 +0/-3 30 +25 ±10 5 MAXIMUM +105 +3/-0 30 +25 ±10 5 MAXIMUM EIA-364-32, Test Condition VIII	20 milliohms MAXIMUM (change from initial) & Visual: No Damage
6.3.3	IPX7 Temporary Water Immersion	IEC 60529, Ed. 2.1. Mate connectors and immerse in water at a depth of 1 meter from the water surface for 30 minutes.	No signs of water indicating ingress inside the connector system
6.3.4	IP6X Dust Exposure	IEC 60529, Ed. 2.1, Category 1 Enclosure. 2 hours duration.	No deposit of dust indicating ingress inside the connector system
6.3.5	Cyclic Temperature & Humidity EIA-364-1000 Test group 2A & 2B (See section 7.0)	Mate connectors: cycle per EIA-364-31: 24 cycles at temperature 25 ± 3°C at 80 ± 5% relative humidity and 65 ± 3°C at 50 ± 5% relative humidity; dwell time of 1.0 hour; ramp time of 0.5 hours.	20 milliohms MAXIMUM (change from initial) & Dielectric Withstanding Voltage: No Breakdown at 500 VAC & Insulation Resistance: 1000 Megohms MINIMUM & Visual: No Damage

[Scuba Connectors Web Page](#)


[TABLE OF CONTENTS](#)



REVISION: C	ECM INFORMATION: EC No: 625539 DATE: 2019/10/11	TITLE: PRODUCT SPECIFICATION SQUBA 3.6 INTERCONNECT SYSTEM	SHEET No. 10 of 14
DOCUMENT NUMBER: 2077760000-PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MUM
		CHECKED BY: ARAJGOVINDA	APPROVED BY: NCSR
TEMPLATE FILENAME: 1703070003 REV A			

7.0 TEST SEQUENCE GROUPS

Reliability Test Sequences per EIA-364-1000

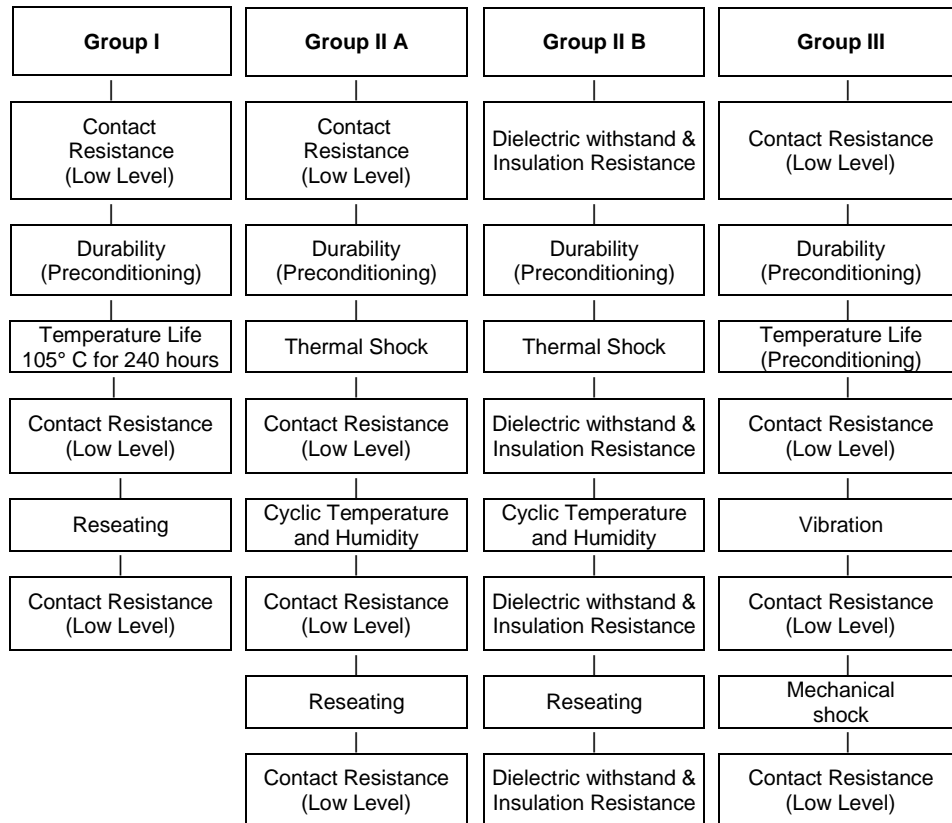


[Squba Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION: C	ECM INFORMATION: EC No: 625539 DATE: 2019/10/11	TITLE: PRODUCT SPECIFICATION SQUBA 3.6 INTERCONNECT SYSTEM	SHEET No. 11 of 14
DOCUMENT NUMBER: 2077760000-PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MUM
		CHECKED BY: ARAJUGOVINDA	APPROVED BY: NCSR
TEMPLATE FILENAME: 1703070003 REV A			

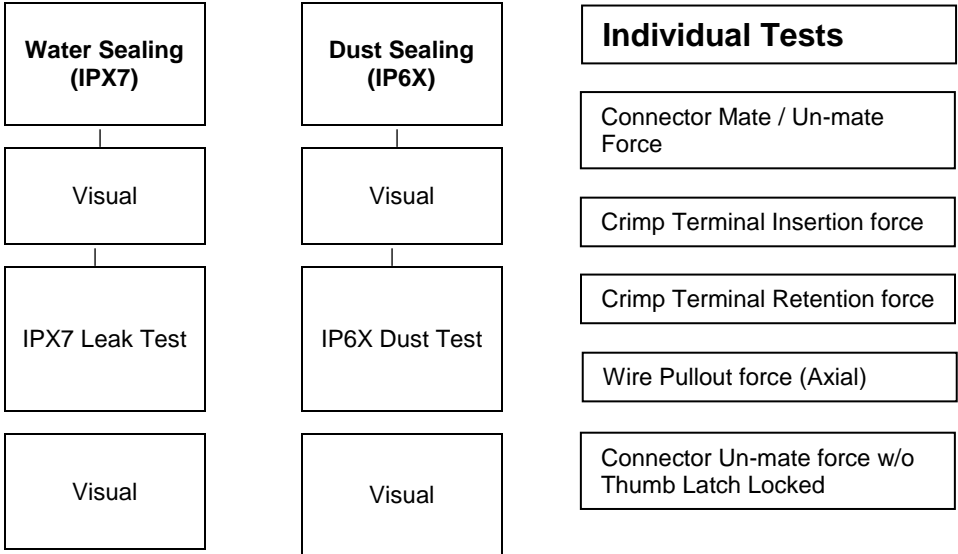

[Scuba Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION: C	ECM INFORMATION: EC No: 625539 DATE: 2019/10/11	TITLE: PRODUCT SPECIFICATION SQUBA 3.6 INTERCONNECT SYSTEM	SHEET No. 12 of 14
DOCUMENT NUMBER: 2077760000-PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MUM
		CHECKED BY: ARAJGOVINDA	APPROVED BY: NCSR
TEMPLATE FILENAME: 1703070003 REV A			


8.0 PACKAGING

Parts shall be packaged to protect the parts from damage during standard shipping, storage, and handling.

Plug Crimp Terminal Packaging Specification.....	2077760000-PK
Receptacle Crimp Terminal Packaging Specification.....	2077770000-PK
Plug Assembly Packaging Specification.....	2077780000-PK
Receptacle Assembly Packaging Specification.....	2077820000-PK

9.0 CABLE TIE AND / OR TWIST TIE LOCATION

CKT Size	Dim T Min.
2	50.8 mm (2.00")
3	50.8 mm (2.00")
4	76.2 mm (3.00")

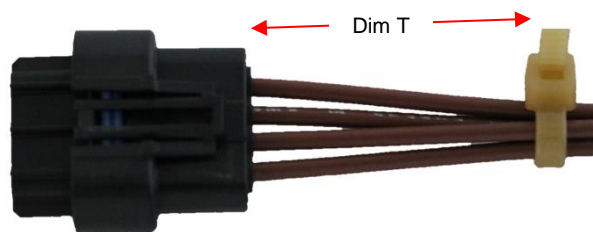

The "T" dimension defines a "free" length of wire, or a length of wire that is not subject to significant bias by external factors such as a wire tie, wire twisting, or other means of bending or deforming of the wires that repositions them from their natural relaxed state or location where they enter the housing. Wires are to be dressed in such a manner to allow the terminals to float freely in the pocket. This dimension is general recommendation and may need to be adjusted for different wire gauges and wire type and insulation thickness and insulation material.

[Squba Connectors Web Page](#)


[TABLE OF CONTENTS](#)



REVISION: C	ECM INFORMATION: EC No: 625539 DATE: 2019/10/11	TITLE: PRODUCT SPECIFICATION SQUBA 3.6 INTERCONNECT SYSTEM	SHEET No. 13 of 14
DOCUMENT NUMBER: 2077760000-PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MUM
		CHECKED BY: ARAJUGOVINDA	APPROVED BY: NCSR
TEMPLATE FILENAME: 1703070003 REV A			

10.0 POLARIZATION AND KEYING OPTIONS

10.1 Receptacle Assembly (Series: [207782](#))

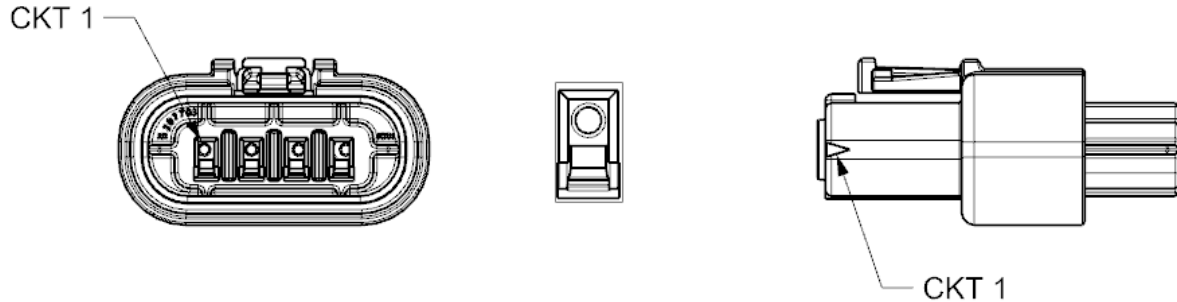

10.2 Plug Assembly (Series: [207778](#))



[Squba Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION: C	ECM INFORMATION: EC No: 625539 DATE: 2019/10/11	TITLE: PRODUCT SPECIFICATION SQUBA 3.6 INTERCONNECT SYSTEM	SHEET No. 14 of 14
DOCUMENT NUMBER: 2077760000-PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MUM
		CHECKED BY: ARAJGOVINDA	APPROVED BY: NCSR
TEMPLATE FILENAME: 1703070003 REV A			