

Distributed by:

**JAMECO**<sup>®</sup>  
ELECTRONICS


**www.Jameco.com ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 1300072

# 3.00mm (.118") Pitch Micro-Fit 3.0™ Wire-to-Wire Receptacle

**43025**  
Dual Row

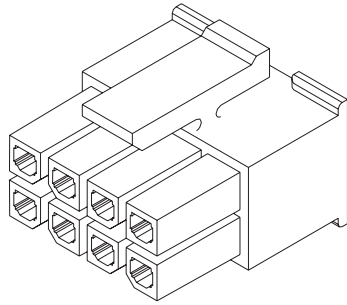

**Features and Benefits**

- Positive latching to mating headers or plugs
- Fully isolated contacts
- Fully polarized to mating headers and plugs
- Integral pull tabs for ease in unmating

**Reference Information**

Product Specification: PS-43045  
 Packaging: Bag  
 UL File No.: E29179  
 CSA File No.: LR19980  
 TUV License No.: R72040445  
 Mates With: 43020, 43045 and 44914  
 Use With: 43030  
 Designed In: Millimeters

**Physical**


Housing: Polyester, UL 94V-0

Circuits	Order No.
2	<a href="#">43025-0200</a>
4	<a href="#">43025-0400</a>
6	<a href="#">43025-0600</a>
8	<a href="#">43025-0800</a>
10	<a href="#">43025-1000</a>
12	<a href="#">43025-1200</a>

Circuits	Order No.
14	<a href="#">43025-1400</a>
16	<a href="#">43025-1600</a>
18	<a href="#">43025-1800</a>
20	<a href="#">43025-2000</a>
22	<a href="#">43025-2200</a>
24	<a href="#">43025-2400</a>

# 3.00mm (.118") Pitch Micro-Fit 3.0™ Wire-to-Wire Plug

**43020**  
Dual Row, with or without  
Panel Mount Ears

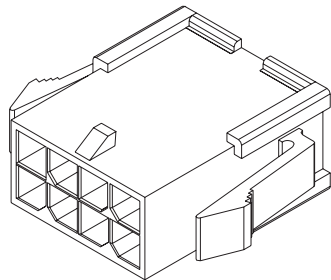

**Features and Benefits**

- Fully isolated contacts
- Fully polarized to mating receptacle
- Integral pull tabs for ease in unmating
- Optional panel mount ears

**Reference Information**

Product Specification: PS-43045  
 Packaging: Bag  
 UL File No.: E29179  
 CSA File No.: LR19980  
 TUV License No.: R72040445  
 Mates With: 43025  
 Use With: 43031  
 Designed In: Millimeters


**Physical**

Housing: Polyester, UL 94V-0



Circuits	Order No.	
	Panel Mount	Free Hanging
2	<a href="#">43020-0200</a>	<a href="#">43020-0201</a>
4	<a href="#">43020-0400</a>	<a href="#">43020-0401</a>
6	<a href="#">43020-0600</a>	<a href="#">43020-0601</a>
8	<a href="#">43020-0800</a>	<a href="#">43020-0801</a>
10	<a href="#">43020-1000</a>	<a href="#">43020-1001</a>
12	<a href="#">43020-1200</a>	<a href="#">43020-1201</a>

Circuits	Order No.	
	Panel Mount	Free Hanging
14	<a href="#">43020-1400</a>	<a href="#">43020-1401</a>
16	<a href="#">43020-1600</a>	<a href="#">43020-1601</a>
18	<a href="#">43020-1800</a>	<a href="#">43020-1801</a>
20	<a href="#">43020-2000</a>	<a href="#">43020-2001</a>
22	<a href="#">43020-2200</a>	<a href="#">43020-2201</a>
24	<a href="#">43020-2400</a>	<a href="#">43020-2401</a>

**Wire-to-Wire BMI Connector System**

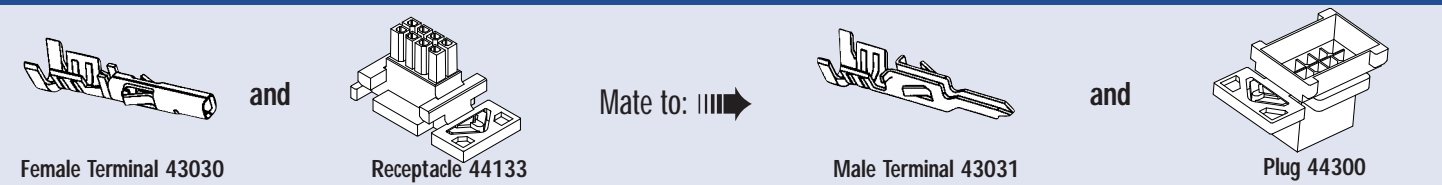


**Wire-to-Board BMI Connector System**

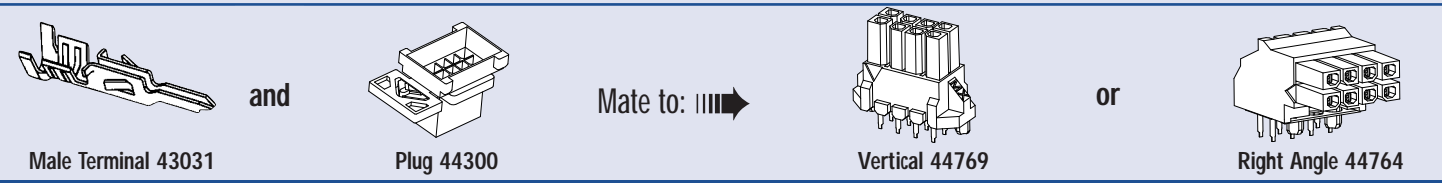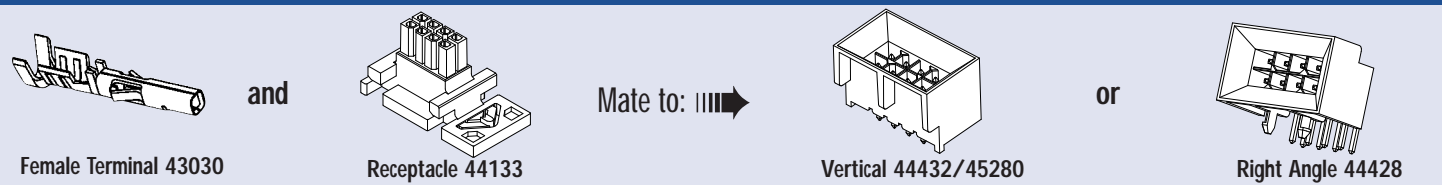


**Board-to-Board BMI Connector System**


**Horizontal Boards**

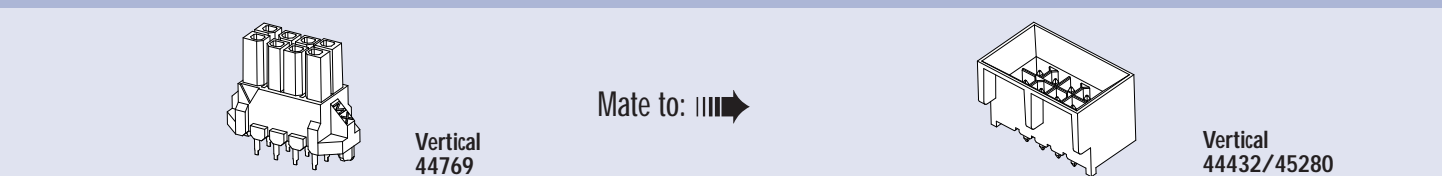

**Coplanar Boards**

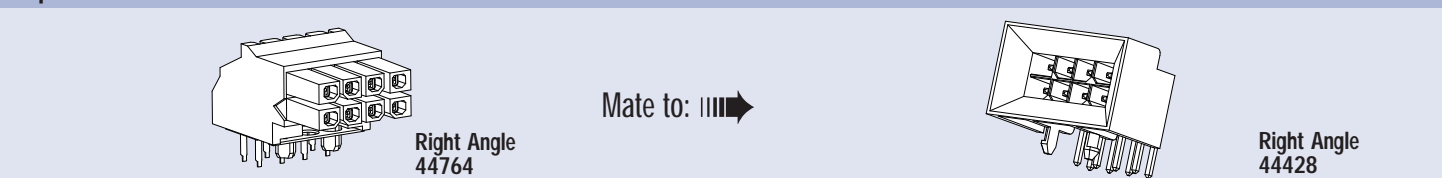


**Right Angle Boards**

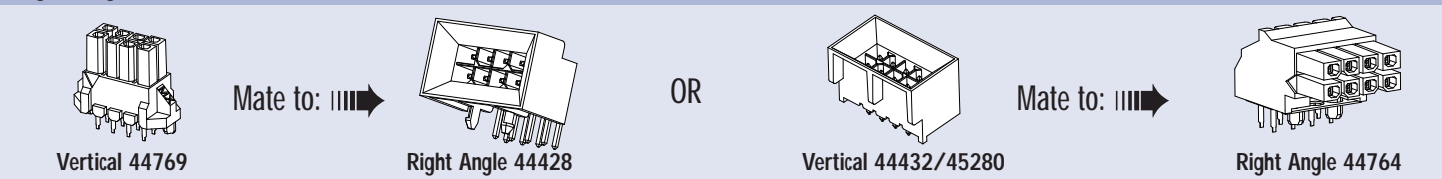

**MICRO-FIT 3.0 FAMILY APPLICATION EXAMPLES**

- Personal Computers
- Work Stations
- Vending Machines
- Mainframe Computers
- Satellites
- Pin Ball Machines
- Handheld Computers
- Cellular Telephones
- AC Power Line Cords
- Slot Machines
- Notebook PCs
- Coffeemakers
- Exercise Equipment
- Fan Tray Assemblies
- Fax Machines
- Backplane Applications
- Power Supplies

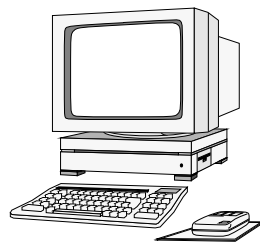

**Americas Headquarters**  
Lisle, Illinois 60532 U.S.A.  
Tel: 1-800-78MOLEX  
Fax: 630-969-1352

**Far East North Headquarters**  
Yamato, Kanagawa, Japan  
Tel: 81-462-65-2324  
Fax: 81-462-65-2366

**Far East South Headquarters**  
Jurong, Singapore  
Tel: 65-6-268-6868  
Fax: 65-6-265-2985

**European Headquarters**  
Munich, Germany  
Tel: 49-89-413092-0  
Fax: 49-89-401527

**Corporate Headquarters**  
2222 Wellington Ct.  
Lisle, IL 60532 U.S.A.  
Tel: 630-969-4550  
Fax: 630-969-1352

Visit our Web site at <http://www.molex.com>

- Fully isolated contacts
- Up to 5.0A per circuit
- Full polarization
- 250V AC rating
- Positive locks
- UL 94V-0, CSA, TUV approved

**Crimp Terminals**

	Description	Order No.		Wire Gauge	Plating
		Reel	Bag		
	Female Terminal	43030-0001	43030-0007	20 - 24	Tin
		43030-0004	43030-0010	26 - 30	
		43030-0002	43030-0008	20 - 24	15µ" Gold
		43030-0005	43030-0011	26 - 30	
		43030-0003	43030-0009	20 - 24	30µ" Gold
		43030-0006	43030-0012	26 - 30	
	Male Terminal	43031-0001	43031-0007	20 - 24	Tin
		43031-0004	43031-0010	26 - 30	
		43031-0002	43031-0008	20 - 24	15µ" Gold
		43031-0005	43031-0011	26 - 30	
		43031-0003	43031-0009	20 - 24	30µ" Gold
		43031-0006	43031-0012	26 - 30	

**Crimp Housings**

Description		Order No.	Material	Description		Order No.	Material
Receptacles (Use with 43030 terminals)				Plugs (Use with 43031 terminals)			
	Single Row	43645-XX00	Black Polyester		Single Row, Free Hanging	43640-XX01	Black Polyester
					Single Row, Panel Mount	43640-XX00	
	Dual Row	43025-XX00	Black Polyester		Dual Row, Free Hanging	43020-XX01	Black Polyester
					Dual Row, Panel Mount	43020-XX00	

**Right Angle Headers**

Single Row	Description	Order No.	Plating	Material	Dual Row	Description	Order No.	Plating	Material
	Surface Mount Compatible with Pegs	43650-XX00	Tin	High Temperature, Black LCP		Surface Mount Compatible with Pegs	43045-XX00	Tin	High Temperature, Black LCP
		43650-XX01	15µ" Gold				43045-XX01	15µ" Gold	
		43650-XX02	30µ" Gold				43045-XX02	30µ" Gold	
	SMT with Solderable Retention Clip	43650-XX09	Tin	High Temperature, Black LCP		SMT with Solderable Retention Clip	43045-XX06	Tin	High Temperature, Black LCP
		43650-XX10	15µ" Gold				43045-XX07	15µ" Gold	
		43650-XX11	30µ" Gold				43045-XX08	30µ" Gold	
	SMT with Solder Tabs	43650-XX12	Tin	High Temperature, Black LCP		SMT with Solder Tabs	43045-XX09	Tin	High Temperature, Black LCP
		43650-XX13	15µ" Gold				43045-XX10	15µ" Gold	
		43650-XX14	30µ" Gold				43045-XX11	30µ" Gold	

**Vertical Headers**

Single Row	Description	Order No.	Plating	Material	Dual Row	Description	Order No.	Plating	Material
	Surface Mount Compatible with Pegs	43650-XX15	Tin	High Temperature, Black LCP		Surface Mount Compatible with Pegs	43045-XX12	Tin	High Temperature, Black LCP
		43650-XX16	15µ" Gold				43045-XX13	15µ" Gold	
		43650-XX17	30µ" Gold				43045-XX14	30µ" Gold	
	SMT with Solderable Retention Clip	43650-XX21	Tin	High Temperature, Black LCP		SMT with Solderable Retention Clip	43045-XX15	Tin	High Temperature, Black LCP
		43650-XX22	15µ" Gold				43045-XX16	15µ" Gold	
		43650-XX23	30µ" Gold				43045-XX17	30µ" Gold	
	SMT with Solder Tabs	43650-XX24	Tin	High Temperature, Black LCP		SMT with Solder Tabs	43045-XX18	Tin	High Temperature, Black LCP
		43650-XX25	15µ" Gold				43045-XX19	15µ" Gold	
		43650-XX26	30µ" Gold				43045-XX20	30µ" Gold	

Replace XX with number of circuits, 02 to 24

**MICRO-FIT 3.0**


**molex® 3.00mm (.118") Pitch  
Micro-Fit 3.0™ Family**

The Micro-Fit 3.0 is a unique connector system that incorporates many of the features previously found only on large power connectors. These connectors are the perfect choice when you need compact connectors that can carry up to 5.0A of current. Micro-Fit 3.0 is available in circuit sizes 2 to 24 for wire-to-board and wire-to-wire applications. With more than 500 part numbers and still growing, this expansive product line offers through hole and SMT options. SMT versions are available in tape and reel packaging for robotic placement on the PCB.

**Wire-to-Wire Single Row Connector System**



**Wire-to-Board Single Row Connector System**

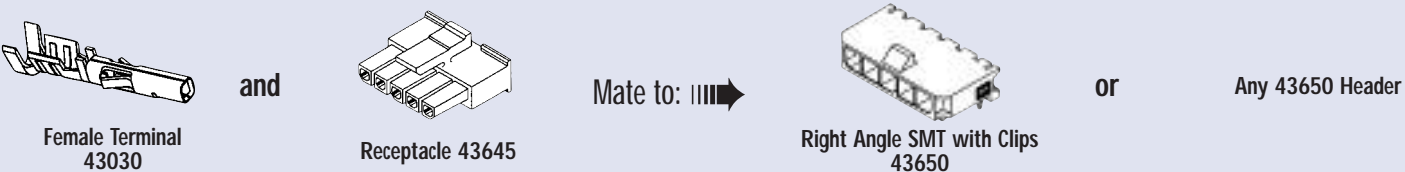

**Wire-to-Wire Dual Row Connector System**



**Wire-to-Board Dual Row Connector System**



**MICRO-FIT 3.0, CPI AND MICRO-FIT 3.0, BMI CPI**

The Micro-Fit 3.0, CPI (Compliant Pin Interface) and Micro-Fit 3.0, BMI CPI (Blind Mate Version with Compliant Pin Interface) are vertical header product extensions featuring press-fit PC tails.

- CPI style (Press-Fit) pins require no soldering to the PCB
- 2.36mm (.093") minimum PCB thickness

**Standard CPI**

	Description	Order No.	Plating	Material
	Standard Vertical CPI	44914-XX01	Tin	High Temperature, Black LCP
		44914-XX02	12µ" Gold	
		44914-XX03	30µ" Gold	

**BMI CPI**

	Blind Mate Vertical CPI	45280-XX01	Tin	High Temperature, Black Glass-Filled Nylon
		45280-XX02	12µ" Gold	
		45280-XX03	30µ" Gold	

**MICRO-FIT 3.0, BMI**

**molex® 3.00mm (.118") Pitch  
Micro-Fit 3.0™ Family**

Micro-Fit 3.0, BMI™ (Blind Mate Interface) features an innovative panel mounting design that securely locks the plugs and receptacles in place in the panel cutout, while allowing for removal. The plugs and headers feature a funnel entry to guide the mating receptacle or receptacle header into place. Micro-Fit 3.0, BMI housings and headers mate exclusively with the BMI components shown here.

- Full polarization
- Fully isolated contacts
- Dual row
- Sizes 4 to 24 circuits
- Up to 5.0A per circuit
- Up to 1500V AC dielectric withstand voltage
- UL 94V-0, CSA, TUV approved

**Crimp Housings**

- Use standard Micro-Fit terminals
- Receptacle floats in panel cutout up to 1.27mm (.050") in any direction
- Can be utilized with BMI board-to-board connectors
- Panel thickness: 1.57mm (.062")

	Description	Order No.	Material
	Panel Mount Receptacle	44133-XX00	Black, Polyester
	Panel Mount Plug	44300-XX00	Black, Polyester

**Headers**

- Can be utilized with BMI wire-to-wire connectors
- 1.57mm (.062") PCB thickness
- Surface mount compatible (SMC)
- Black, glass filled nylon housings

**Right Angle**

	Description	Order No.	Plating		Description	Order No.	Plating
	Right Angle Header with Pegs	44428-XX01	Tin		Right Angle Receptacle	44764-XX01	Tin
		44428-XX02	15µ" Gold			44764-XX02	15µ" Gold
		44428-XX03	30µ" Gold			44764-XX03	30µ" Gold

**Vertical**

	Vertical Header with Pegs	44432-XX01	Tin		Vertical Receptacle	44769-XX01	Tin
		44432-XX02	15µ" Gold			44769-XX02	15µ" Gold
		44432-XX03	30µ" Gold			44769-XX03	30µ" Gold

Replace XX with number of circuits, 04 to 24



# PRODUCT SPECIFICATION

## MICRO-FIT

### 1.0 SCOPE

This Product Specification covers the 3.00 mm (.118 inch) centerline (pitch) square pin headers when mated with either printed circuit board (PCB) connector or connectors terminated with 20 to 30 AWG wire using crimp technology.

### 2.0 PRODUCT DESCRIPTION

#### 2.1 PRODUCT NAME AND SERIES NUMBERS

Receptacle: 43025      Terminal: 43030  
Plug: 43020            Terminal: 43031  
Headers: 43045, 44914

Test Plug: 44242 (recommended for continuity testing only)

Other products conforming to this specification are noted on the individual drawings.

#### 2.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKINGS

Housings: Polyester or LCP  
Terminal: Phosphor Bronze  
Pins: Brass, Modified Tin/Brass

#### 2.3 SAFETY AGENCY APPROVALS

UL File Number: E29179  
CSA: LR19980  
TUV: 72040445

### 3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

Test Summary: TS-43045-001

### 4.0 RATINGS

#### 4.1 VOLTAGE

UL: 250 Volts AC (MAX) {or 176 Volts DC}  
TUV: 250 Volts

**4.2 CURRENT AND APPLICABLE WIRES** (Current is dependent on connector size, contact material, plating, ambient temperature, printed circuit board characteristics and related factors. Actual current rating is application dependent and should be evaluated for each application.)

AWG	Amps	Max. Outside Insulation Diameter
20	5	1.85 mm (.073 inch)
22	5	1.85 mm (.073 inch)
24	4	1.85 mm (.073 inch)
26	3	1.27 mm (.050 inch)
28	2	1.27 mm (.050 inch)
30	1	1.27 mm (.050 inch)

#### 4.2.1 CURRENT FOR TEST PLUG 44242

2.5 Amps Maximum (Pogo pin current capacity)

(Test plugs are for testing purposes only and not intended for continuous use.)

#### 4.3 TEMPERATURE

Operating: - 40°C to + 105°C (Including Terminal Temperature Rise)  
Nonoperating: - 40°C to + 105°

<b>REVISION:</b>  <b>L</b>	<b>EGR/ECN INFORMATION:</b> <b>EC No: UCP2007-1024</b> <b>DATE: 2006/10/24</b>	<b>TITLE:</b> <b>PRODUCT SPECIFICATION</b> <b>MICRO-FIT</b> <b>DUAL ROW CONNECTORS</b>	<b>SHEET No.</b>  <b>1 of 5</b>
<b>DOCUMENT NUMBER:</b> <b>PS-43045</b>		<b>CREATED / REVISED BY:</b> <b>M.KIPPER</b>	<b>CHECKED BY:</b> <b>S.SOUSEK</b>
		<b>APPROVED BY:</b> <b>F.SMITH</b>	



# PRODUCT SPECIFICATION

## 5.0 PERFORMANCE

### 5.1 ELECTRICAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
<b>Contact Resistance (Low Level)</b>	Mate connectors: apply a maximum voltage of 20 mV and a current of 100 mA. (Does not include wire resistance)	10 milliohms MAXIMUM [initial]
<b>Contact Resistance @ Rated Current</b>	Mate connectors: apply a maximum voltage of 20 mV at rated current.	30 milliohms MAXIMUM [initial]
<b>Contact Resistance of Wire Termination (Low Level)</b>	Terminate the applicable wire to the terminal and measure wire using a voltage of 20 mV and a current of 100 mA.	5 milliohms MAXIMUM [initial]
<b>Insulation Resistance</b>	Unmate & unmount connectors: apply a voltage of 500 VDC between adjacent terminals and between terminals to ground.	1000 Megohms MINIMUM
<b>Dielectric Withstanding Voltage</b>	Unmate connectors: apply a voltage of {two times the rated voltage plus 1000 volts} VAC for 1 minute between adjacent terminals and between terminals to ground.	No breakdown; current leakage < 5 mA
<b>Capacitance</b>	Measure between adjacent terminals at 1 MHz.	2 picofarads MAXIMUM
<b>Temperature Rise (via Current Cycling)</b>	Mate connectors: measure the temperature rise at the rated current after: 1) 96 hours (steady state) 2) 240 hours (45 minutes ON and 15 minutes OFF per hour) 3) 96 hours (steady state)	Temperature rise: +30°C MAXIMUM

### 5.2 MECHANICAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
<b>Connector Mate and Unmate Forces</b>	Mate and unmate connector (male to female) at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute. (Per circuit)	8.0 N (1.8 lbf) MAXIMUM insertion force & 3.7 N (0.8 lbf) MINIMUM withdrawal force
<b>Terminal Retention Force (in Housing)</b>	Axial pullout force on the terminal in the housing at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	24.5 N (5.5 lbf) MINIMUM retention force
<b>Terminal Insertion Force (into Housing)</b>	Apply an axial insertion force on the terminal at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	14.7 N (3.3 lbf) MAXIMUM insertion force

REVISION: <b>L</b>	EGR/ECN INFORMATION: EC No: <b>UCP2007-1024</b> DATE: <b>2006/10/24</b>	TITLE: <b>PRODUCT SPECIFICATION MICRO-FIT DUAL ROW CONNECTORS</b>	SHEET No. <b>2 of 5</b>
DOCUMENT NUMBER: <b>PS-43045</b>	CREATED / REVISED BY: <b>M.KIPPER</b>	CHECKED BY: <b>S.SOUSEK</b>	APPROVED BY: <b>F.SMITH</b>



# PRODUCT SPECIFICATION

## 5.2 MECHANICAL REQUIREMENTS

<b>Durability</b>	Mate connectors up to 30 cycles at a maximum rate of 10 cycles per minute prior to Environmental Tests.	20 milliohms MAXIMUM (change from initial)
<b>Vibration (Random)</b>	Mate connectors and vibrate per EIA 364-28, test condition VII.	20 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond
<b>Shock (Mechanical)</b>	Mate connectors and shock at 50 g's with ½ sine wave (11 milliseconds) shocks in the ±X,±Y,±Z axes (18 shocks total).	20 milliohms MAXIMUM (change from initial)] & Discontinuity < 1 microsecond
<b>Wire Pullout Force (Axial)</b> (Wire from Terminal)	Apply an axial pullout force on the wire at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	MINIMUM pullout force 20 awg: 57.8 N (13.0 lbf) 22 awg: 35.6 N (8.0 lbf) 24 awg: 22.2 N (5.0 lbf) 26 awg: 13.3 N (3.0 lbf) 28 awg: 8.9 N (2.0 lbf) 30 awg: 6.6 N (1.5 lbf)
<b>Normal Force</b>	Apply a perpendicular force.	2.7 N (275 grams) MINIMUM
<b>Pin to Header Retention</b>	Apply axial push force to pin at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	13.7 N (3.1 lbf) MINIMUM pushout force
<b>Thumb Latch to Ramp Yield Strength</b>	Full mate and then Unmate the connectors at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	68.4 N (15.4 lbf) MINIMUM Yield Strength
<b>Panel Mount Retention</b>	Full mate and then Unmate the connectors at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	155.7 N (35 lbf) MINIMUM pushout force
<b>Compliant Pin Insertion Force into PCB Hole (44914 Series)</b>	Apply an axial insertion force on the terminal at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	106.7 N (24 lbf) MAXIMUM Insertion force (Per Terminal)
<b>Compliant Pin Retention Force in PCB Hole (44914 Series)</b>	Apply an axial extraction force on the terminal at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	35.6 N (8 lbf) MINIMUM Retention force (Per Terminal)

<b>REVISION:</b>  <b>L</b>	<b>EGR/ECN INFORMATION:</b> EC No: <b>UCP2007-1024</b> DATE: <b>2006/10/24</b>	<b>TITLE:</b> <b>PRODUCT SPECIFICATION MICRO-FIT DUAL ROW CONNECTORS</b>	<b>SHEET No.</b>  <b>3 of 5</b>
<b>DOCUMENT NUMBER:</b> <b>PS-43045</b>	<b>CREATED / REVISED BY:</b> <b>M.KIPPER</b>	<b>CHECKED BY:</b> <b>S.SOUSEK</b>	<b>APPROVED BY:</b> <b>F.SMITH</b>



# PRODUCT SPECIFICATION

## 5.3 ENVIRONMENTAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
<b>Thermal Aging</b>	Mate connectors; expose to: 240 hours at 105 ± 2°C OR 500 hours at 85 ± 2°C	20 milliohms MAXIMUM (change from initial)]
<b>Humidity (Steady State)</b>	Mate connectors: expose to a temperature of 40 ± 2°C with a relative humidity of 90-95% for 96 hours.  Note: Remove surface moisture and air dry for 1 hour prior to measurements.	20 milliohms MAXIMUM (change from initial) & Dielectric Withstanding Voltage: No Breakdown at 500 VAC & Insulation Resistance: 1000 Megohms MINIMUM
<b>Solderability</b>	Per SMES-152	Solder coverage: 95% MINIMUM (per SMES-152)
<b>Solder Resistance</b>	A) Wave Solder Process Dip connector terminal tails in solder; Solder Duration: 5 ± 0.5 seconds; Solder Temperature: 260°C MAX  B) Convection Reflow Solder Process 235°C MAX Per SMES-152	Visual: No Damage to insulator material
<b>Cold Resistance</b>	Mate connectors: Duration: 96 hours; Temperature: -40 ± 3°C	20 milliohms MAXIMUM (change from initial)

## 6.0 PACKAGING

Parts shall be packaged to protect against damage during handling, transit and storage per the packaging specifications listed below:

Receptacle: PK-43025-001

Plug: PK-43020-001

Headers: PK-70873-0313, PK-70873-0314, PK-70873-05\*\*.

<b>REVISION:</b>  <b>L</b>	<b>EGR/ECN INFORMATION:</b> EC No: <b>UCP2007-1024</b> DATE: <b>2006/10/24</b>	<b>TITLE:</b> <b>PRODUCT SPECIFICATION MICRO-FIT DUAL ROW CONNECTORS</b>	<b>SHEET No.</b>  <b>4 of 5</b>
<b>DOCUMENT NUMBER:</b> <b>PS-43045</b>	<b>CREATED / REVISED BY:</b> <b>M.KIPPER</b>	<b>CHECKED BY:</b> <b>S.SOUSEK</b>	<b>APPROVED BY:</b> <b>F.SMITH</b>





# PRODUCT SPECIFICATION


## 7.0 GAGES AND FIXTURES

It is recommended that test plugs (Series 44242) be used for continuity testing of receptacles. Standard mating parts should not be used for harness testing.

## 8.0 OTHER INFORMATION

### 8.1 CABLE TIE AND OR WIRE TWIST LOCATION


CKT Sizes	Dim T	Min.
2-8	.500	(12.70)
10-16	.750	(19.10)
18-24	1.000	(25.40)

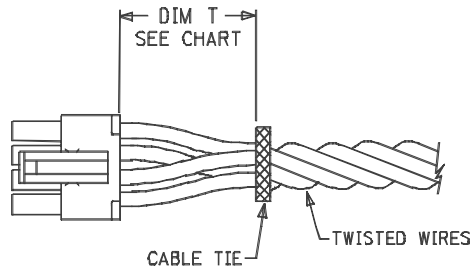


REVISION: <b>L</b>	EGR/ECN INFORMATION: EC No: <b>UCP2007-1024</b> DATE: <b>2006/10/24</b>	TITLE: <b>PRODUCT SPECIFICATION MICRO-FIT DUAL ROW CONNECTORS</b>	SHEET No. <b>5 of 5</b>
DOCUMENT NUMBER: <b>PS-43045</b>	CREATED / REVISED BY: <b>M.KIPPER</b>	CHECKED BY: <b>S.SOUSEK</b>	APPROVED BY: <b>F.SMITH</b>

ASSEMBLY ITEM NUMBER	PART CHARACTERISTICS	
	NUMBER OF POSITION	PANEL MOUNT OPTION
43020-0200	02	YES
43020-0201	02	NO
43020-0400	04	YES
43020-0401	04	NO
43020-0600	06	YES
43020-0601	06	NO
43020-0800	08	YES
43020-0801	08	NO
43020-1000	10	YES
43020-1001	10	NO
43020-1200	12	YES
43020-1201	12	NO
43020-1400	14	YES
43020-1401	14	NO
43020-1600	16	YES
43020-1601	16	NO
43020-1800	18	YES
43020-1801	18	NO
43020-2000	20	YES
43020-2001	20	NO
43020-2200	22	YES
43020-2201	22	NO
43020-2400	24	YES
43020-2401	24	NO


CKT. NO.	DIM. 'A'	DIM. 'B'	DIM. 'C'	DIM. 'D'
2	.152/(3.86)	N/A	.166/(4.21)	.311/(7.90)
4	.270/(6.85)	.118/(3.00)	.284/(7.21)	.429/(10.90)
6	.388/(9.85)	.236/(6.00)	.402/(10.21)	.547/(13.89)
8	.506/(12.85)	.354/(9.00)	.520/(13.21)	.665/(16.89)
10	.624/(15.85)	.472/(12.00)	.638/(16.21)	.783/(19.89)
12	.742/(18.85)	.591/(15.00)	.756/(19.21)	.901/(22.89)
14	.860/(21.85)	.709/(18.00)	.874/(22.21)	1.019/(25.88)
16	.978/(24.85)	.827/(21.00)	.992/(25.21)	1.137/(28.88)
18	1.096/(27.85)	.945/(24.00)	1.110/(28.21)	1.255/(31.88)
20	1.215/(30.85)	1.063/(27.00)	1.229/(31.21)	1.373/(34.87)
22	1.333/(33.85)	1.181/(30.00)	1.347/(34.21)	1.491/(37.87)
24	1.451/(36.85)	1.299/(33.00)	1.465/(37.21)	1.609/(40.87)

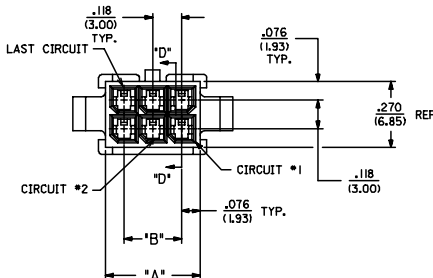




- NOTES:
- 1) HOUSING MATERIAL: UNFILLED POLYESTER (PBT), UL 94V-0  
COLOR - BLACK
  - 2) PRODUCT SPECIFICATION: PS-43045
  - 3) THIS HOUSING MATES WITH MICRO-FIT RECEPTACLE #43025-\*\*\*\*\*
  - 4) THIS HOUSING TO BE USED WITH MOLEX MALE TERMINAL #43031-\*\*\*\*\*
  - 5) DESIGNED FOR .055(1.4) MINIMUM TO A .100(2.54) MAXIMUM THICK PANEL OR PRINTED CIRCUIT BOARD.
  - 6) SEE SECTION "D"- "D" FOR TERMINAL ORIENTATION IN HOUSING.
  - 7) PANEL MOUNT FEATURES MUST LOCK ON SIDE OPPOSITE PUNCH SIDE FOR OPTIMUM RETENTION.

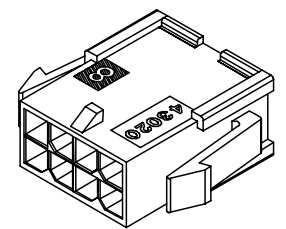


PLUG WITH OPTIONAL PANEL MOUNTS  
ISO VIEW  
(8 CIRCUIT SHOWN)

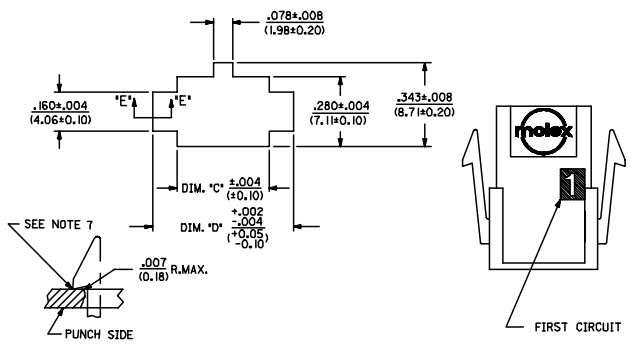

SECTION "E"- "E"  
(NO SCALE)  
RECOMMENDED PANEL CUT-OUT

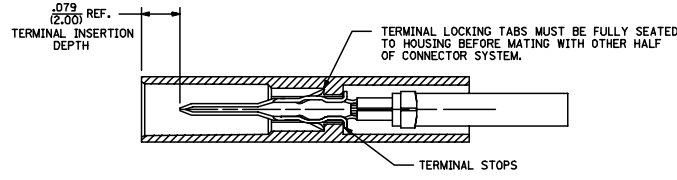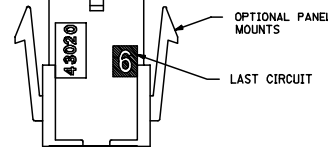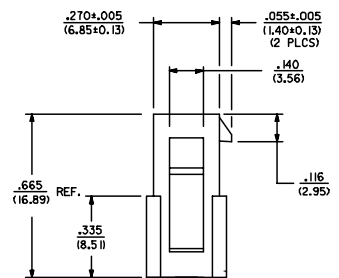

SECTION "B"- "B"

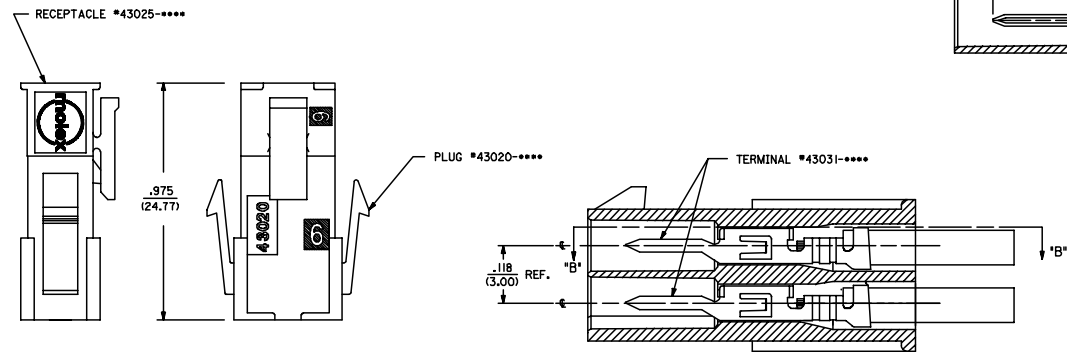

MATED MICRO-FIT CONNECTOR

SECTION "D"- "D"  
WITH TERMINAL  
(SCALE 8X)

<b>UPDATED NOTES</b> EEC NO: UCP2006-0610 DRN:SSWISSEK 2005/12/15 CHKD:SSWISSEK 2005/12/16 APPR:FSM:JH 2005/12/21	<b>QUALITY SYMBOLS</b> ▽=0 ▽=0	<b>GENERAL TOLERANCES (UNLESS SPECIFIED)</b>		<b>DIMENSION STYLE</b> IN/MM		<b>SCALE</b> 4:1	<b>DESIGN UNITS</b> METRIC	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± ---	3 PLACES ± --- ± .010	DRAWN BY AFG	DATE 1993/01/07	<b>TITLE</b> MICRO-FIT(3.0) 2 THRU 24 CIRCUIT PLUG WITH OPTIONAL PANEL MOUNTS			
		2 PLACES ± 0.25 ± .014	1 PLACE ± 0.35 ± ---	CHECKED BY BAP	DATE 1993/01/07	<b>MOLEX INCORPORATED</b>			
		ANGULAR ±1/2°		APPROVED BY RAS	DATE 1993/01/07	MATERIAL NO. SEE CHART	DOCUMENT NO. SDA-43020-*****	SHEET NO. 1 OF 1	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					